



US010612227B2

(12) **United States Patent**
Elliott, Jr. et al.

(10) **Patent No.:** **US 10,612,227 B2**
(45) **Date of Patent:** **Apr. 7, 2020**

(54) **MODULAR STORM WATER MANAGEMENT SYSTEMS AND METHODS OF ASSEMBLING THE SAME**

(58) **Field of Classification Search**
CPC E03F 1/008; E01C 11/226; E01F 5/00;
E02B 11/00

See application file for complete search history.

(71) Applicant: **Jensen Enterprises, Inc.**, Sparks, NV (US)

(56) **References Cited**

(72) Inventors: **Thomas P. Elliott, Jr.**, Reno, NV (US);
Tyler R. Haack, Redlands, CA (US);
Joseph P. Peterson, Reno, NV (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Jensen Enterprises, Inc.**, Sparks, NV (US)

3,724,141	A	4/1973	Kelleher	
3,910,051	A	10/1975	Komisarek	
4,068,420	A	1/1978	Rice	
4,797,030	A	1/1989	Lockwood	
4,825,494	A	5/1989	King	
4,983,070	A	1/1991	Hwang	
6,779,946	B1	8/2004	Urriola et al.	
7,344,335	B2	3/2008	Burkhart	
7,530,764	B1	5/2009	Gallegos	
8,708,601	B2	4/2014	Elliott	
8,770,890	B2*	7/2014	May	E03F 1/002 405/126
9,809,938	B2	11/2017	Elliott	
10,145,241	B1	12/2018	Tessien	

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/503,385**

(22) Filed: **Jul. 3, 2019**

(65) **Prior Publication Data**

US 2020/0011047 A1 Jan. 9, 2020

Related U.S. Application Data

(63) Continuation-in-part of application No. 16/027,128, filed on Jul. 3, 2018, now Pat. No. 10,435,880.

(60) Provisional application No. 62/694,389, filed on Jul. 5, 2018.

(51) **Int. Cl.**
E03F 1/00 (2006.01)
E01F 5/00 (2006.01)
E02B 11/00 (2006.01)

(52) **U.S. Cl.**
CPC *E03F 1/005* (2013.01)

(Continued)


Primary Examiner — Benjamin F Fiorello

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear LLP

(57) **ABSTRACT**

A storm water drain system and methods of assembling the same are provided. The system can be arranged to provide a water management function such as retention, detention, conveyance, or infiltration. The system can include a plurality of support modules positioned adjacent to one another to form a top deck, a bottom deck, and an interior space between the top deck and the bottom deck. The plurality of support modules can include a support module that has a bottom corbel extending from an outer surface of the support module. The bottom corbel can be located within the interior space and have a surface that contacts a portion of the bottom deck.

20 Claims, 44 Drawing Sheets

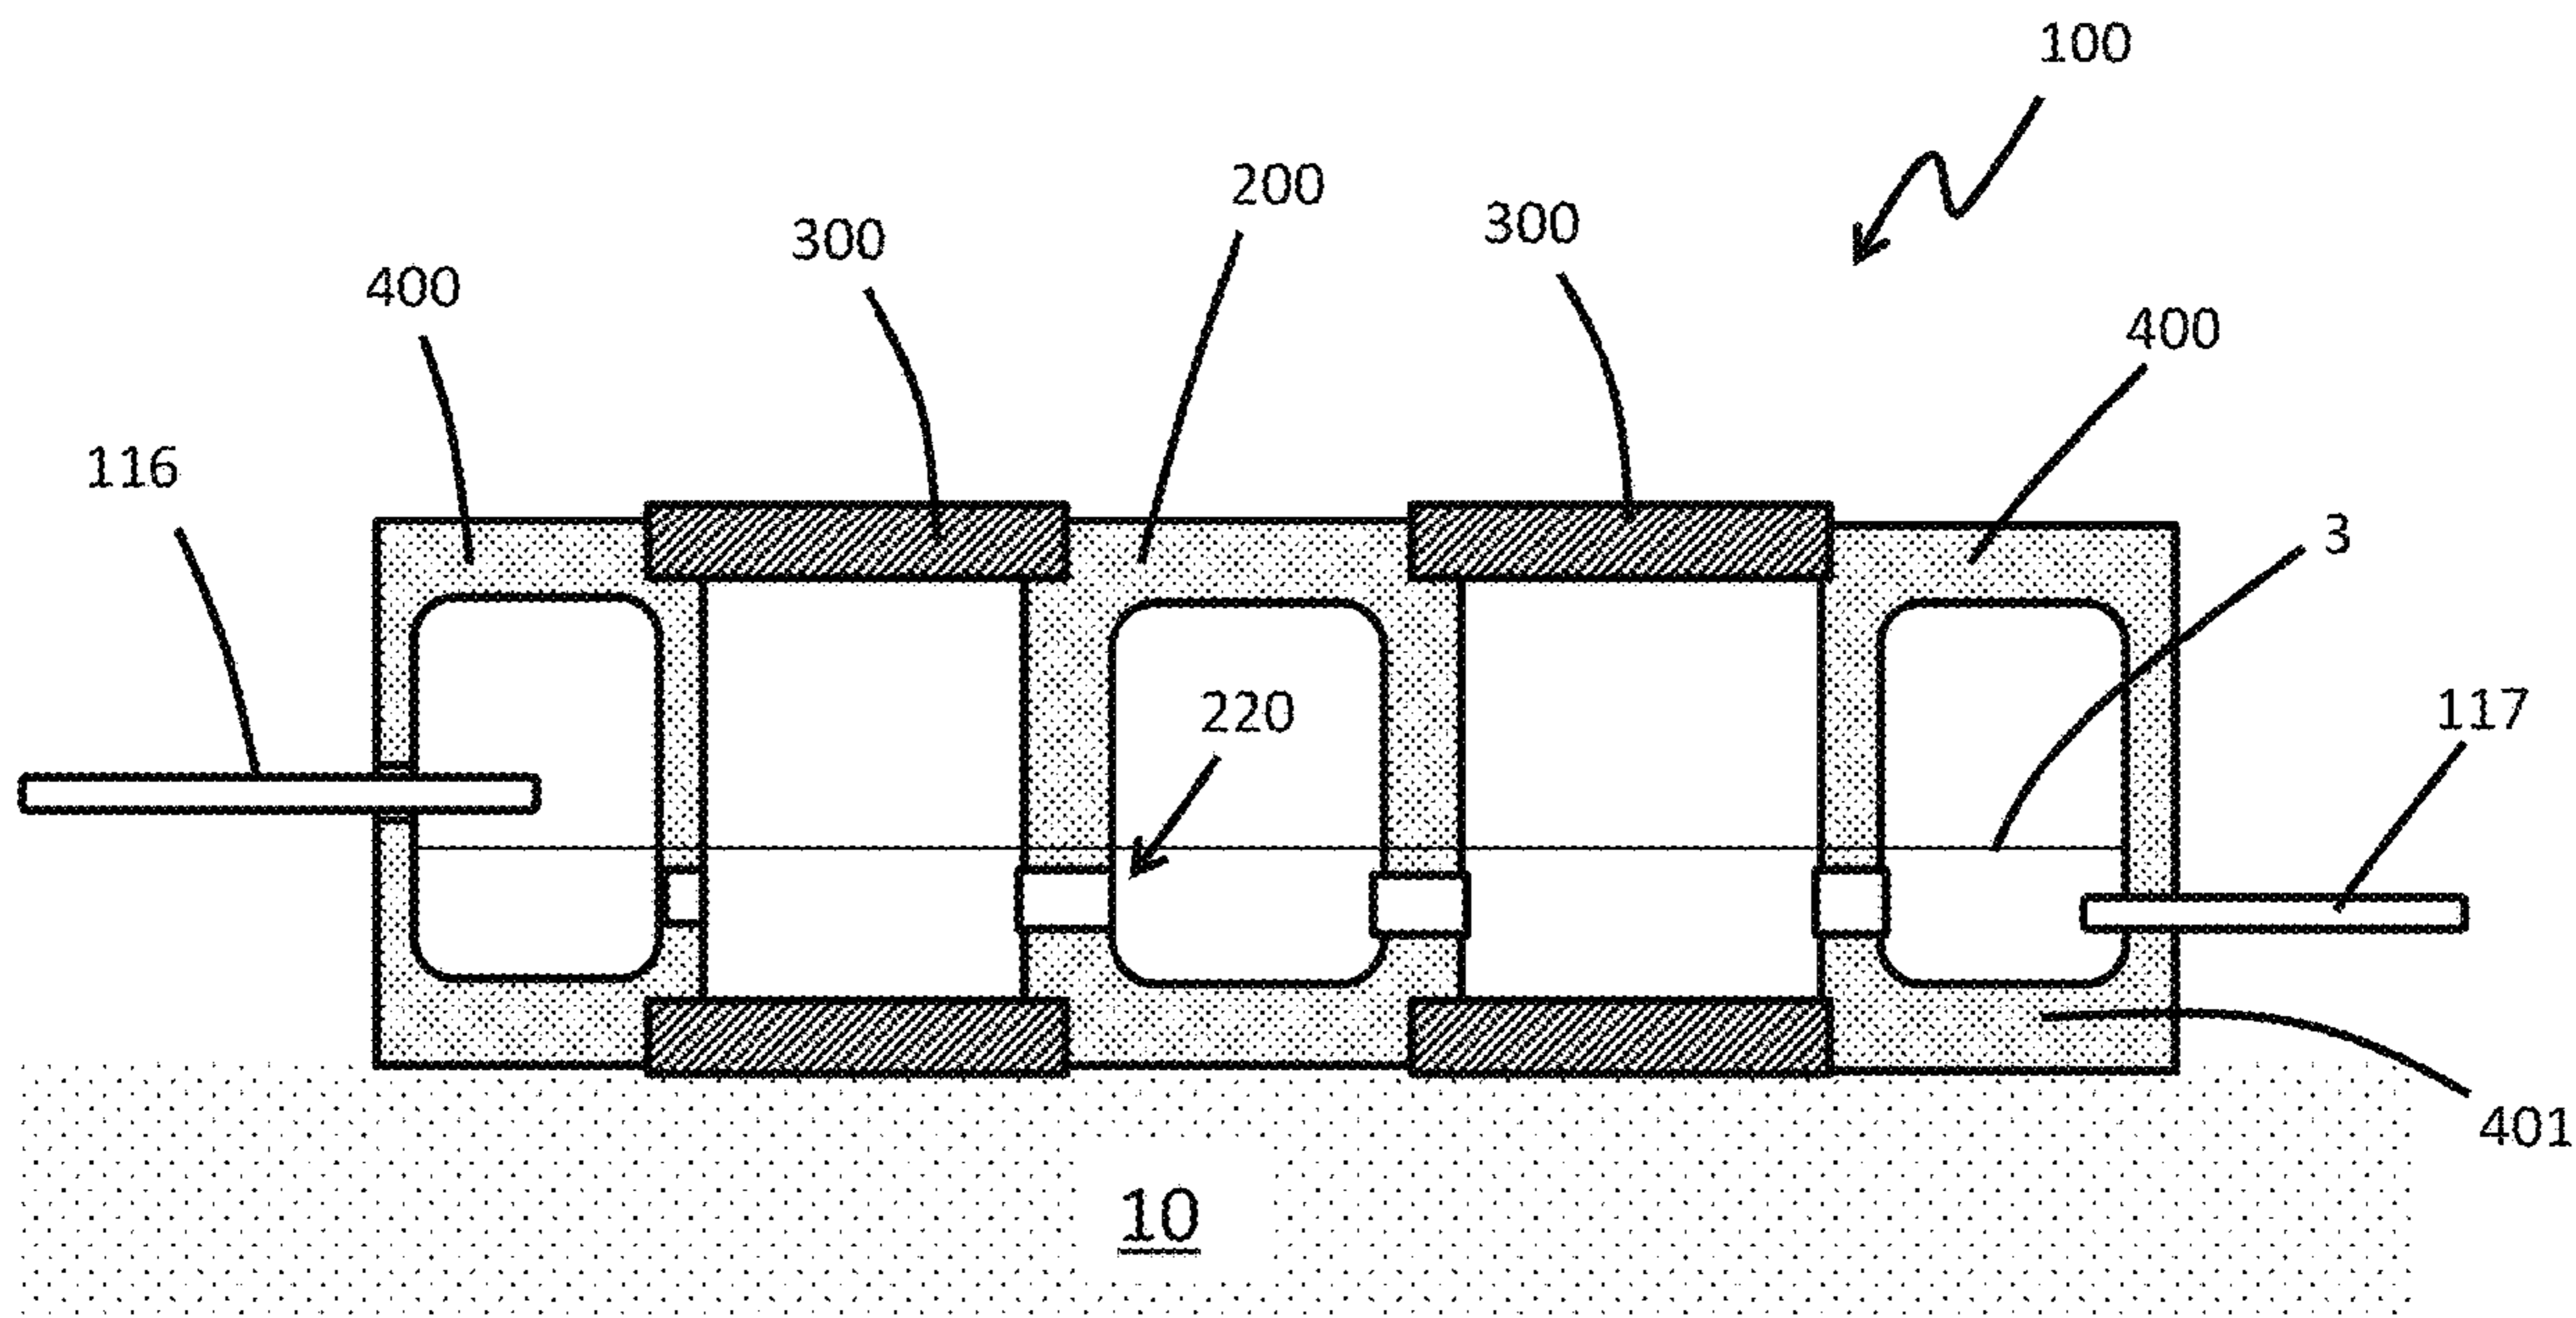

(56)

References Cited

U.S. PATENT DOCUMENTS

2003/0091394	A1 *	5/2003	Ide	E01F 8/00 405/132
2009/0067928	A1	3/2009	Curri van	
2010/0221068	A1	9/2010	Burkhart, Sr. et al.	
2015/0151914	A1	6/2015	Boulton et al.	
2016/0116112	A1	4/2016	Bradfield et al.	
2017/0328051	A1	11/2017	Miskovich	
2018/0030712	A1	2/2018	Kent et al.	

* cited by examiner

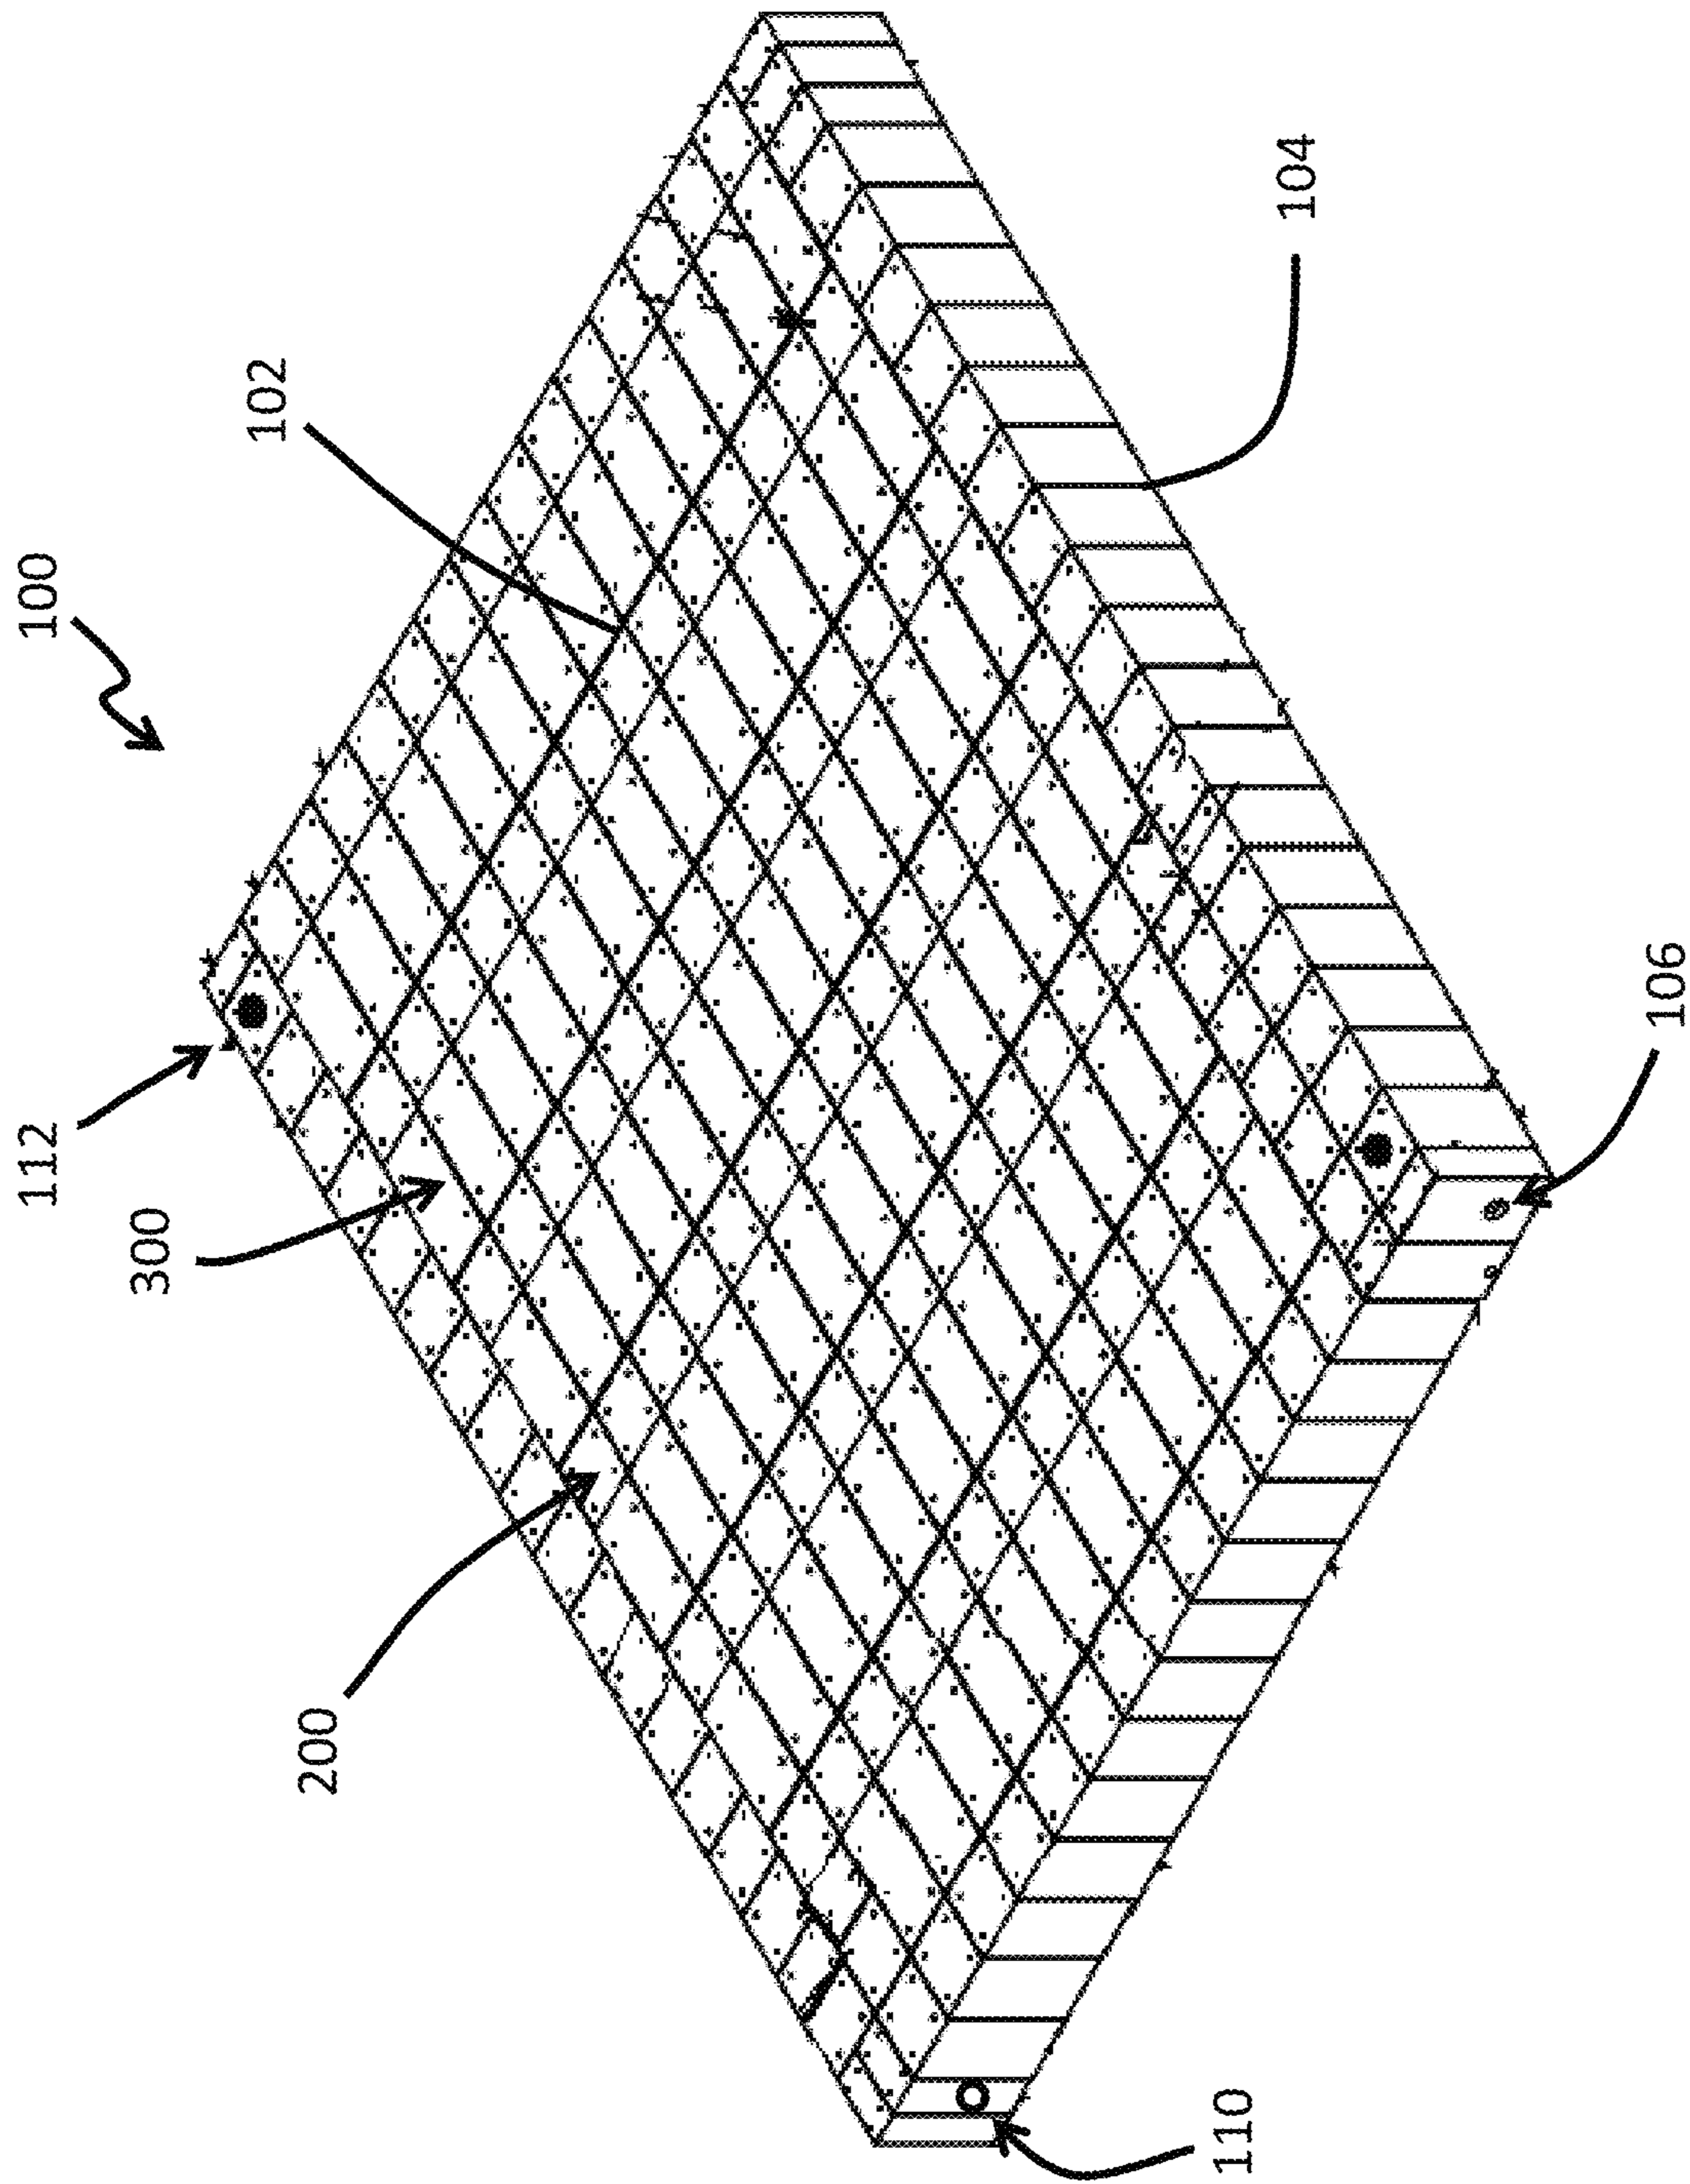


FIG. 1

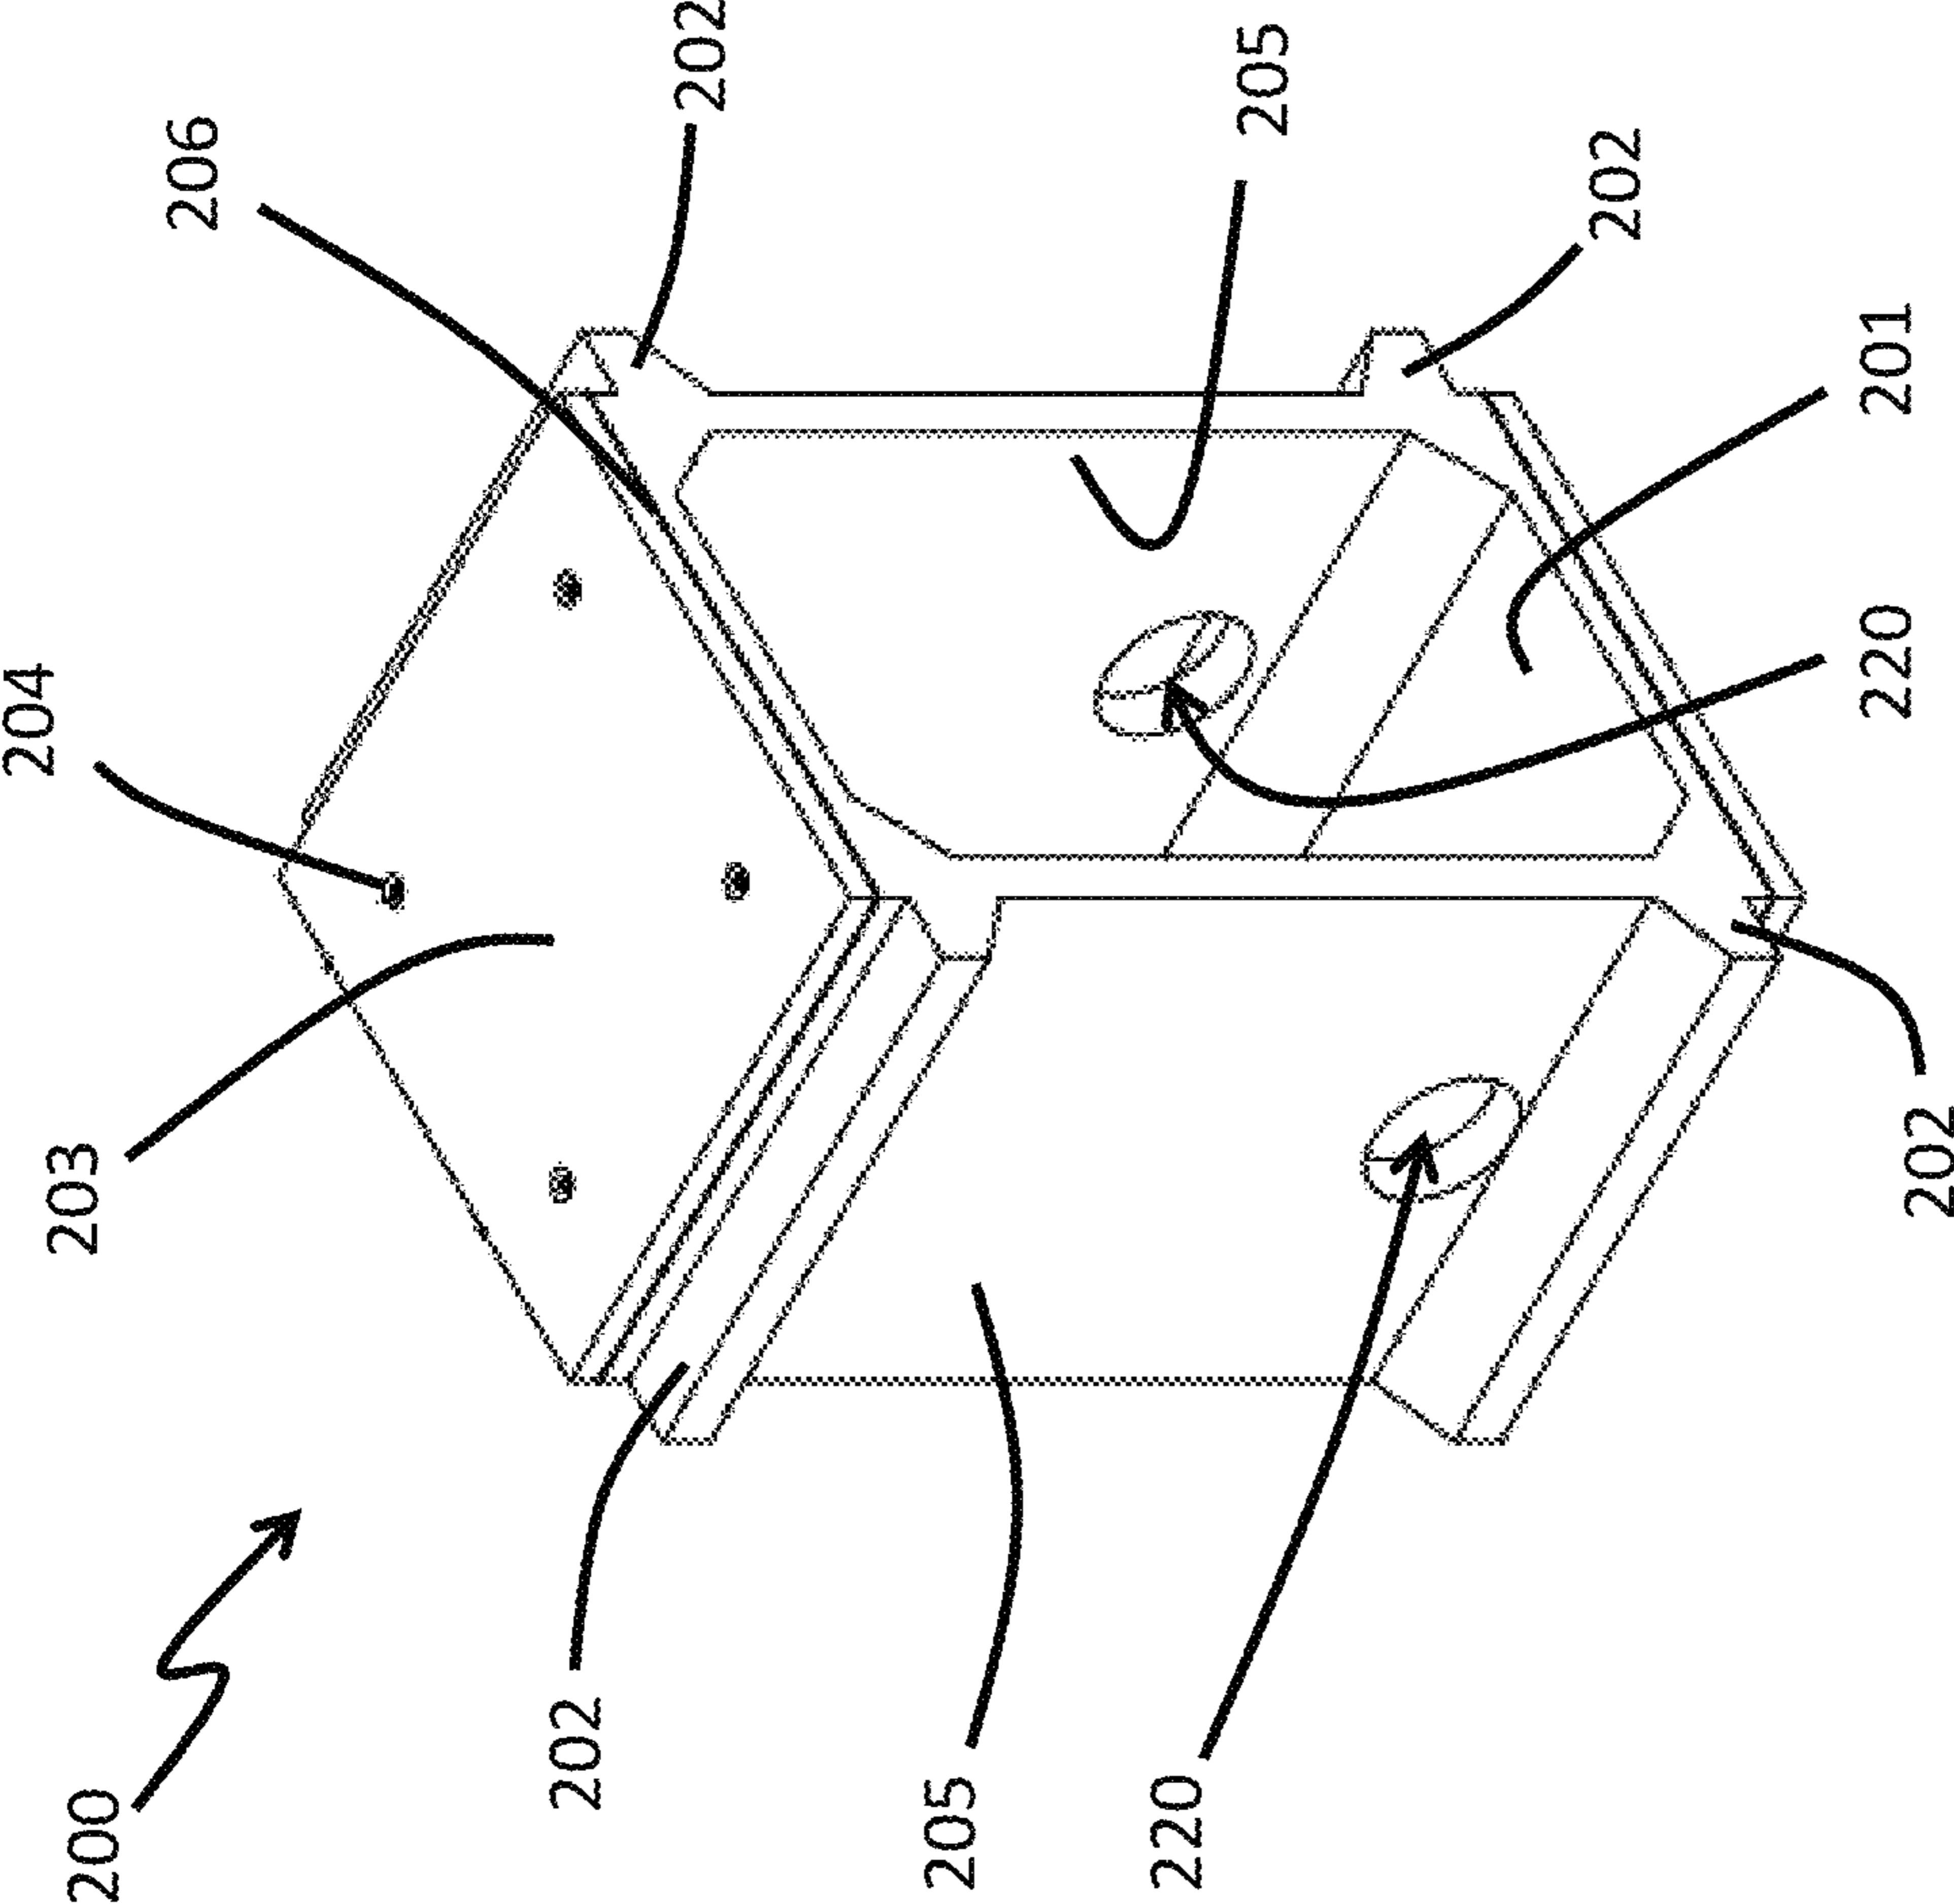


FIG. 3A

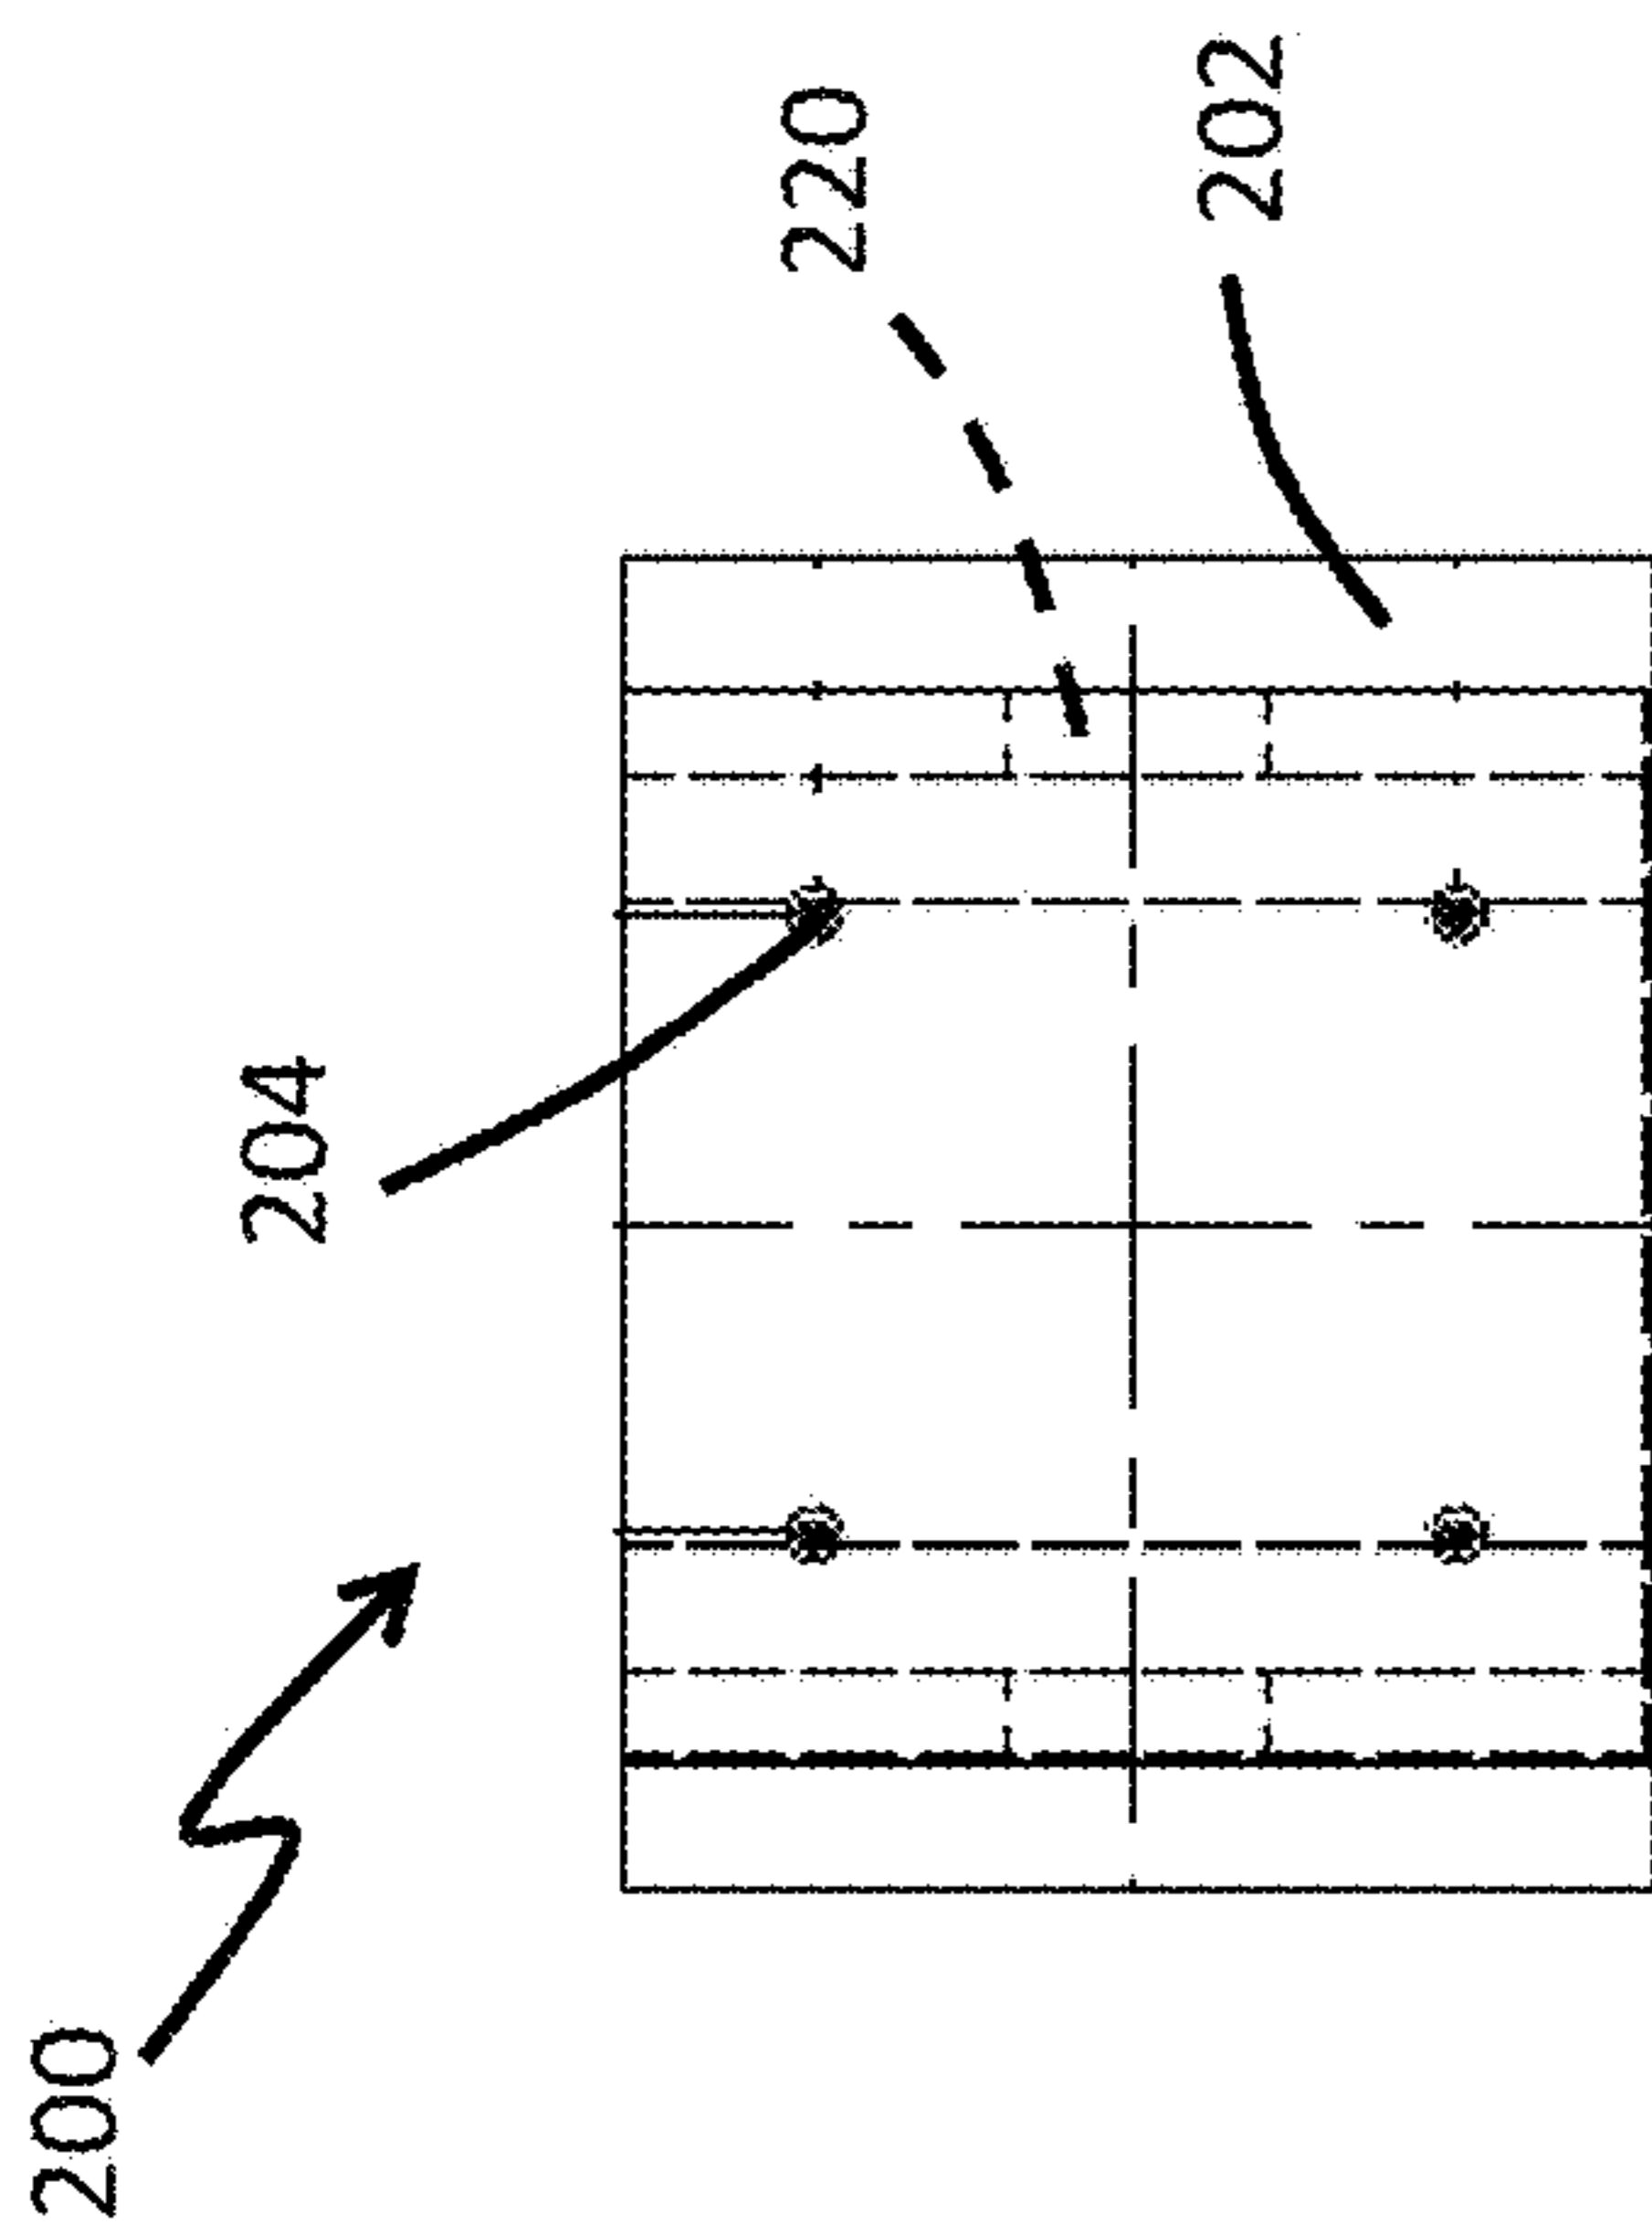


FIG. 3B

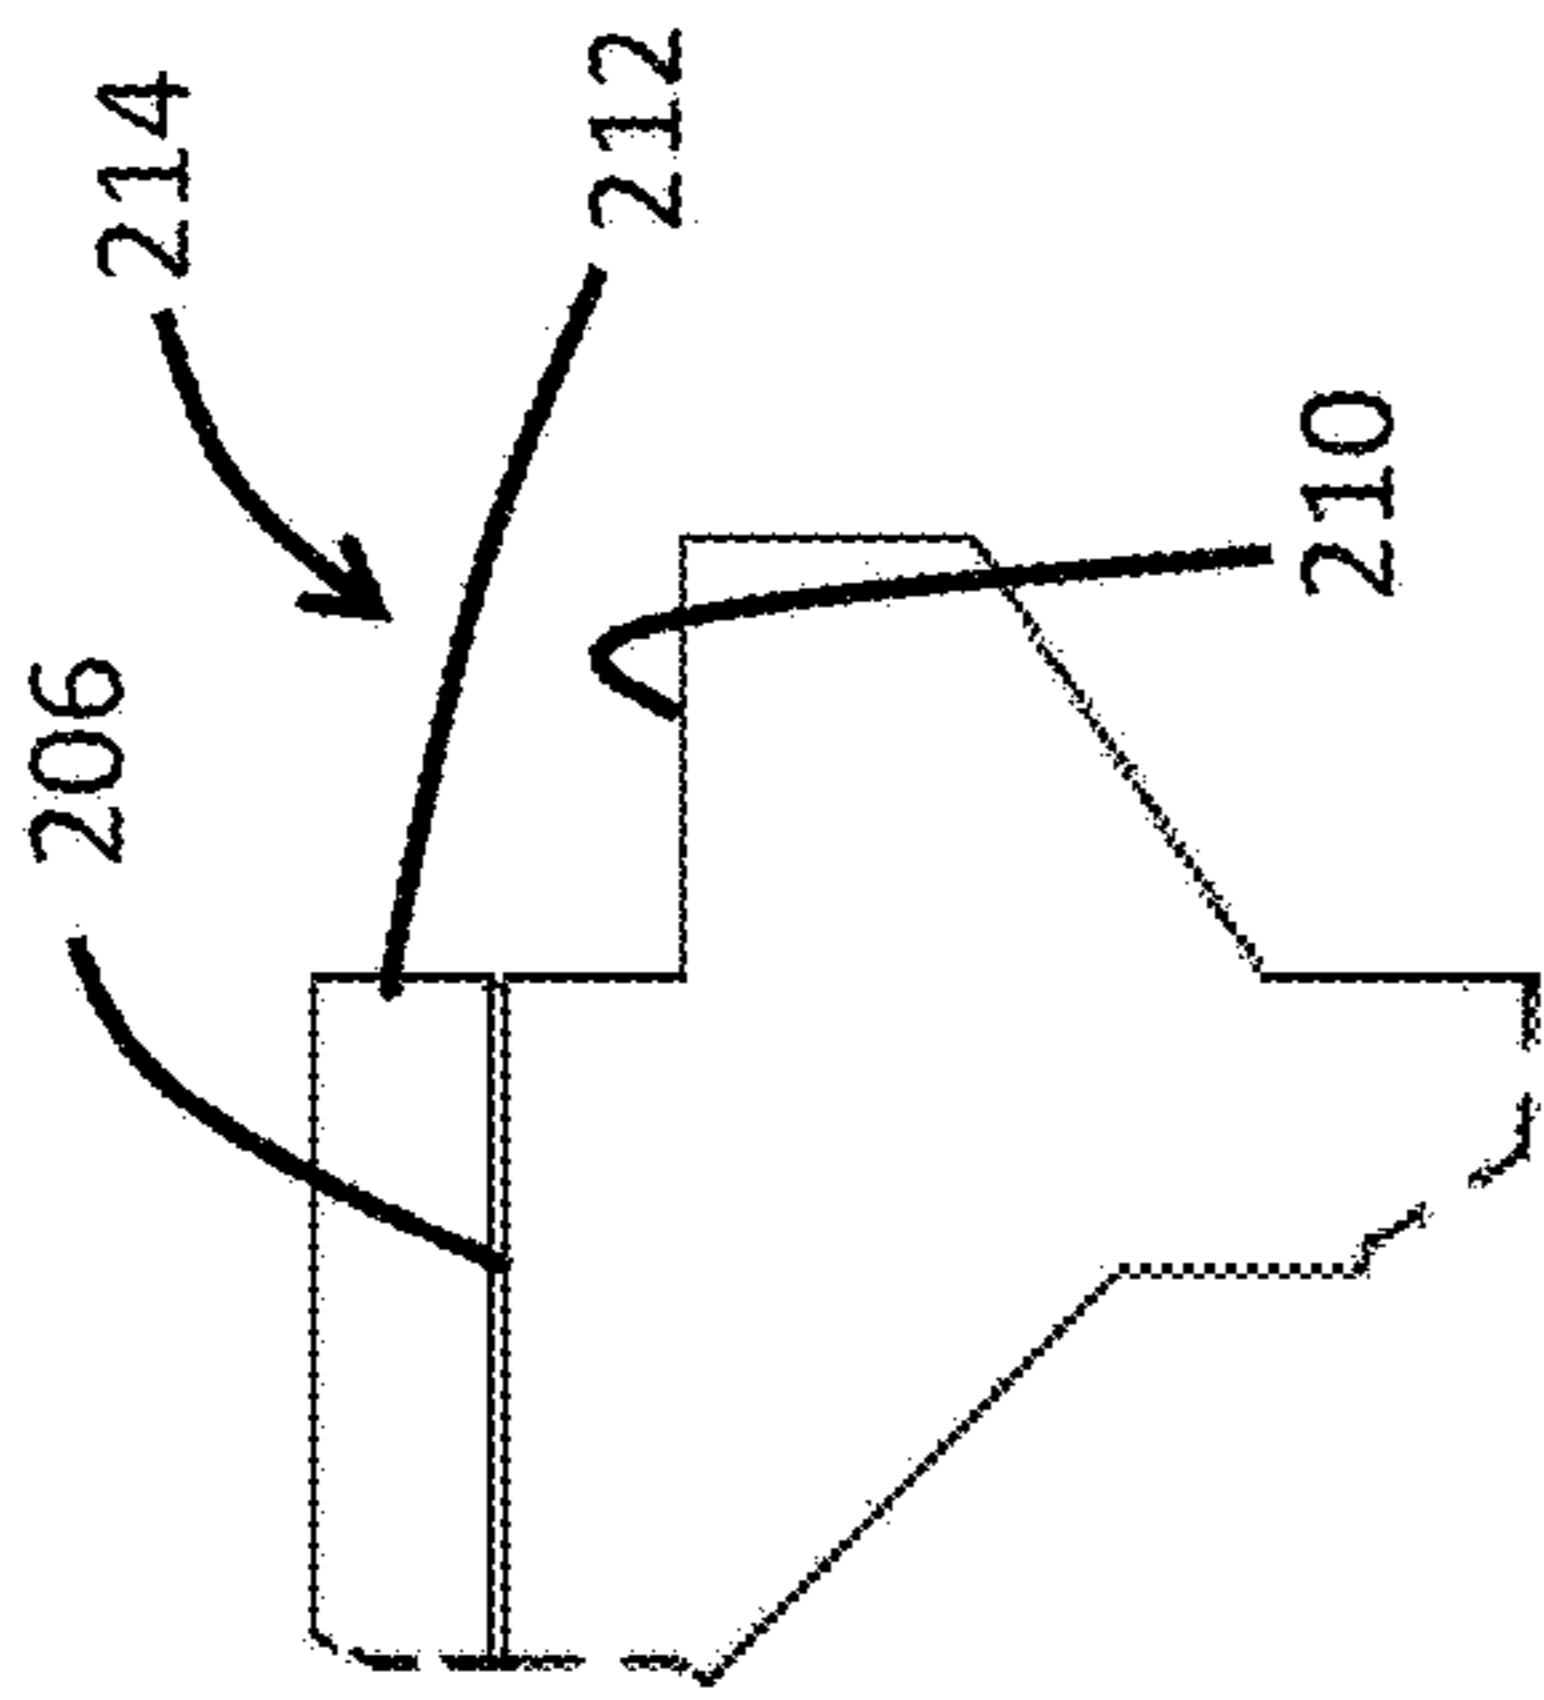


FIG. 3E

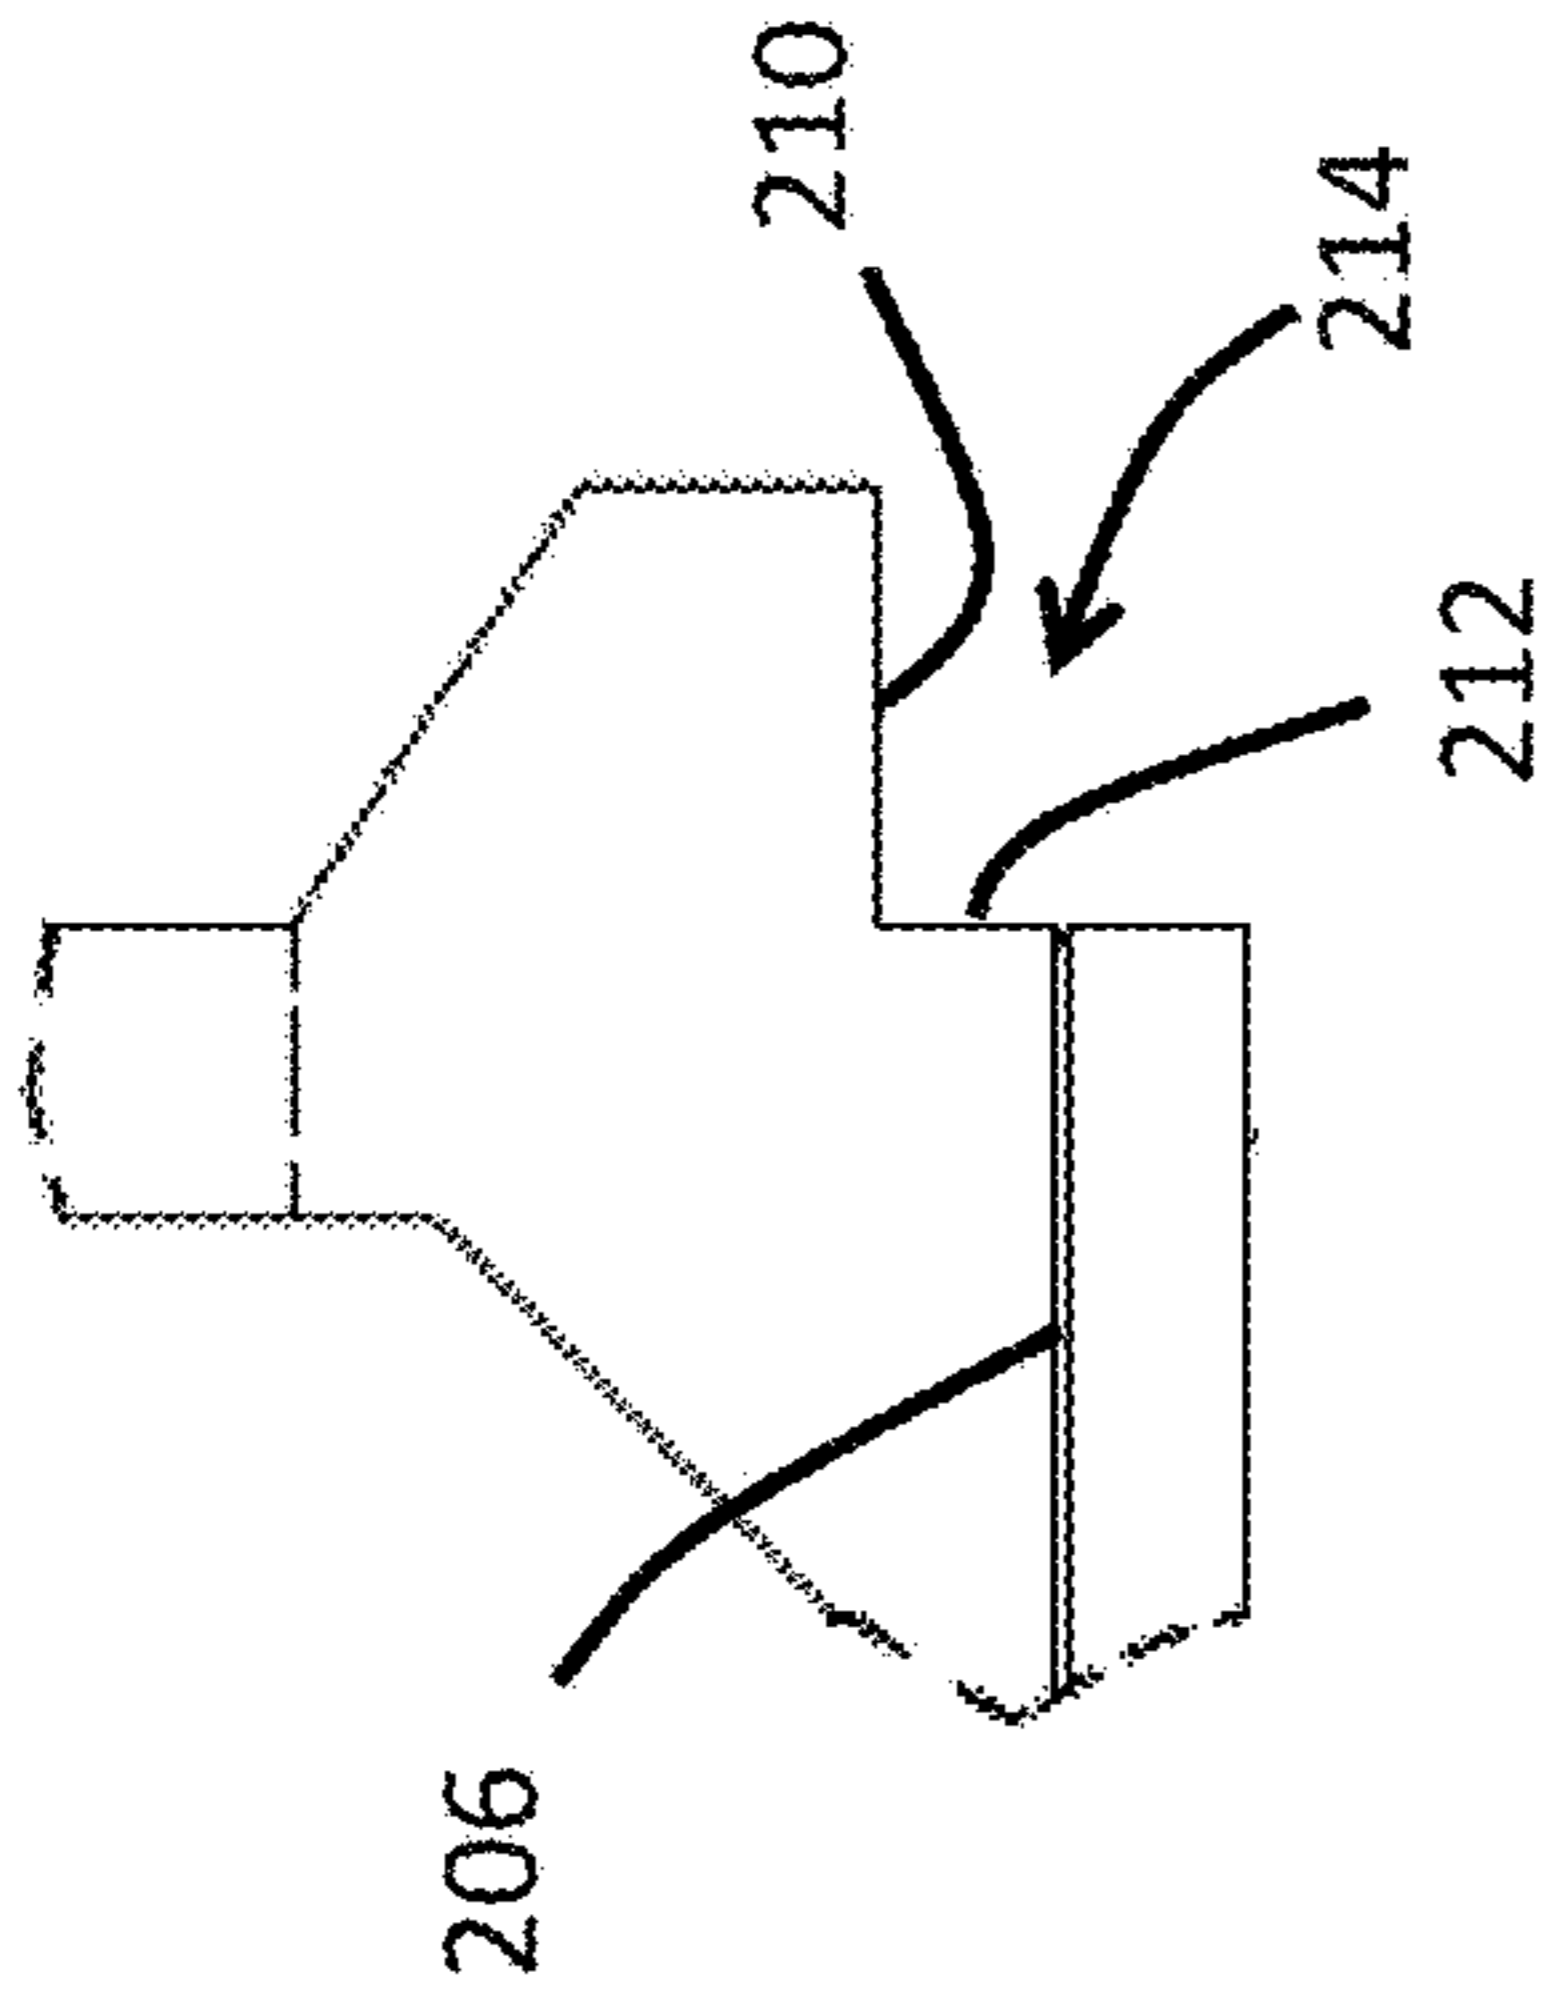


FIG. 3F

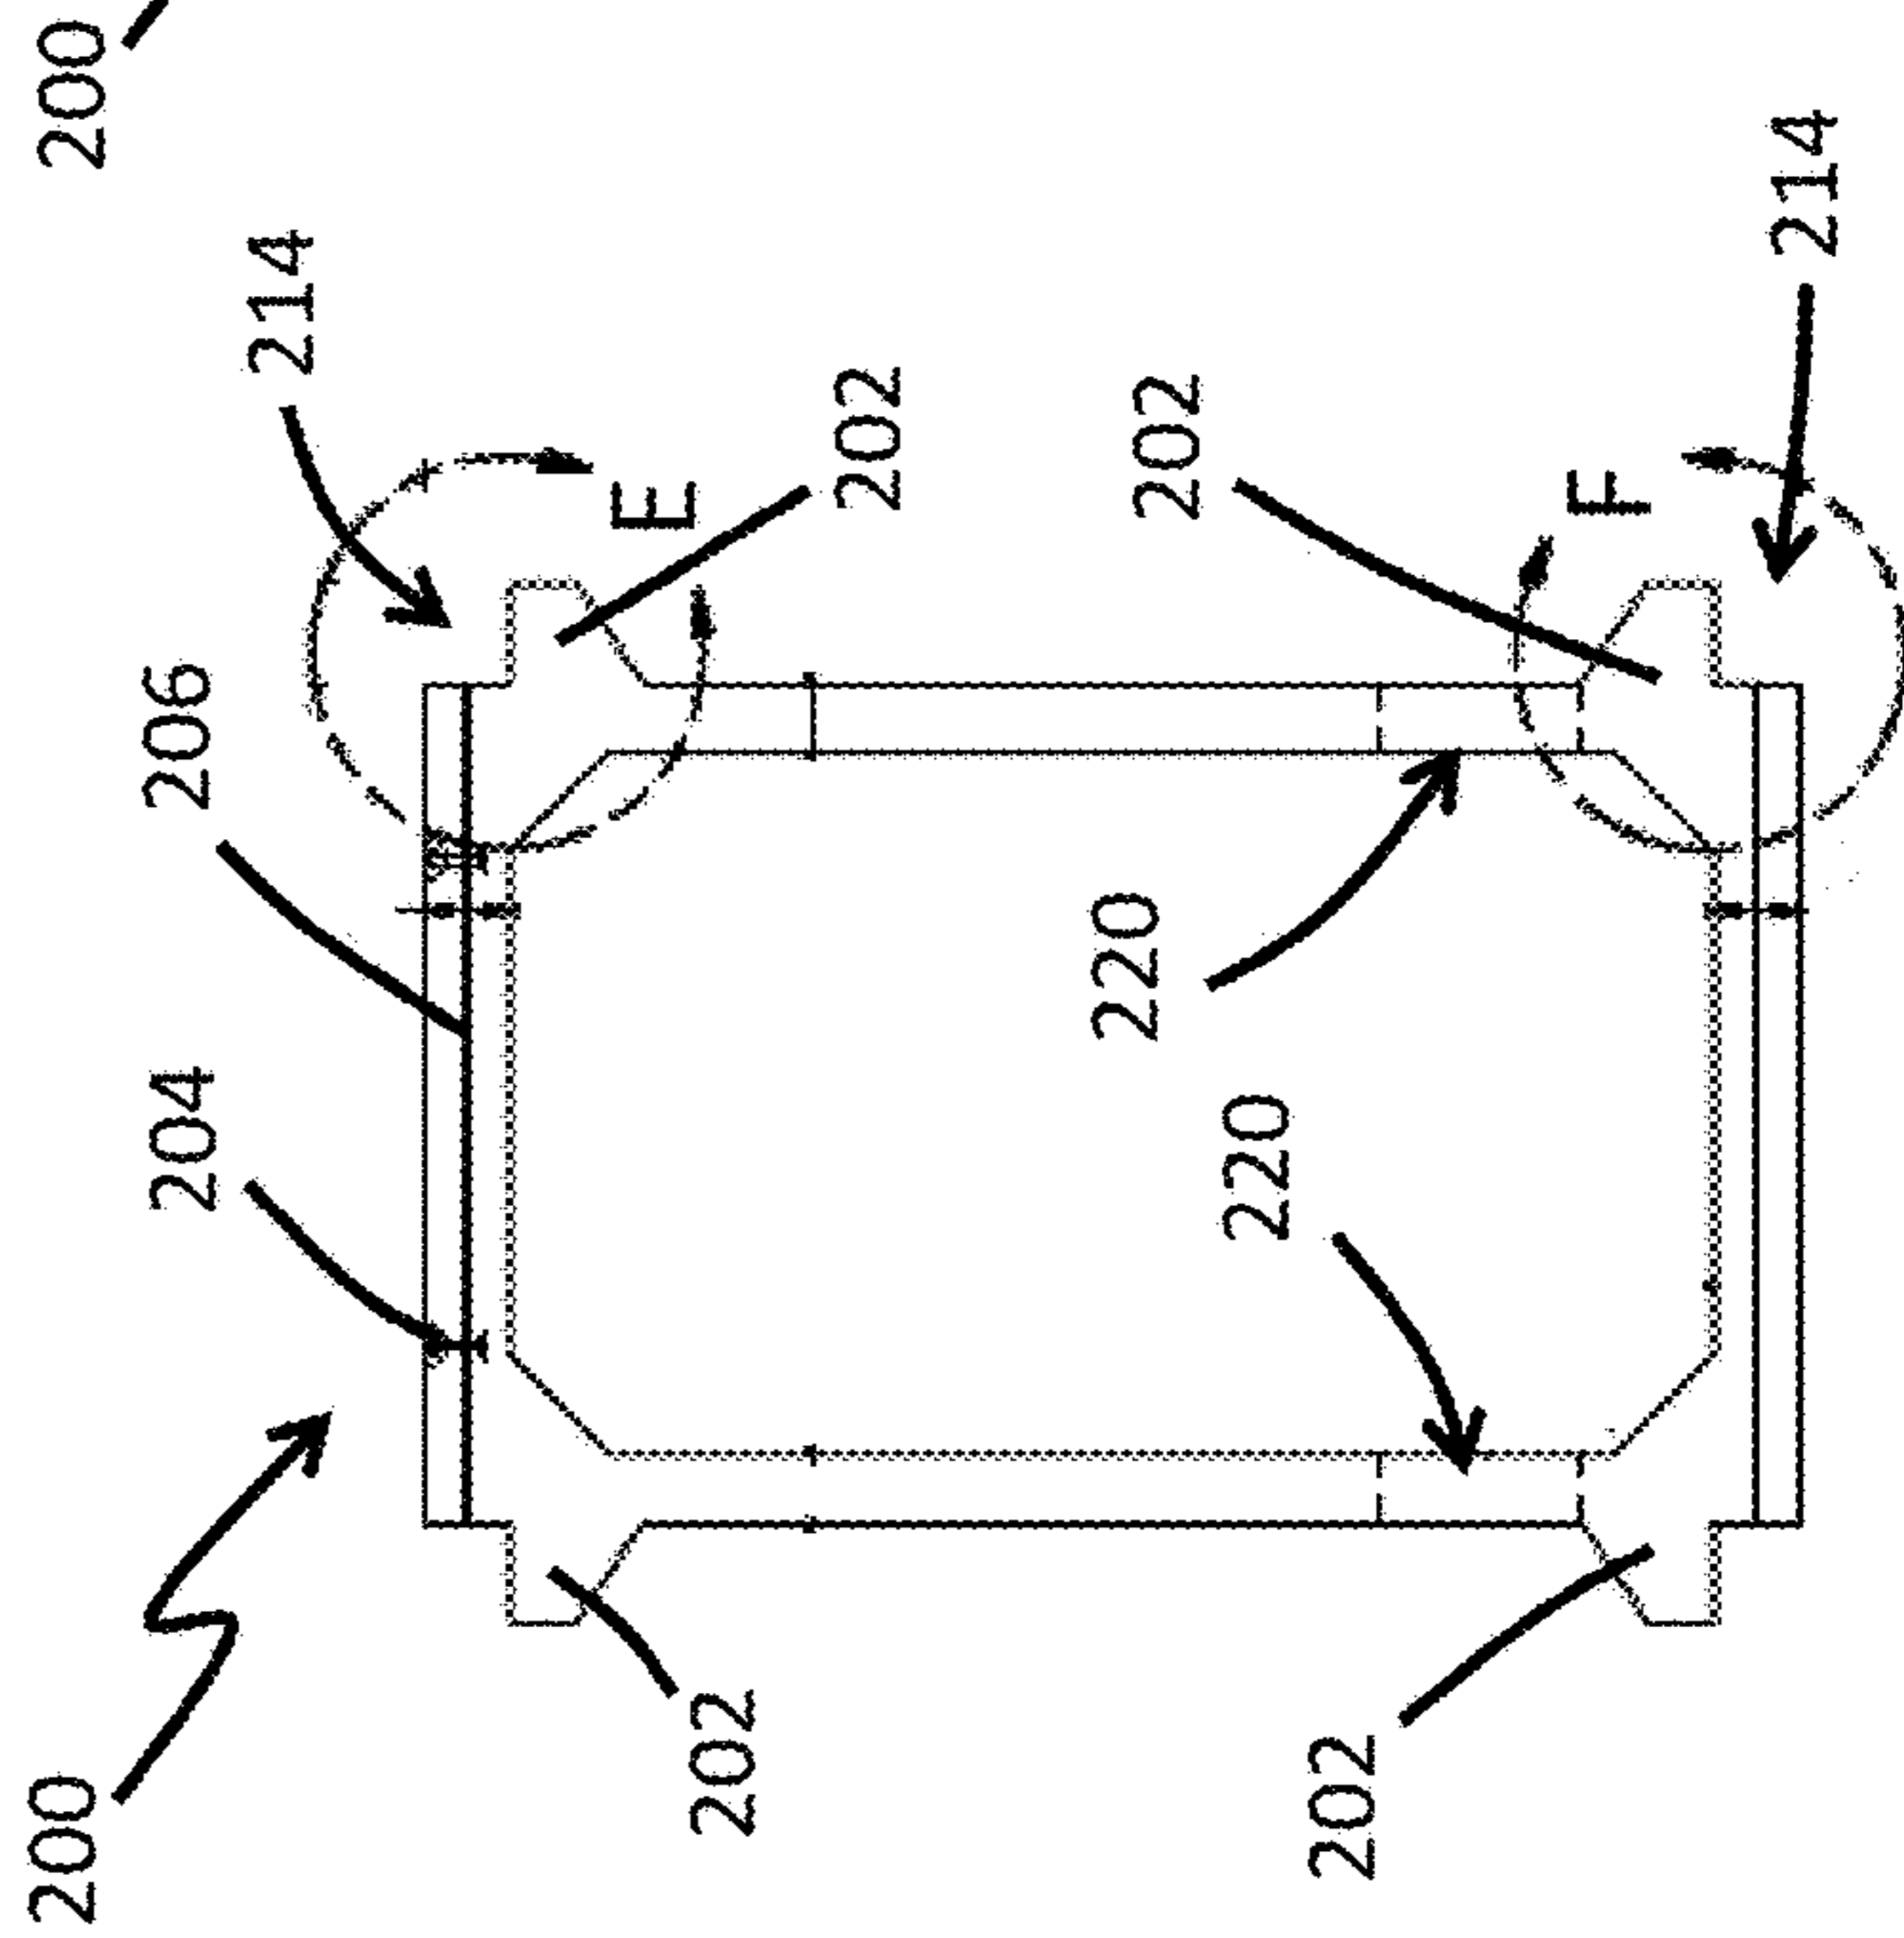


FIG. 3C

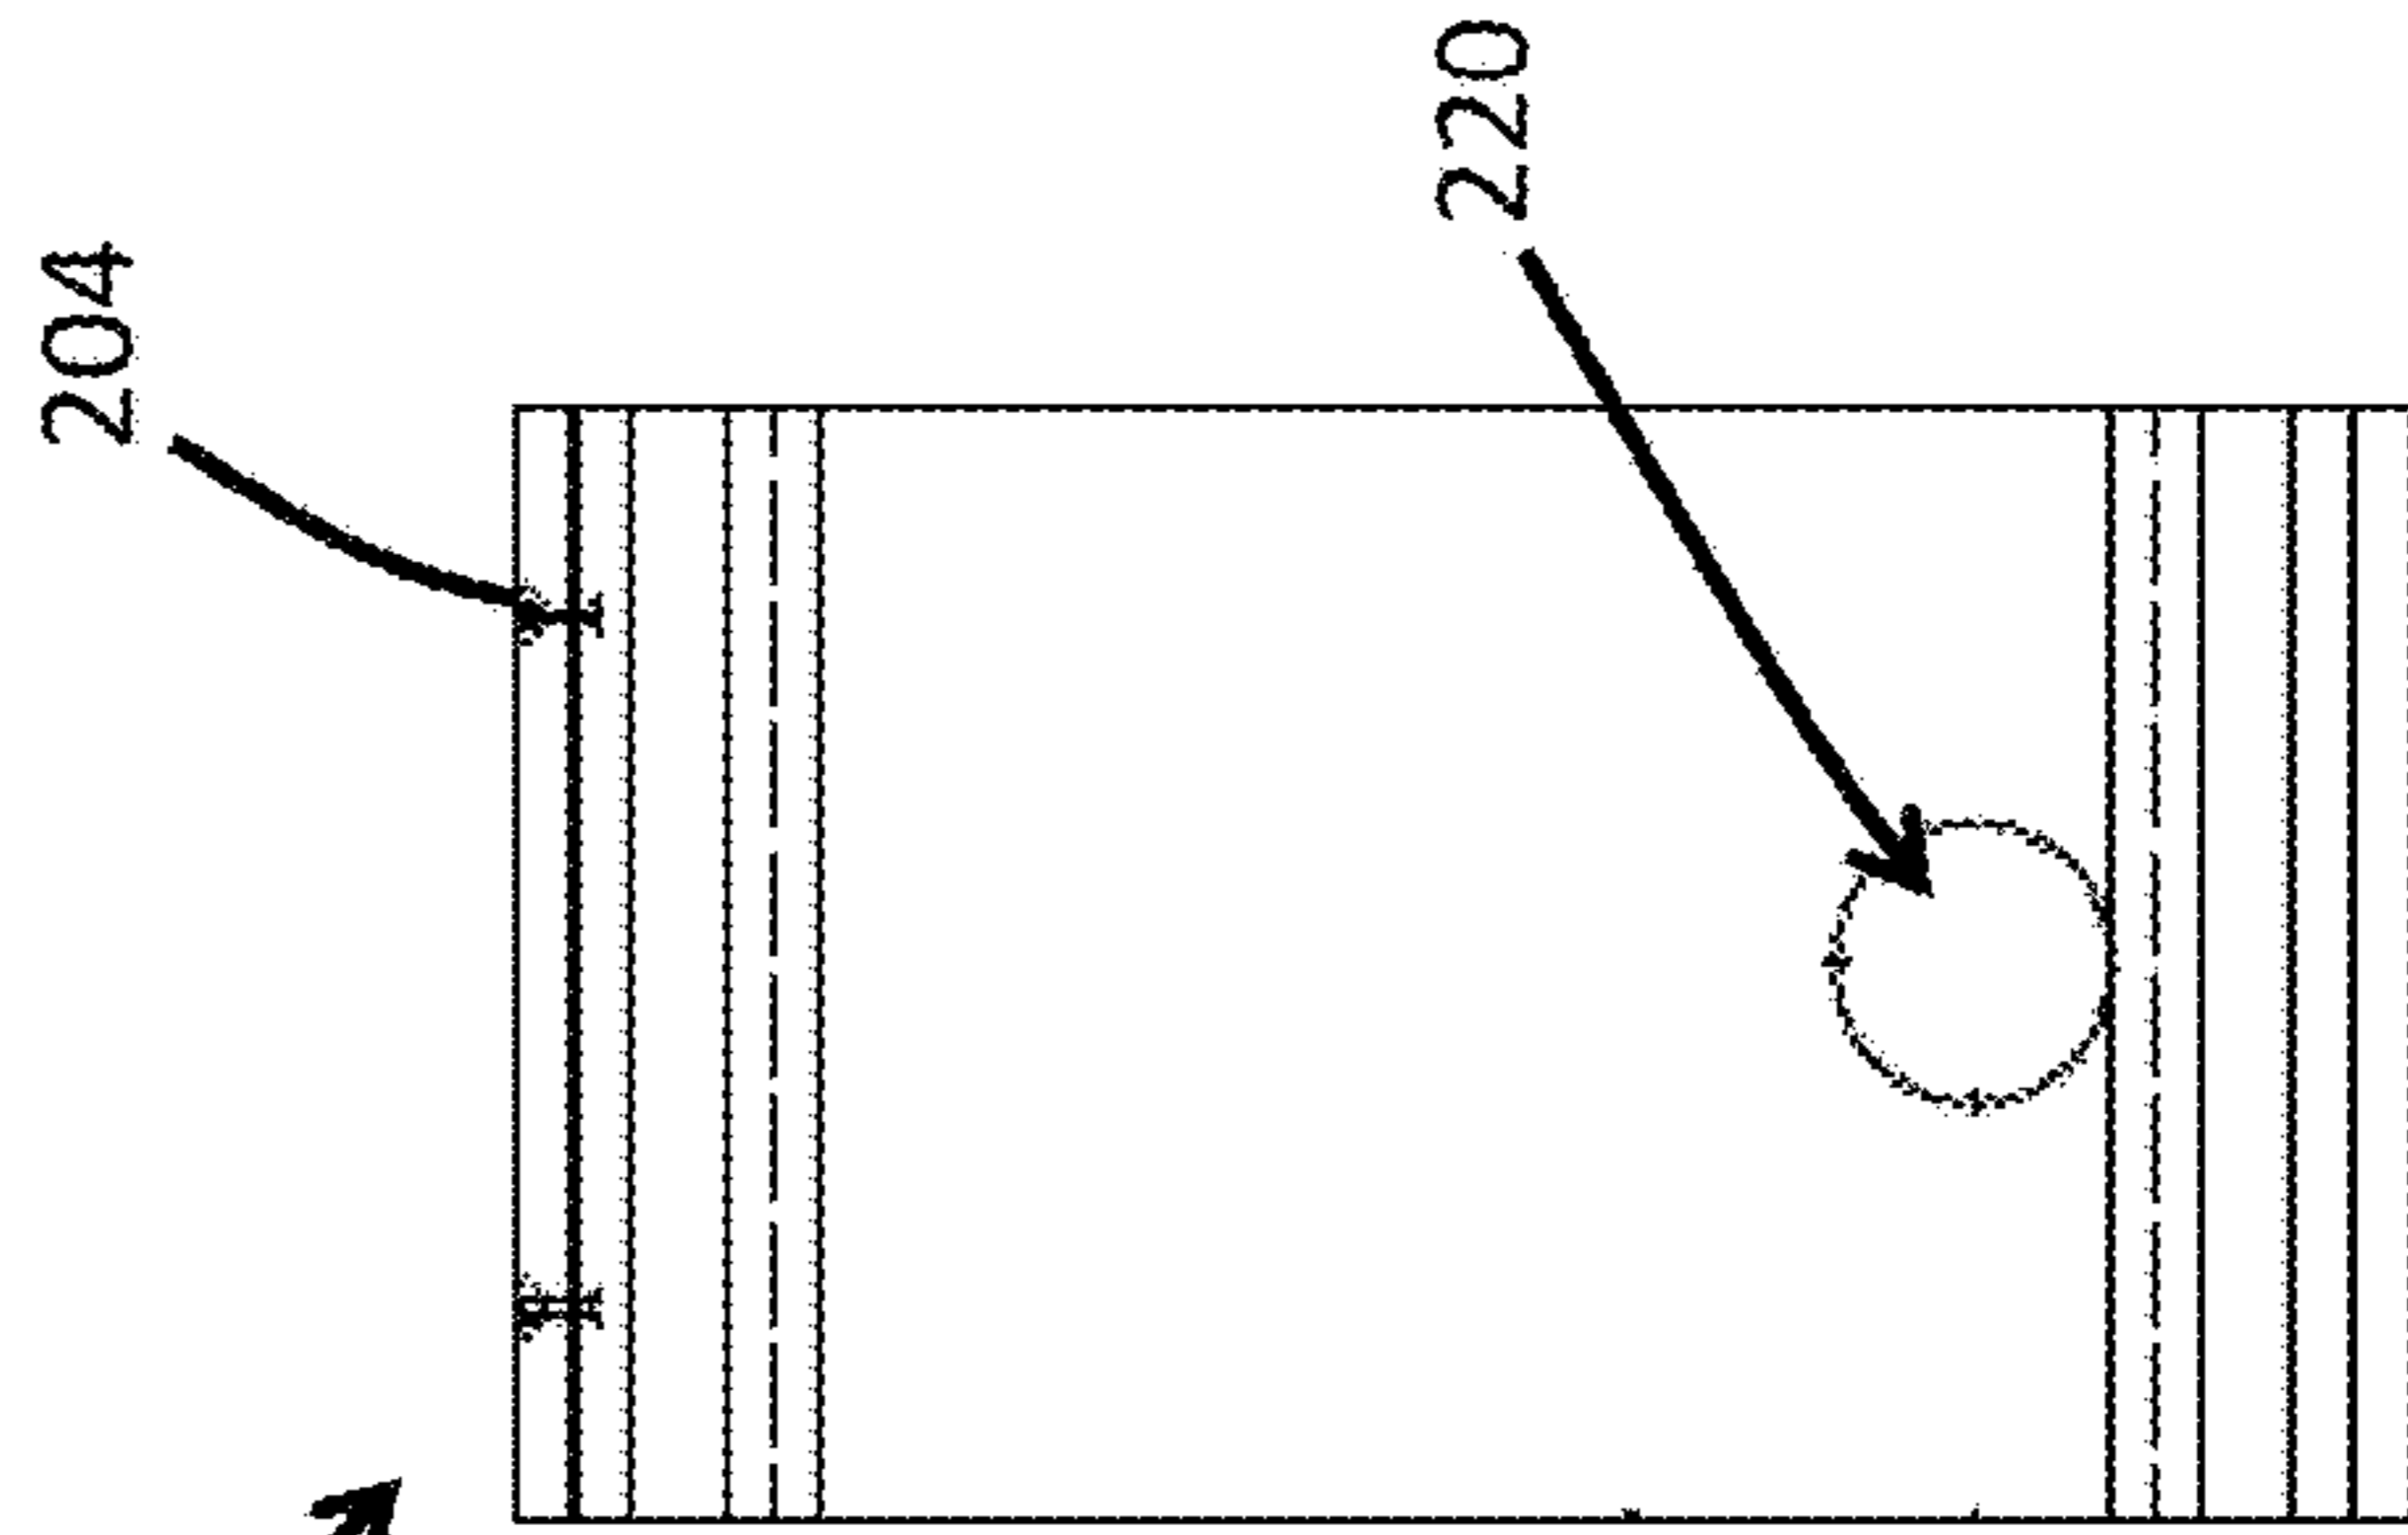


FIG. 3D

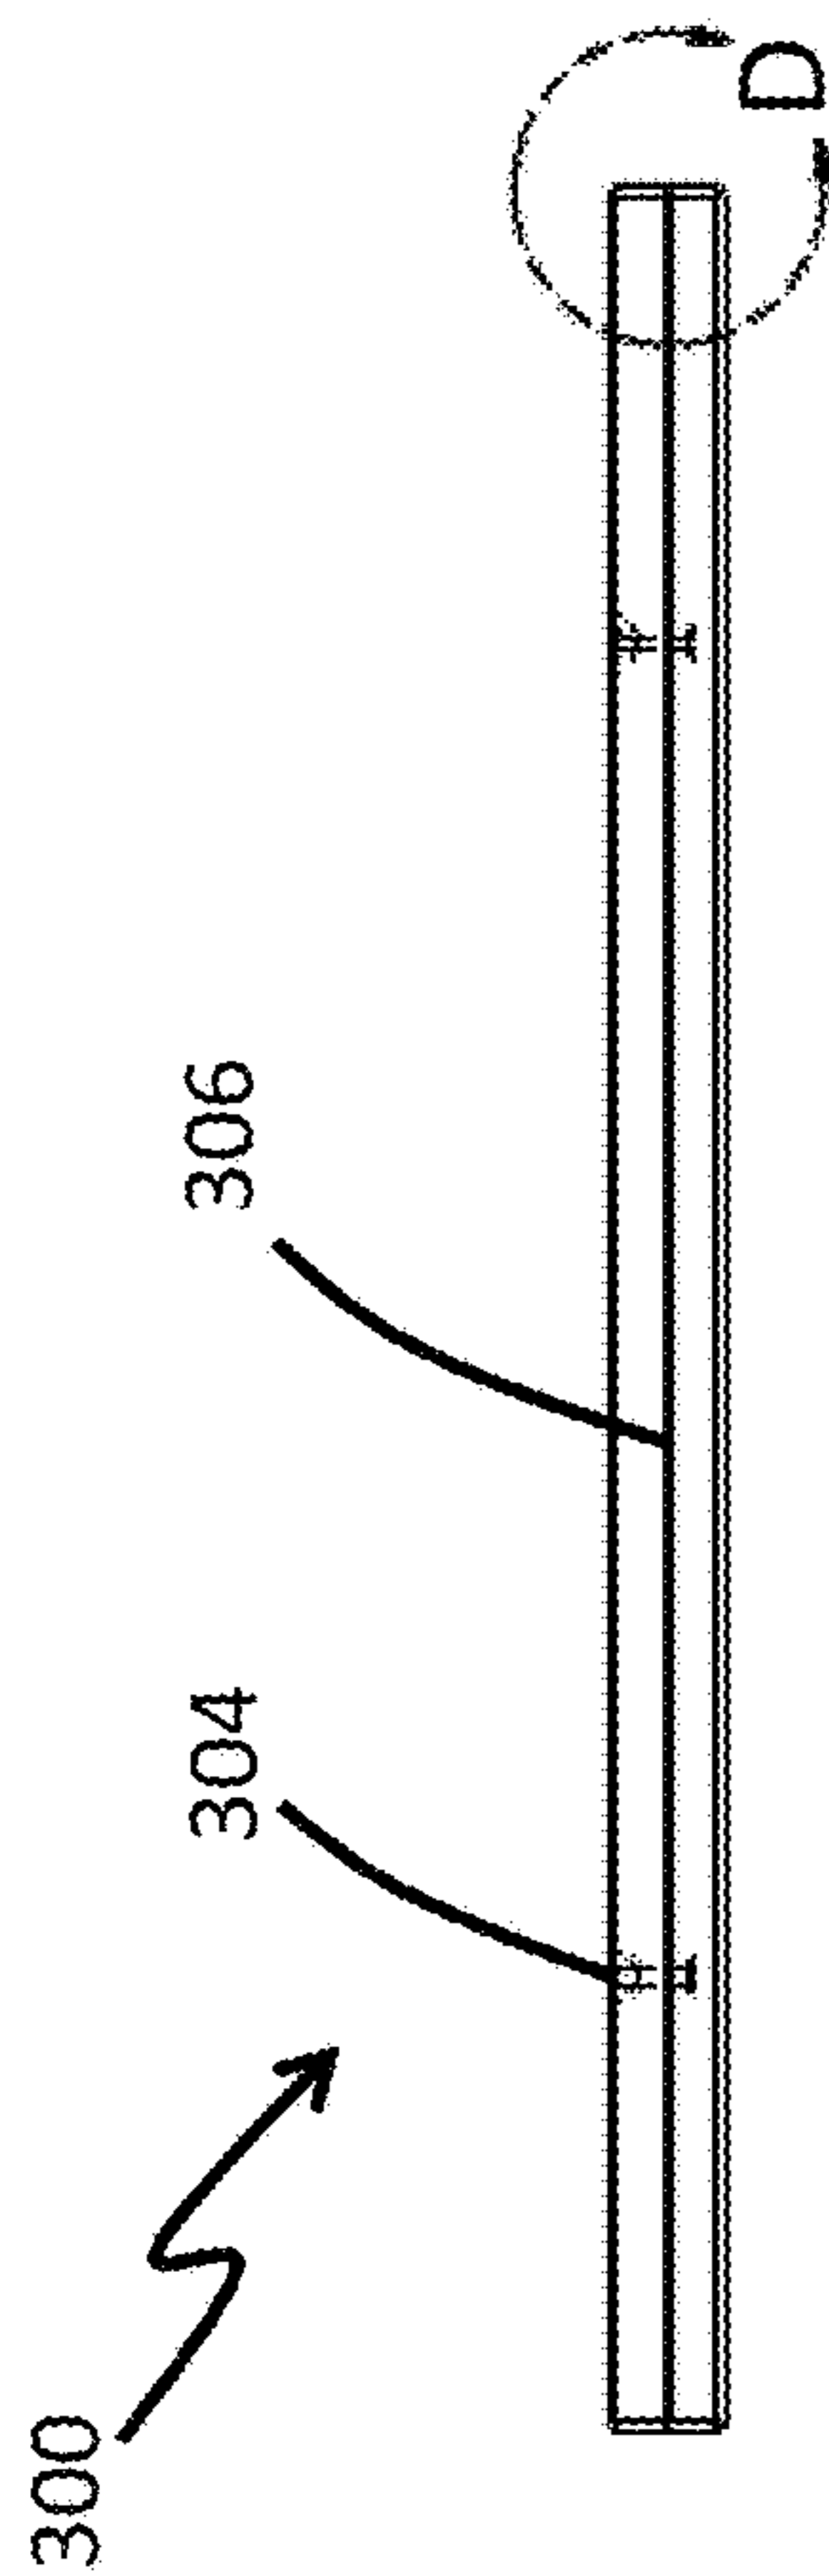


FIG. 4C

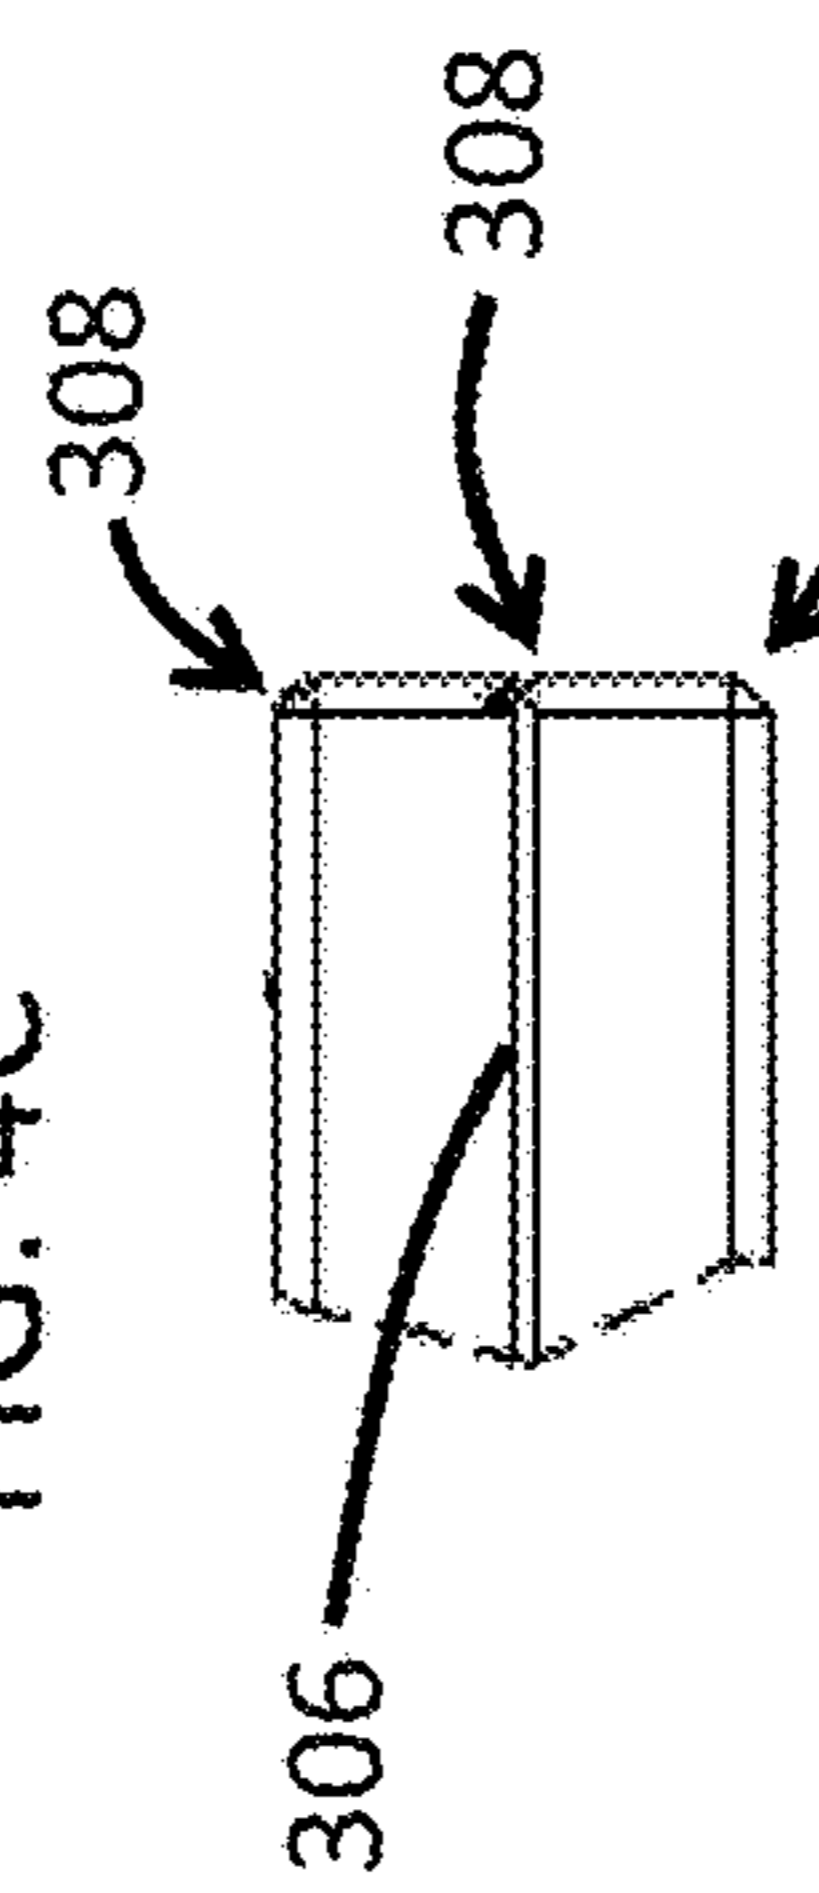


FIG. 4D

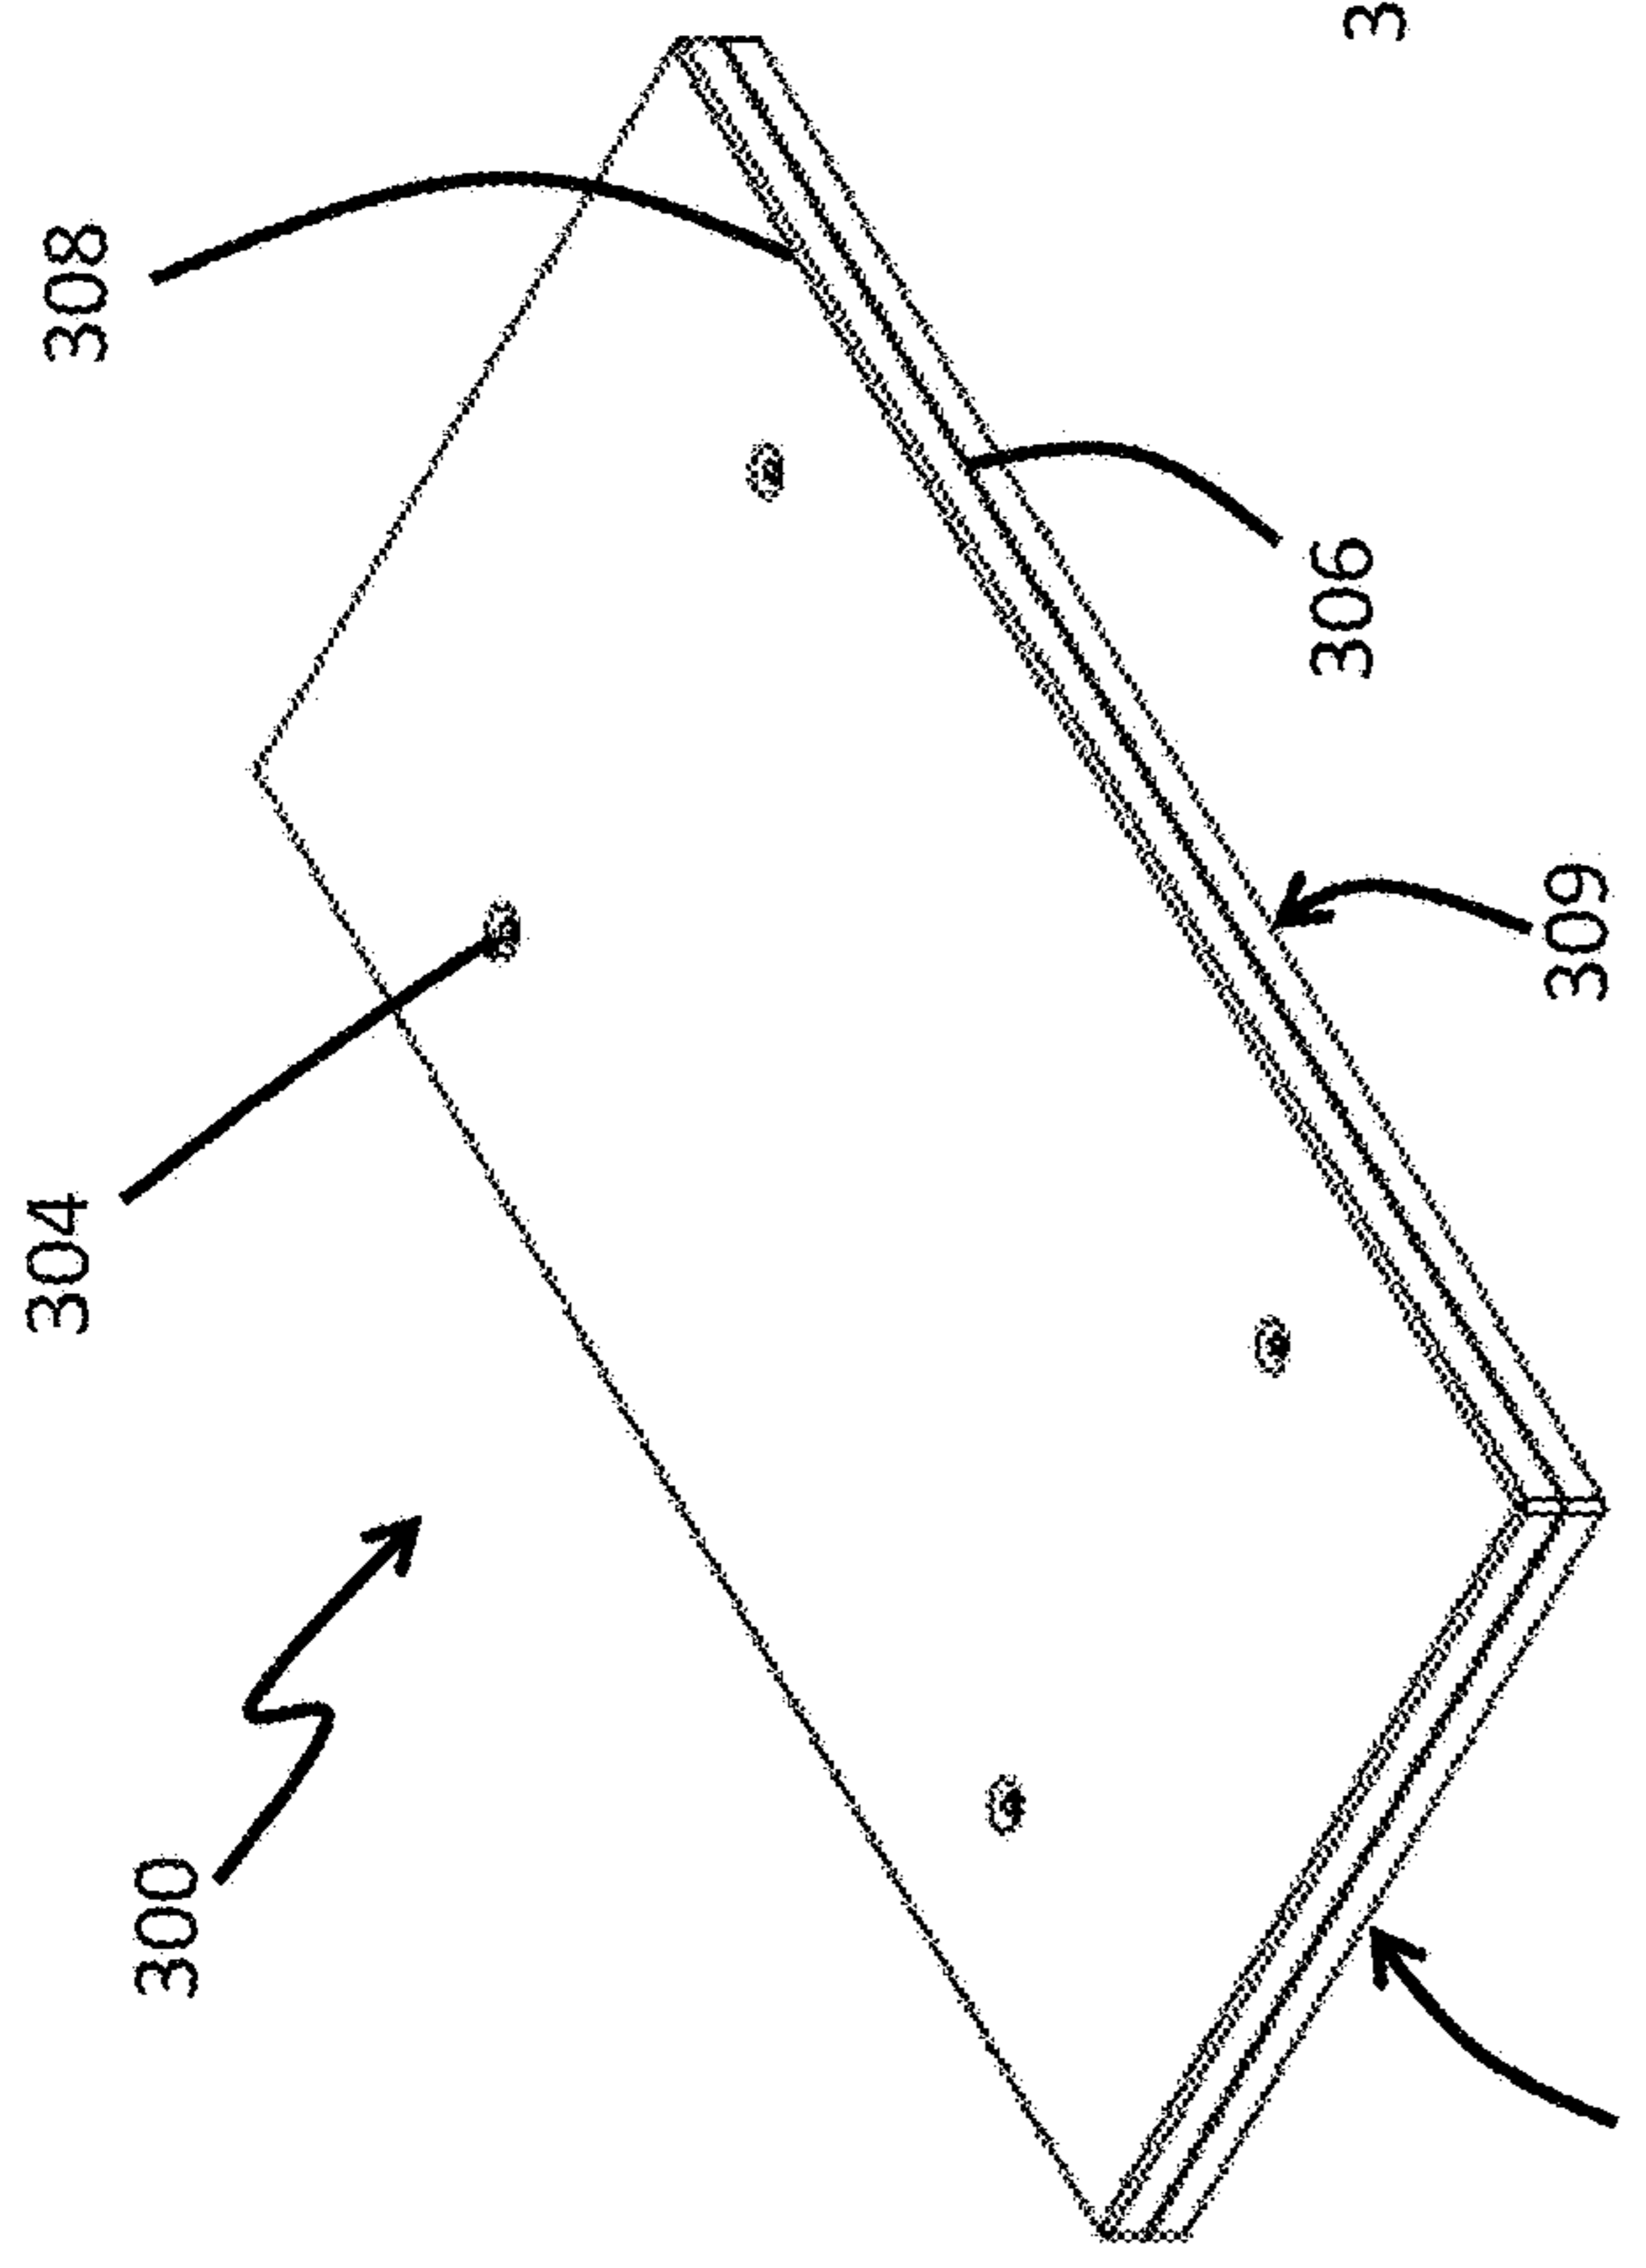


FIG. 4A

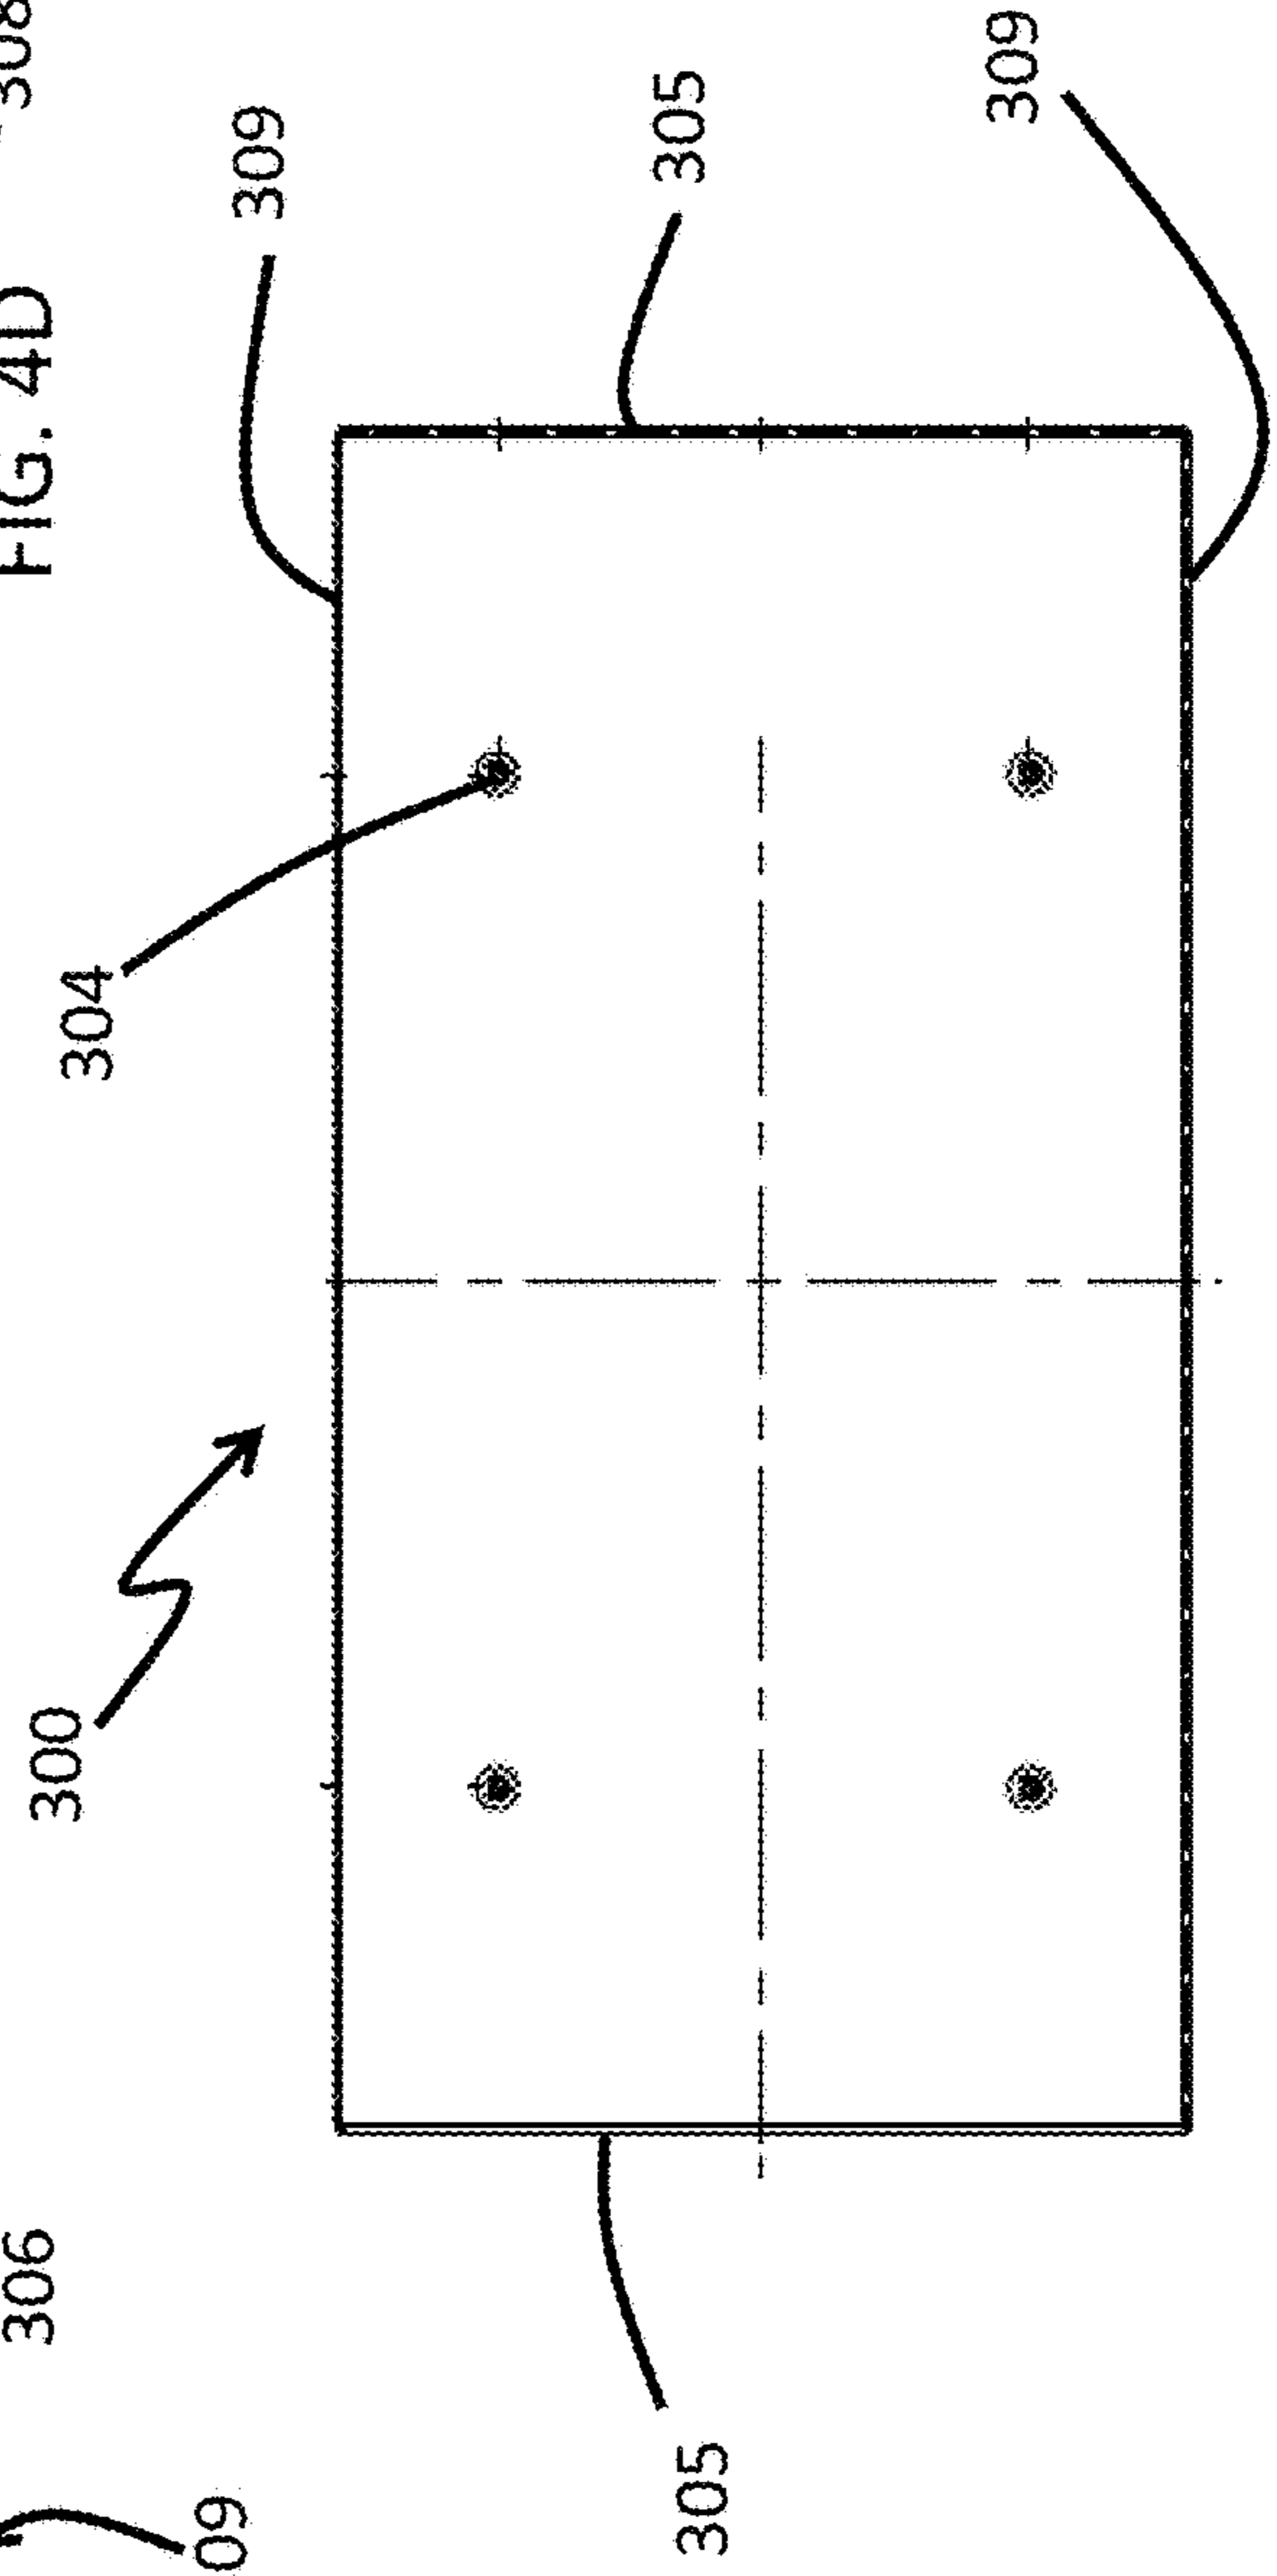


FIG. 4B

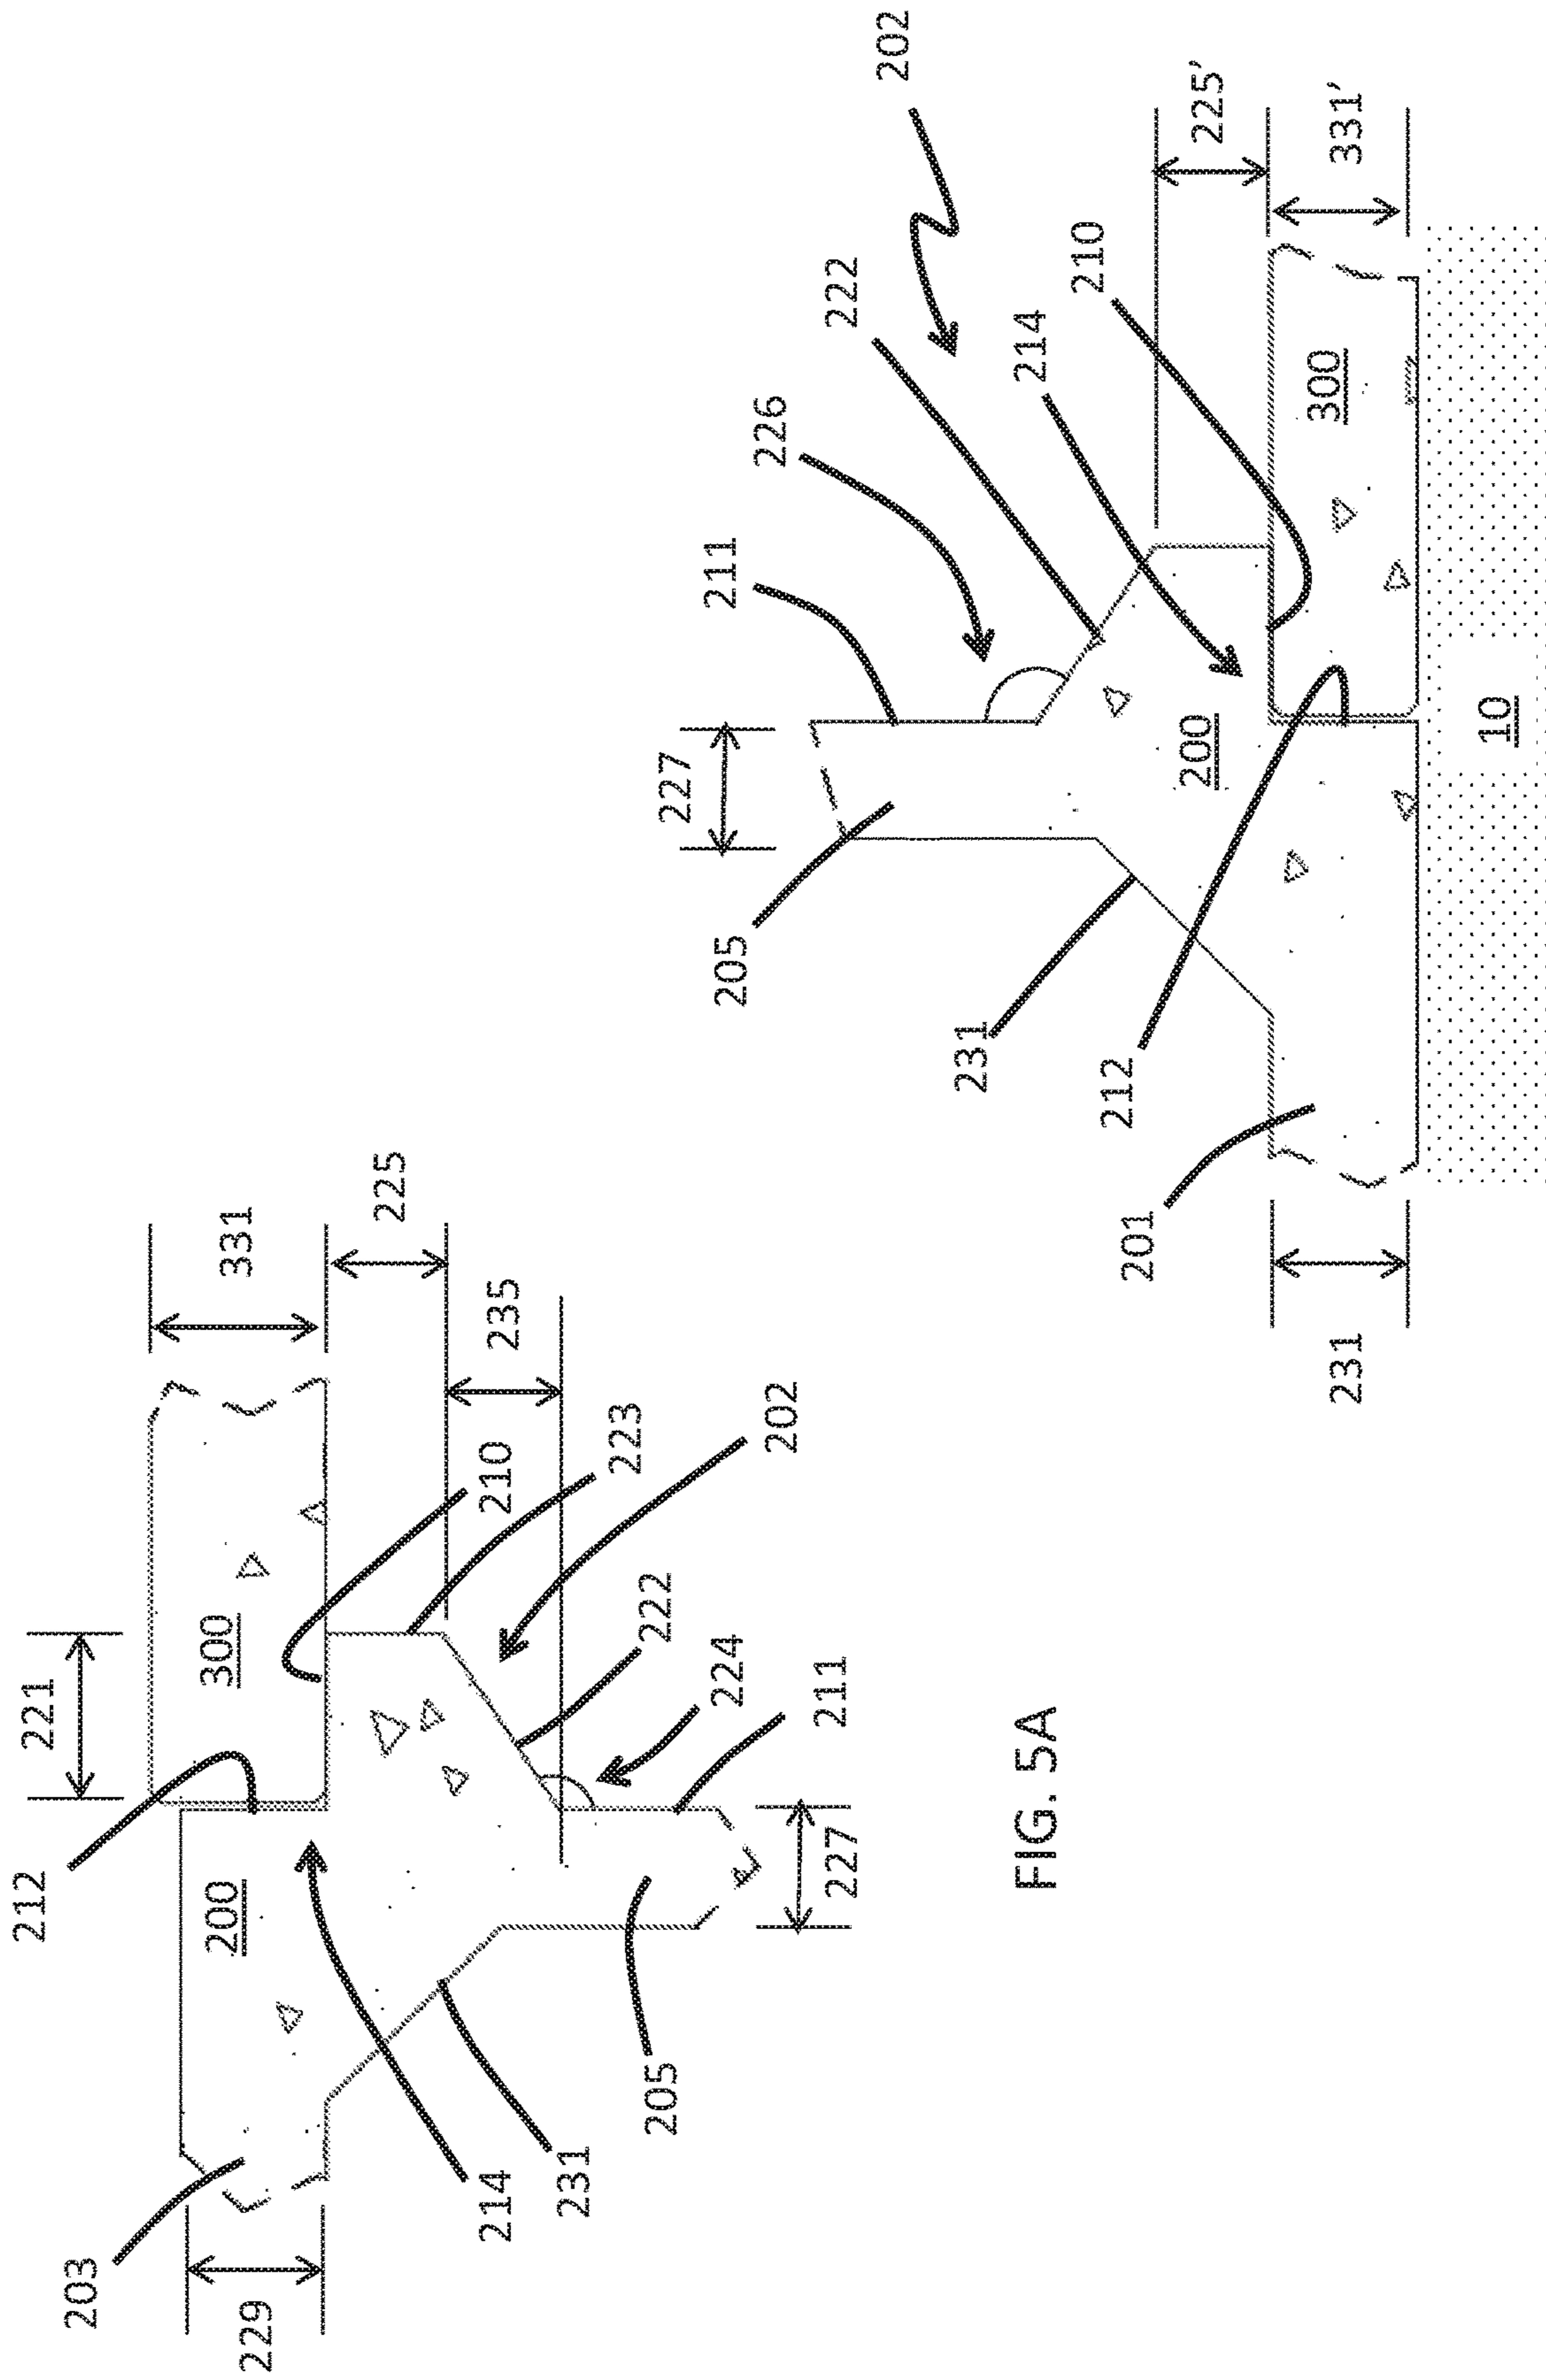
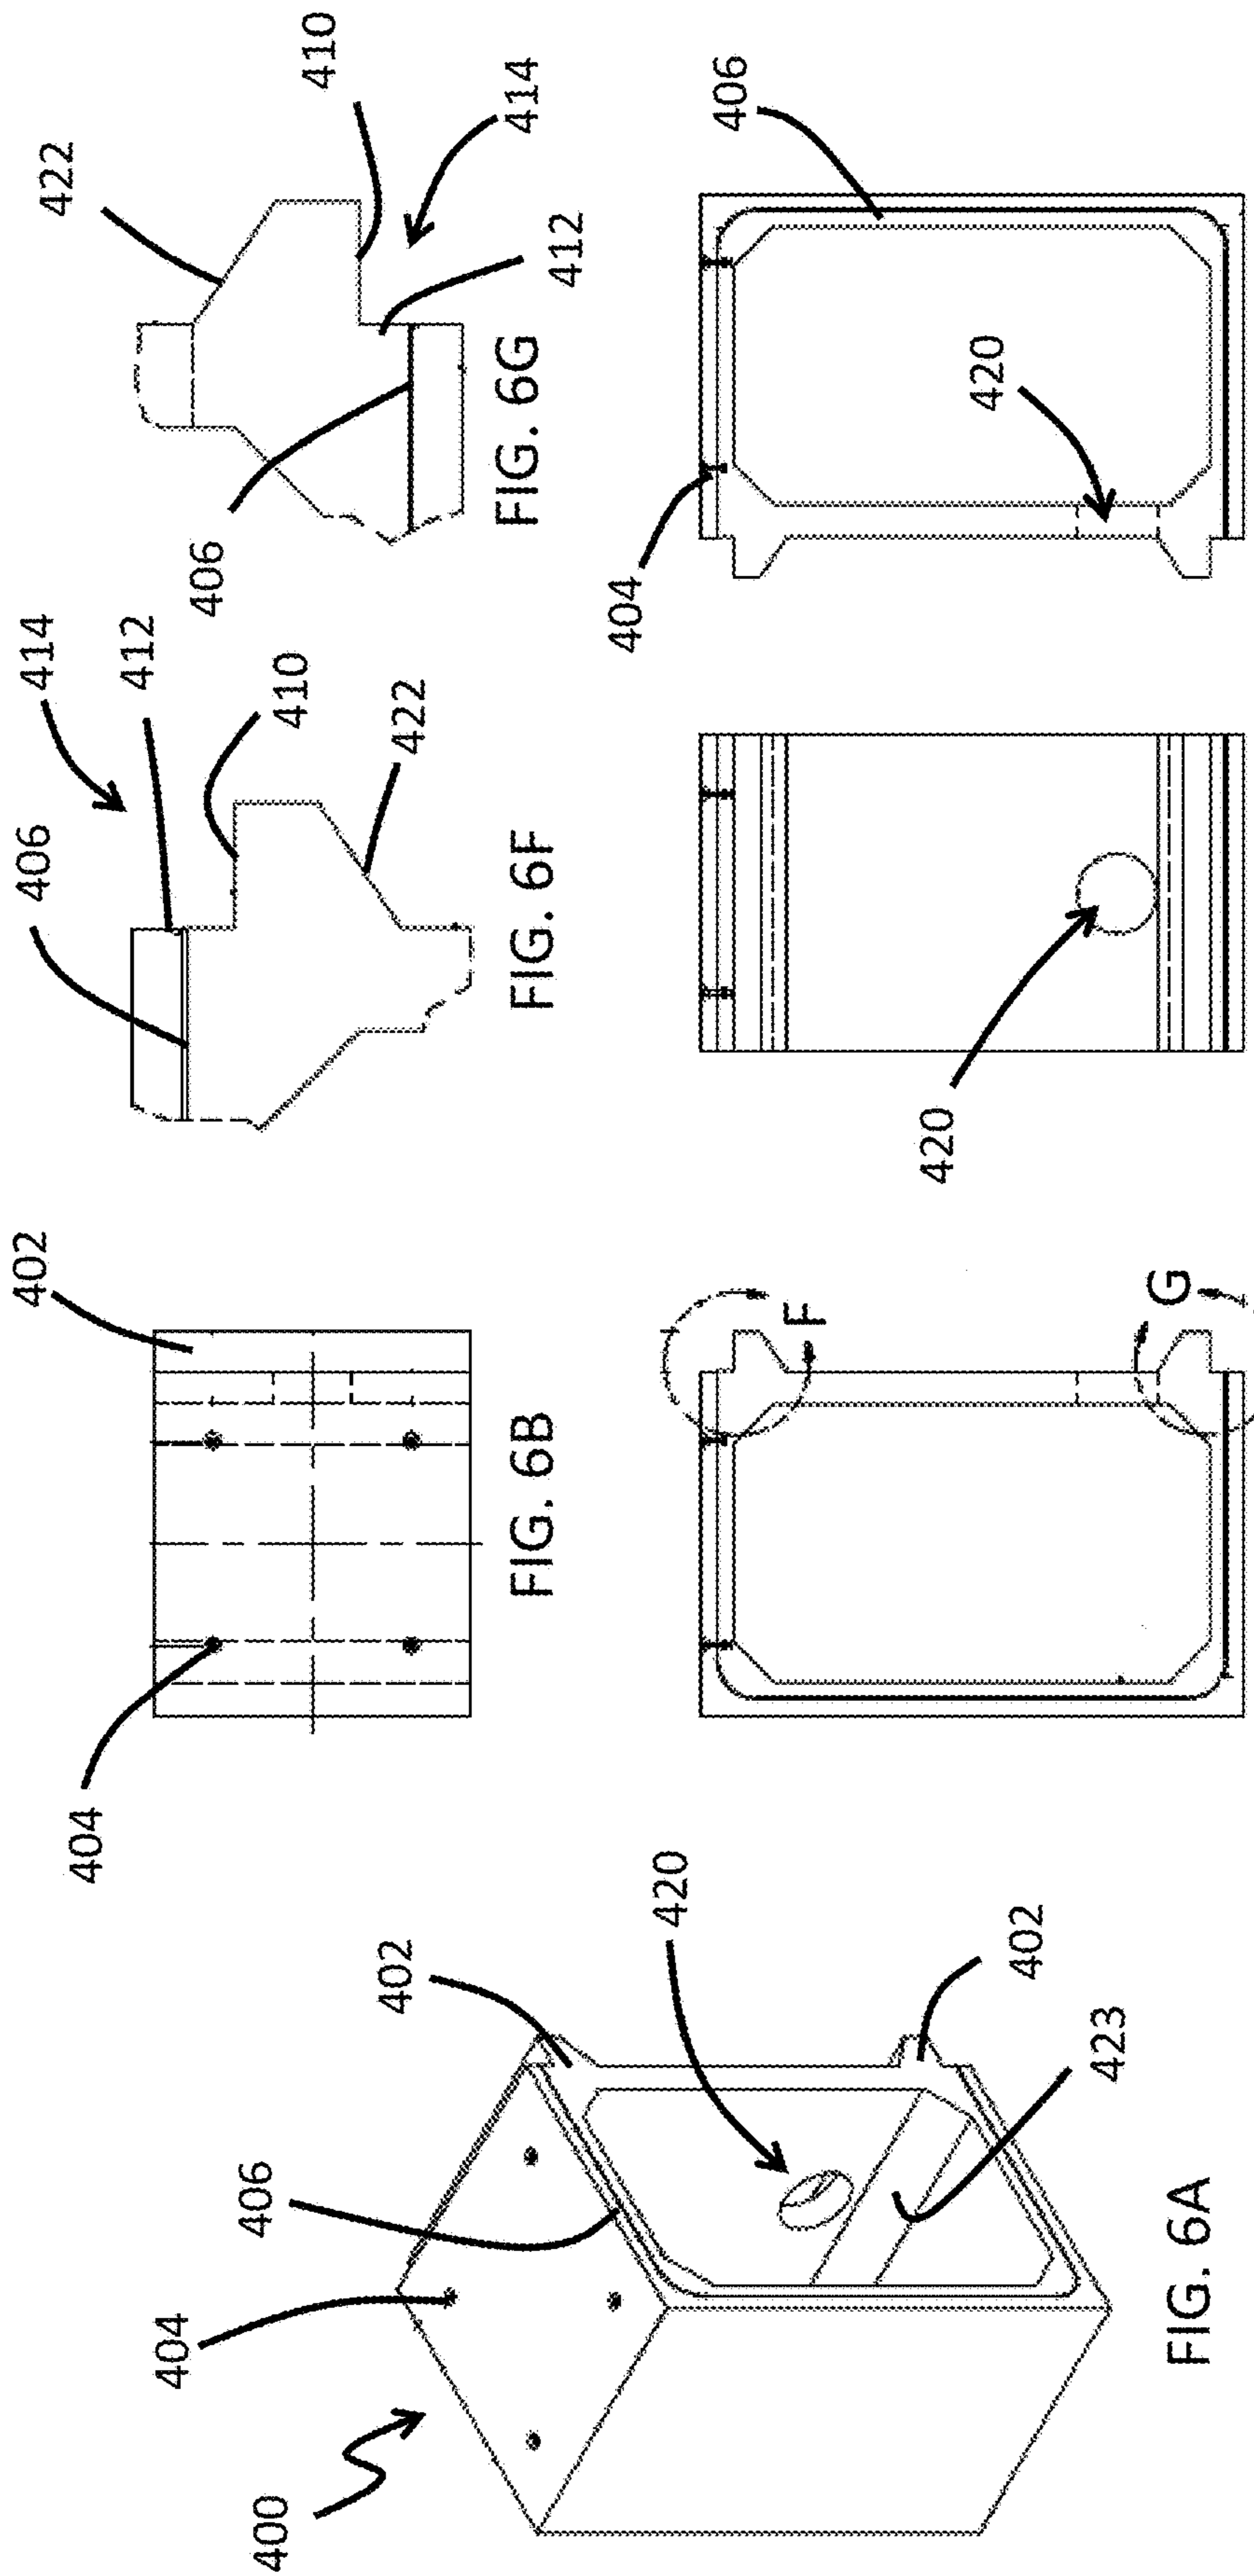
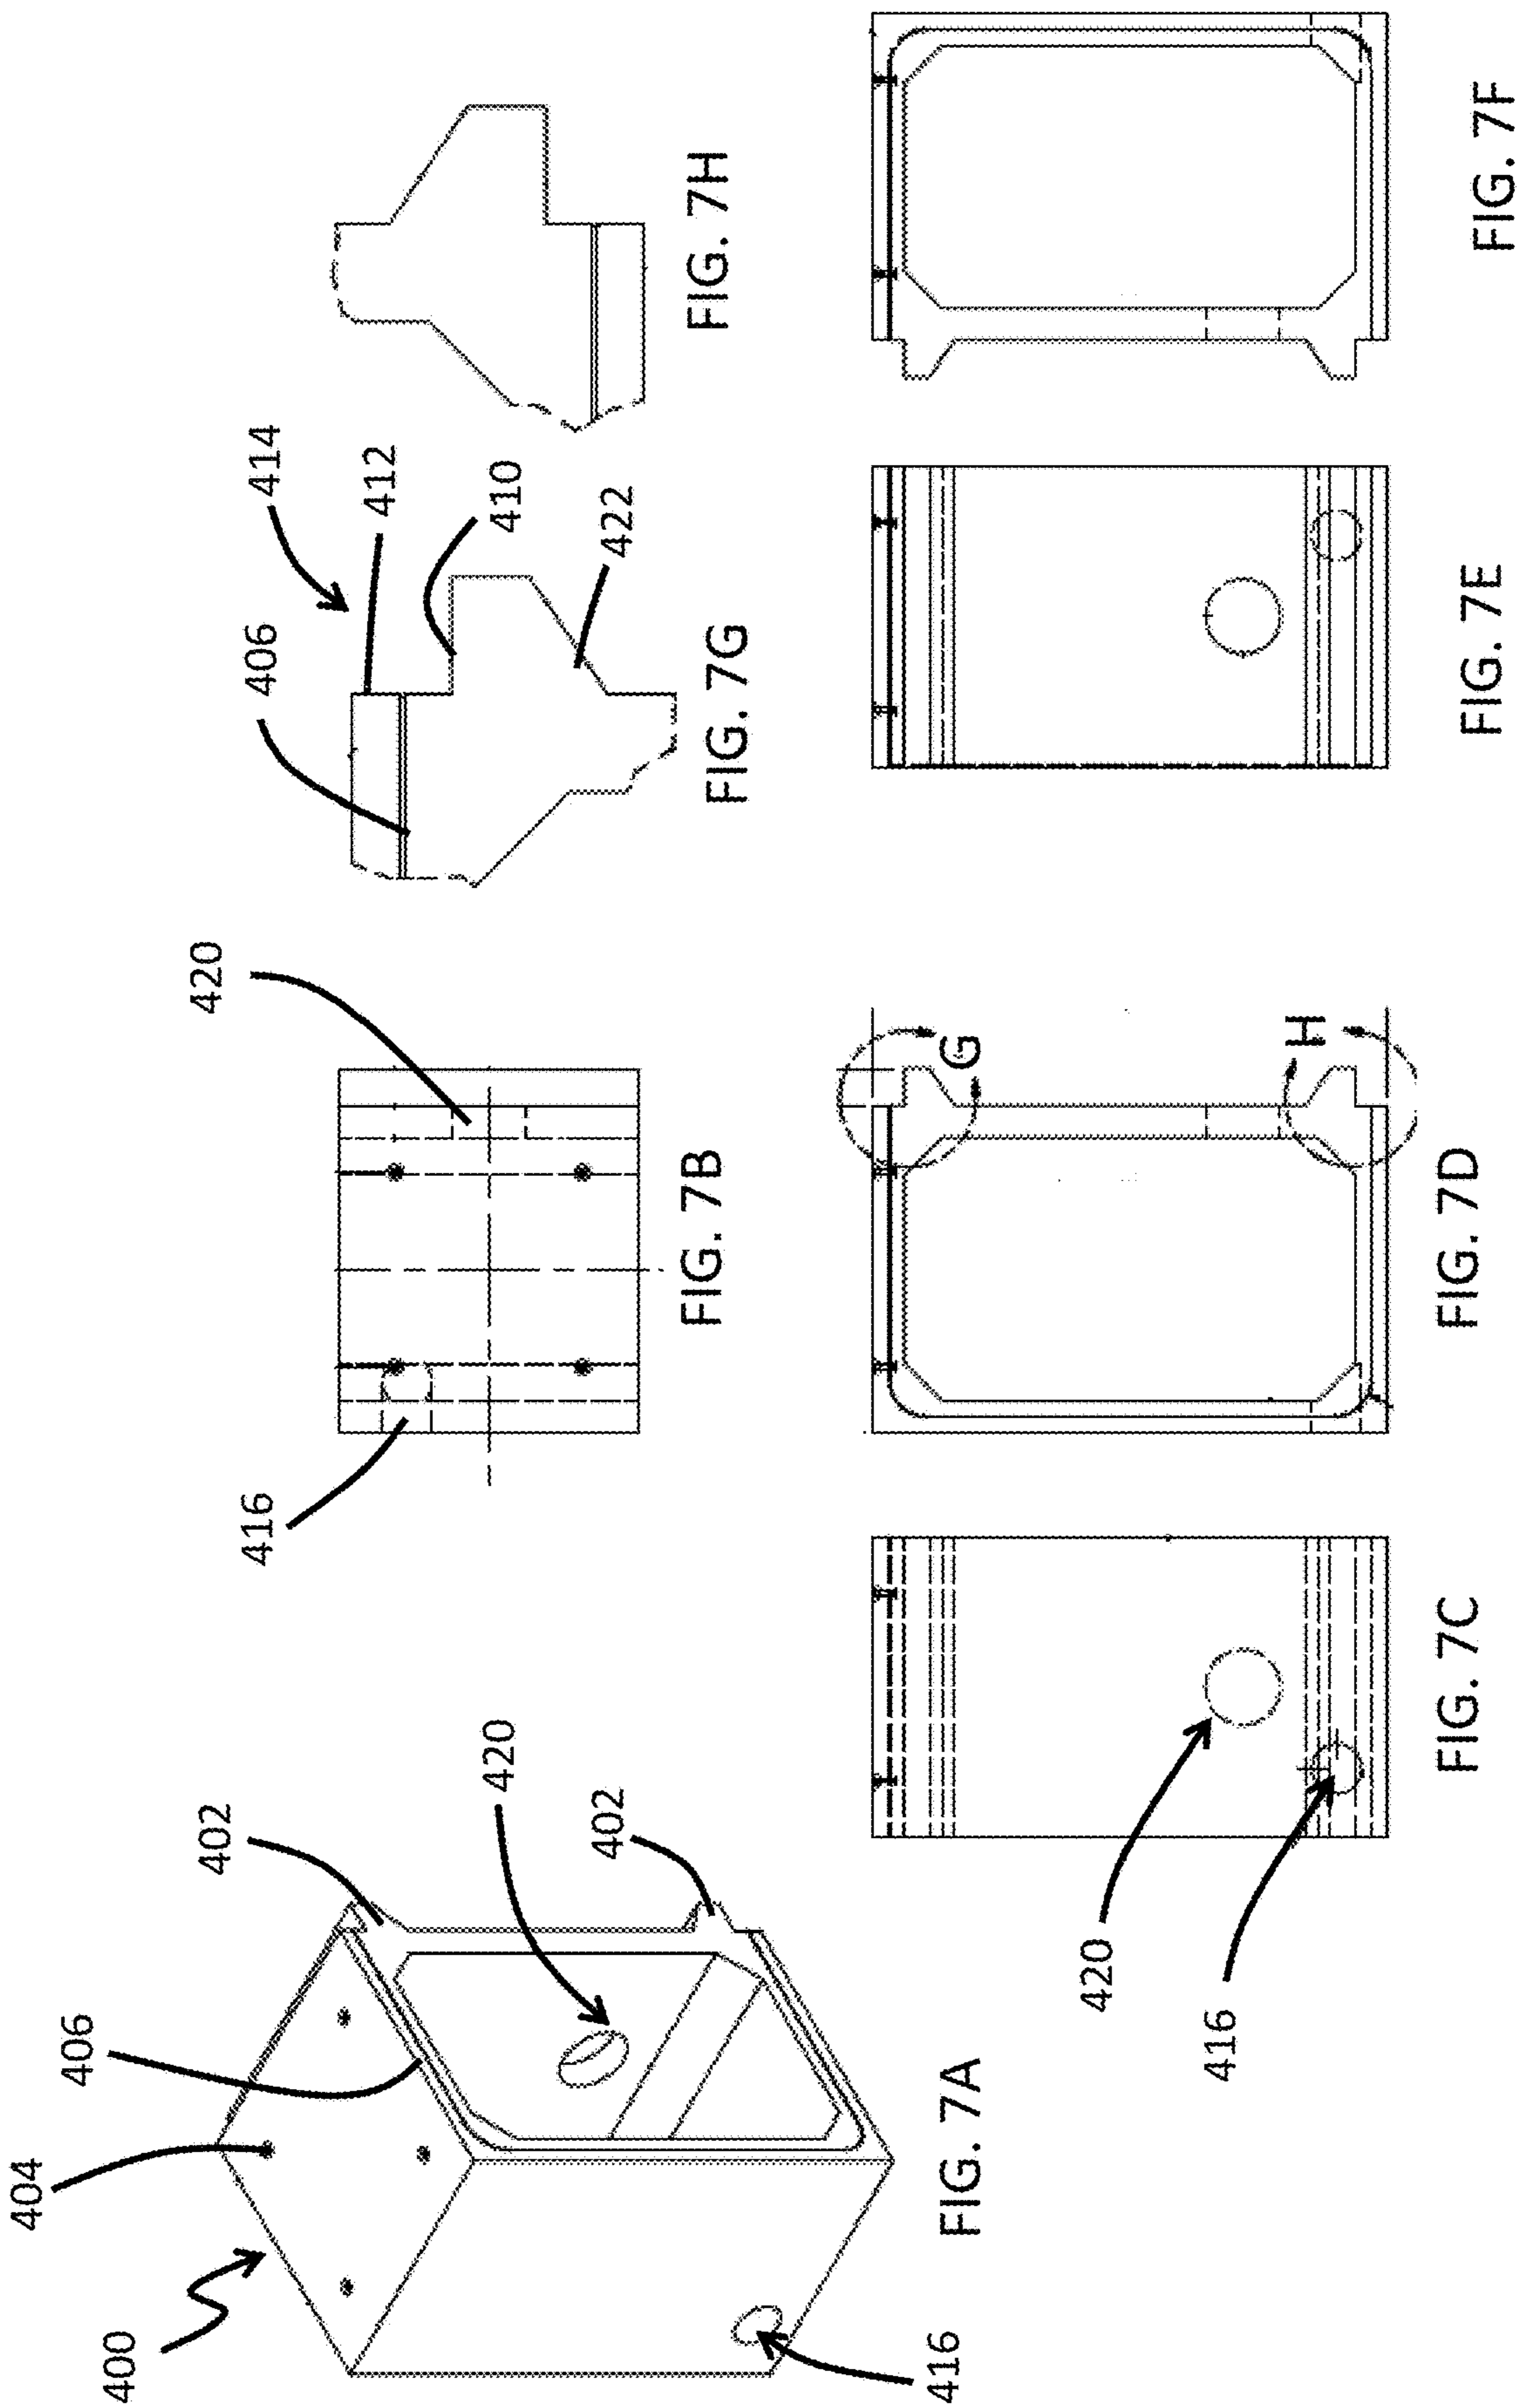
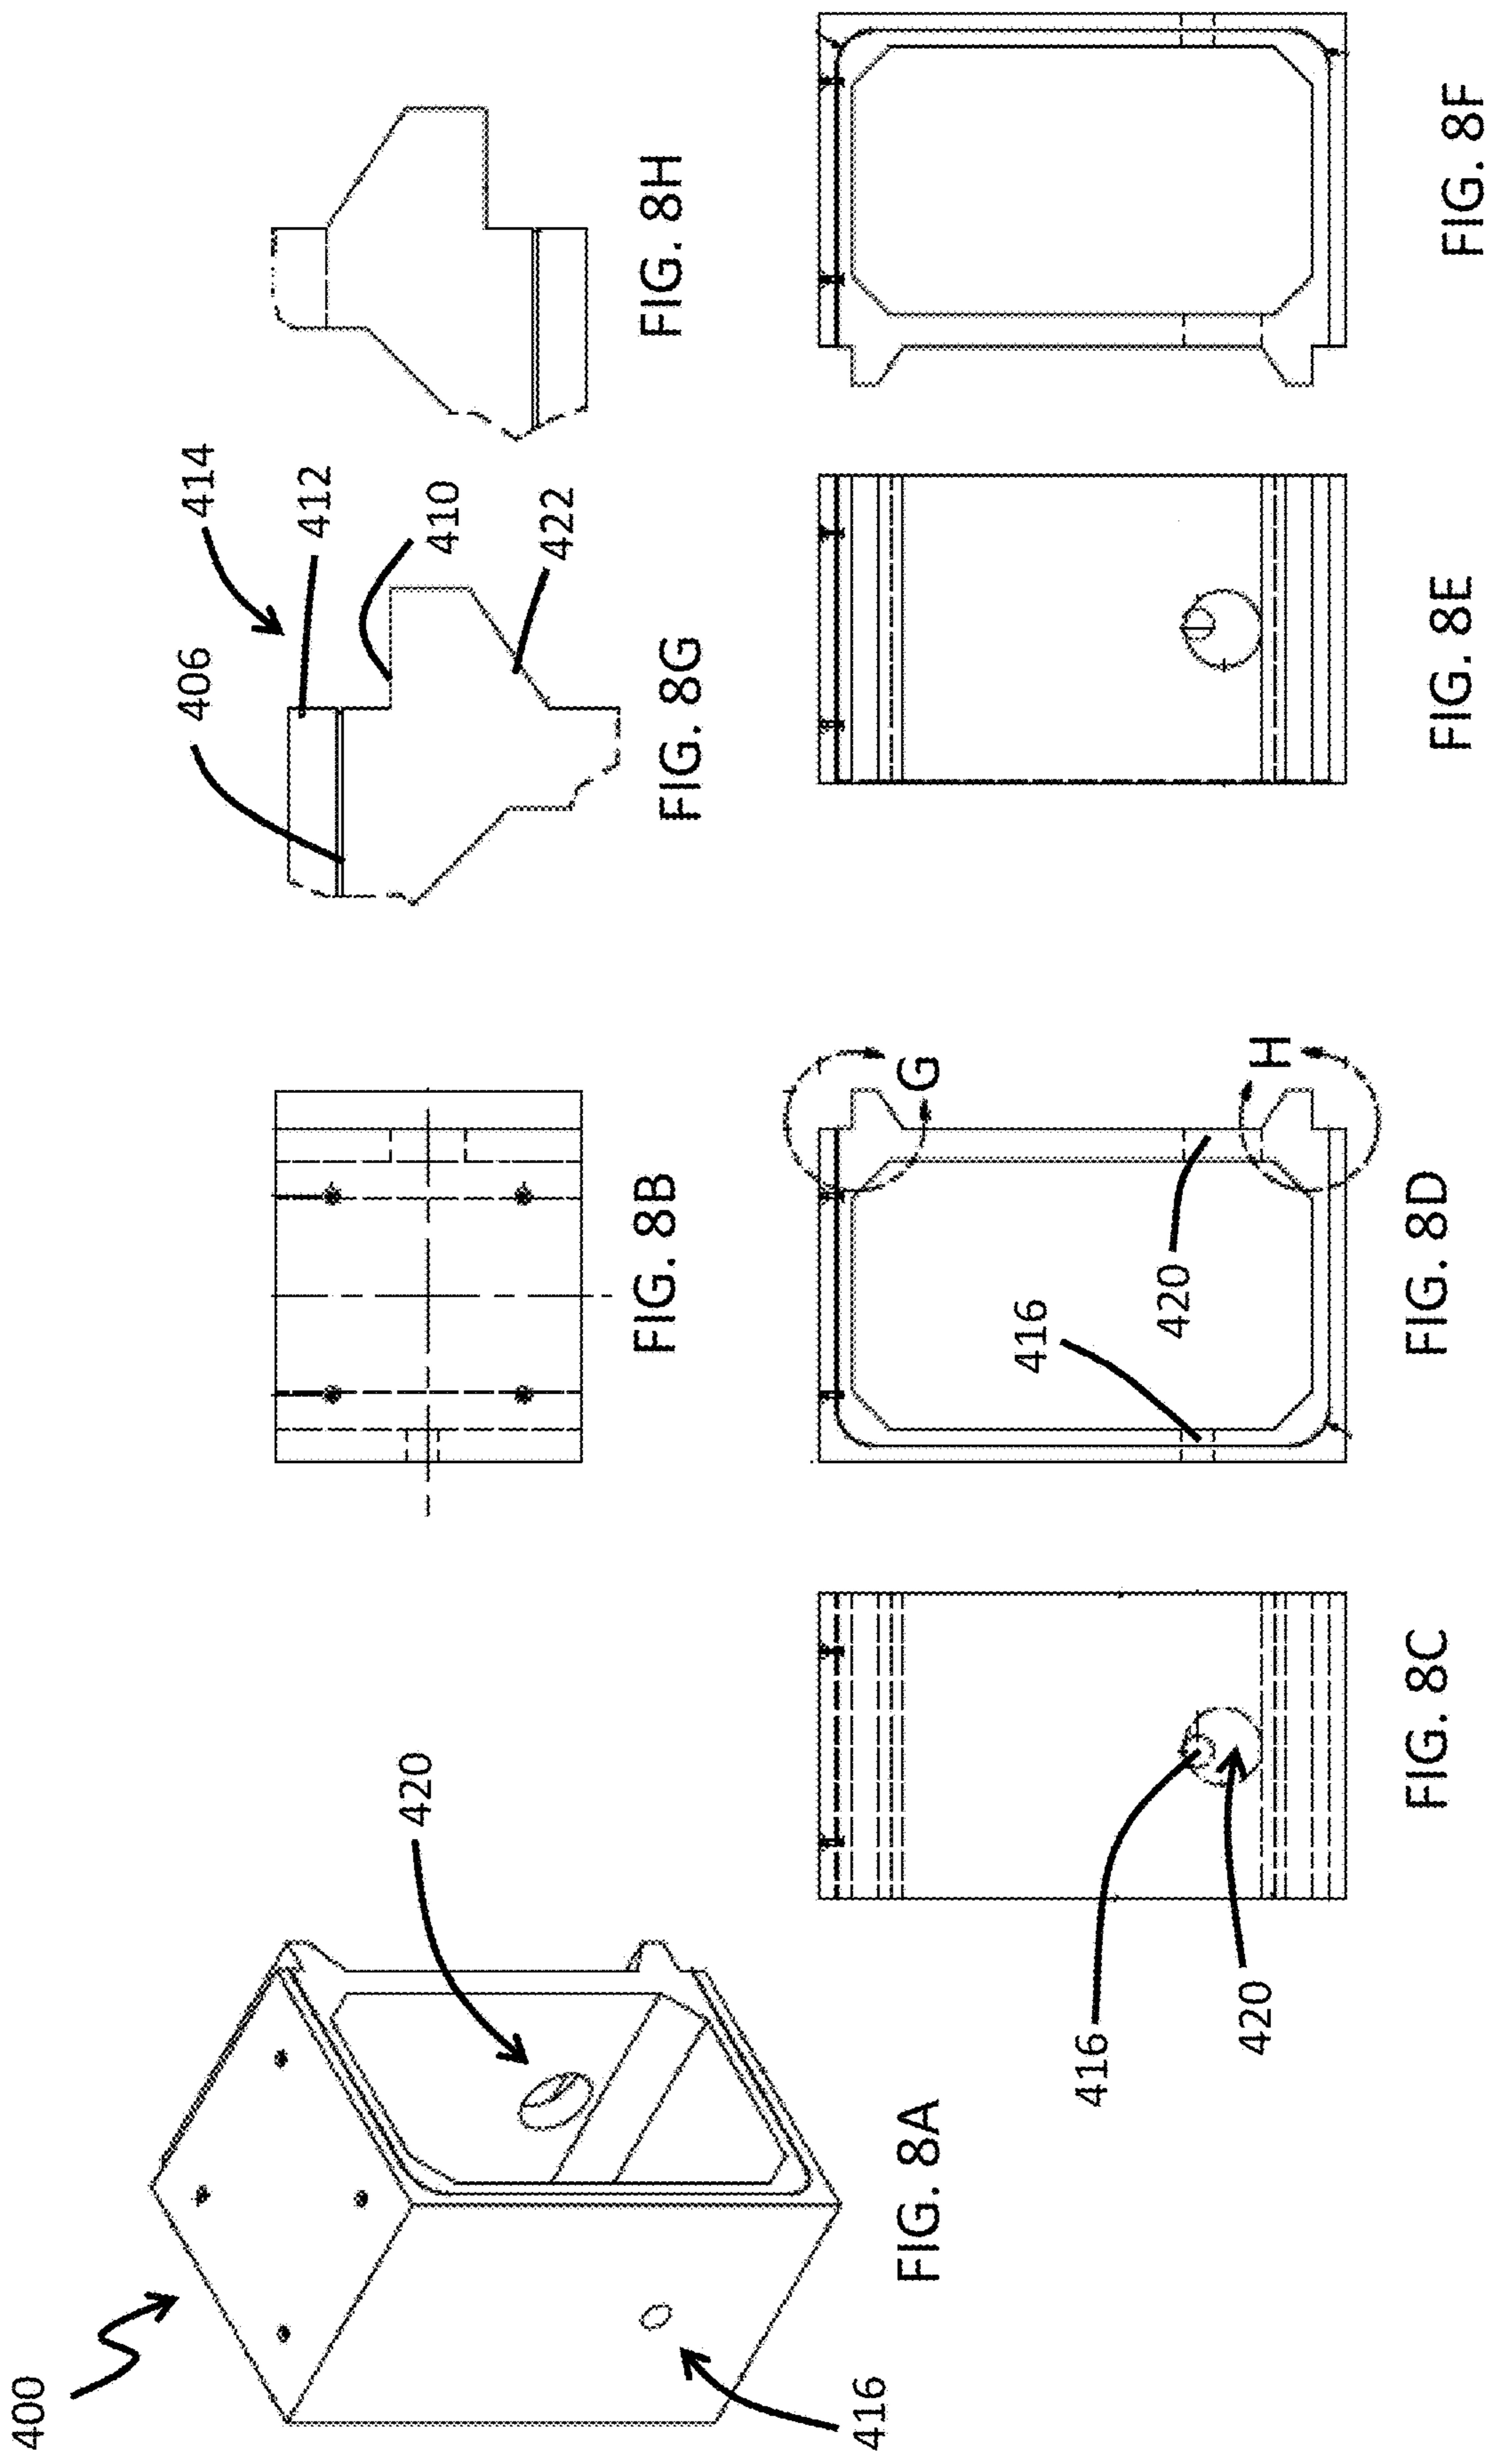


FIG. 5B







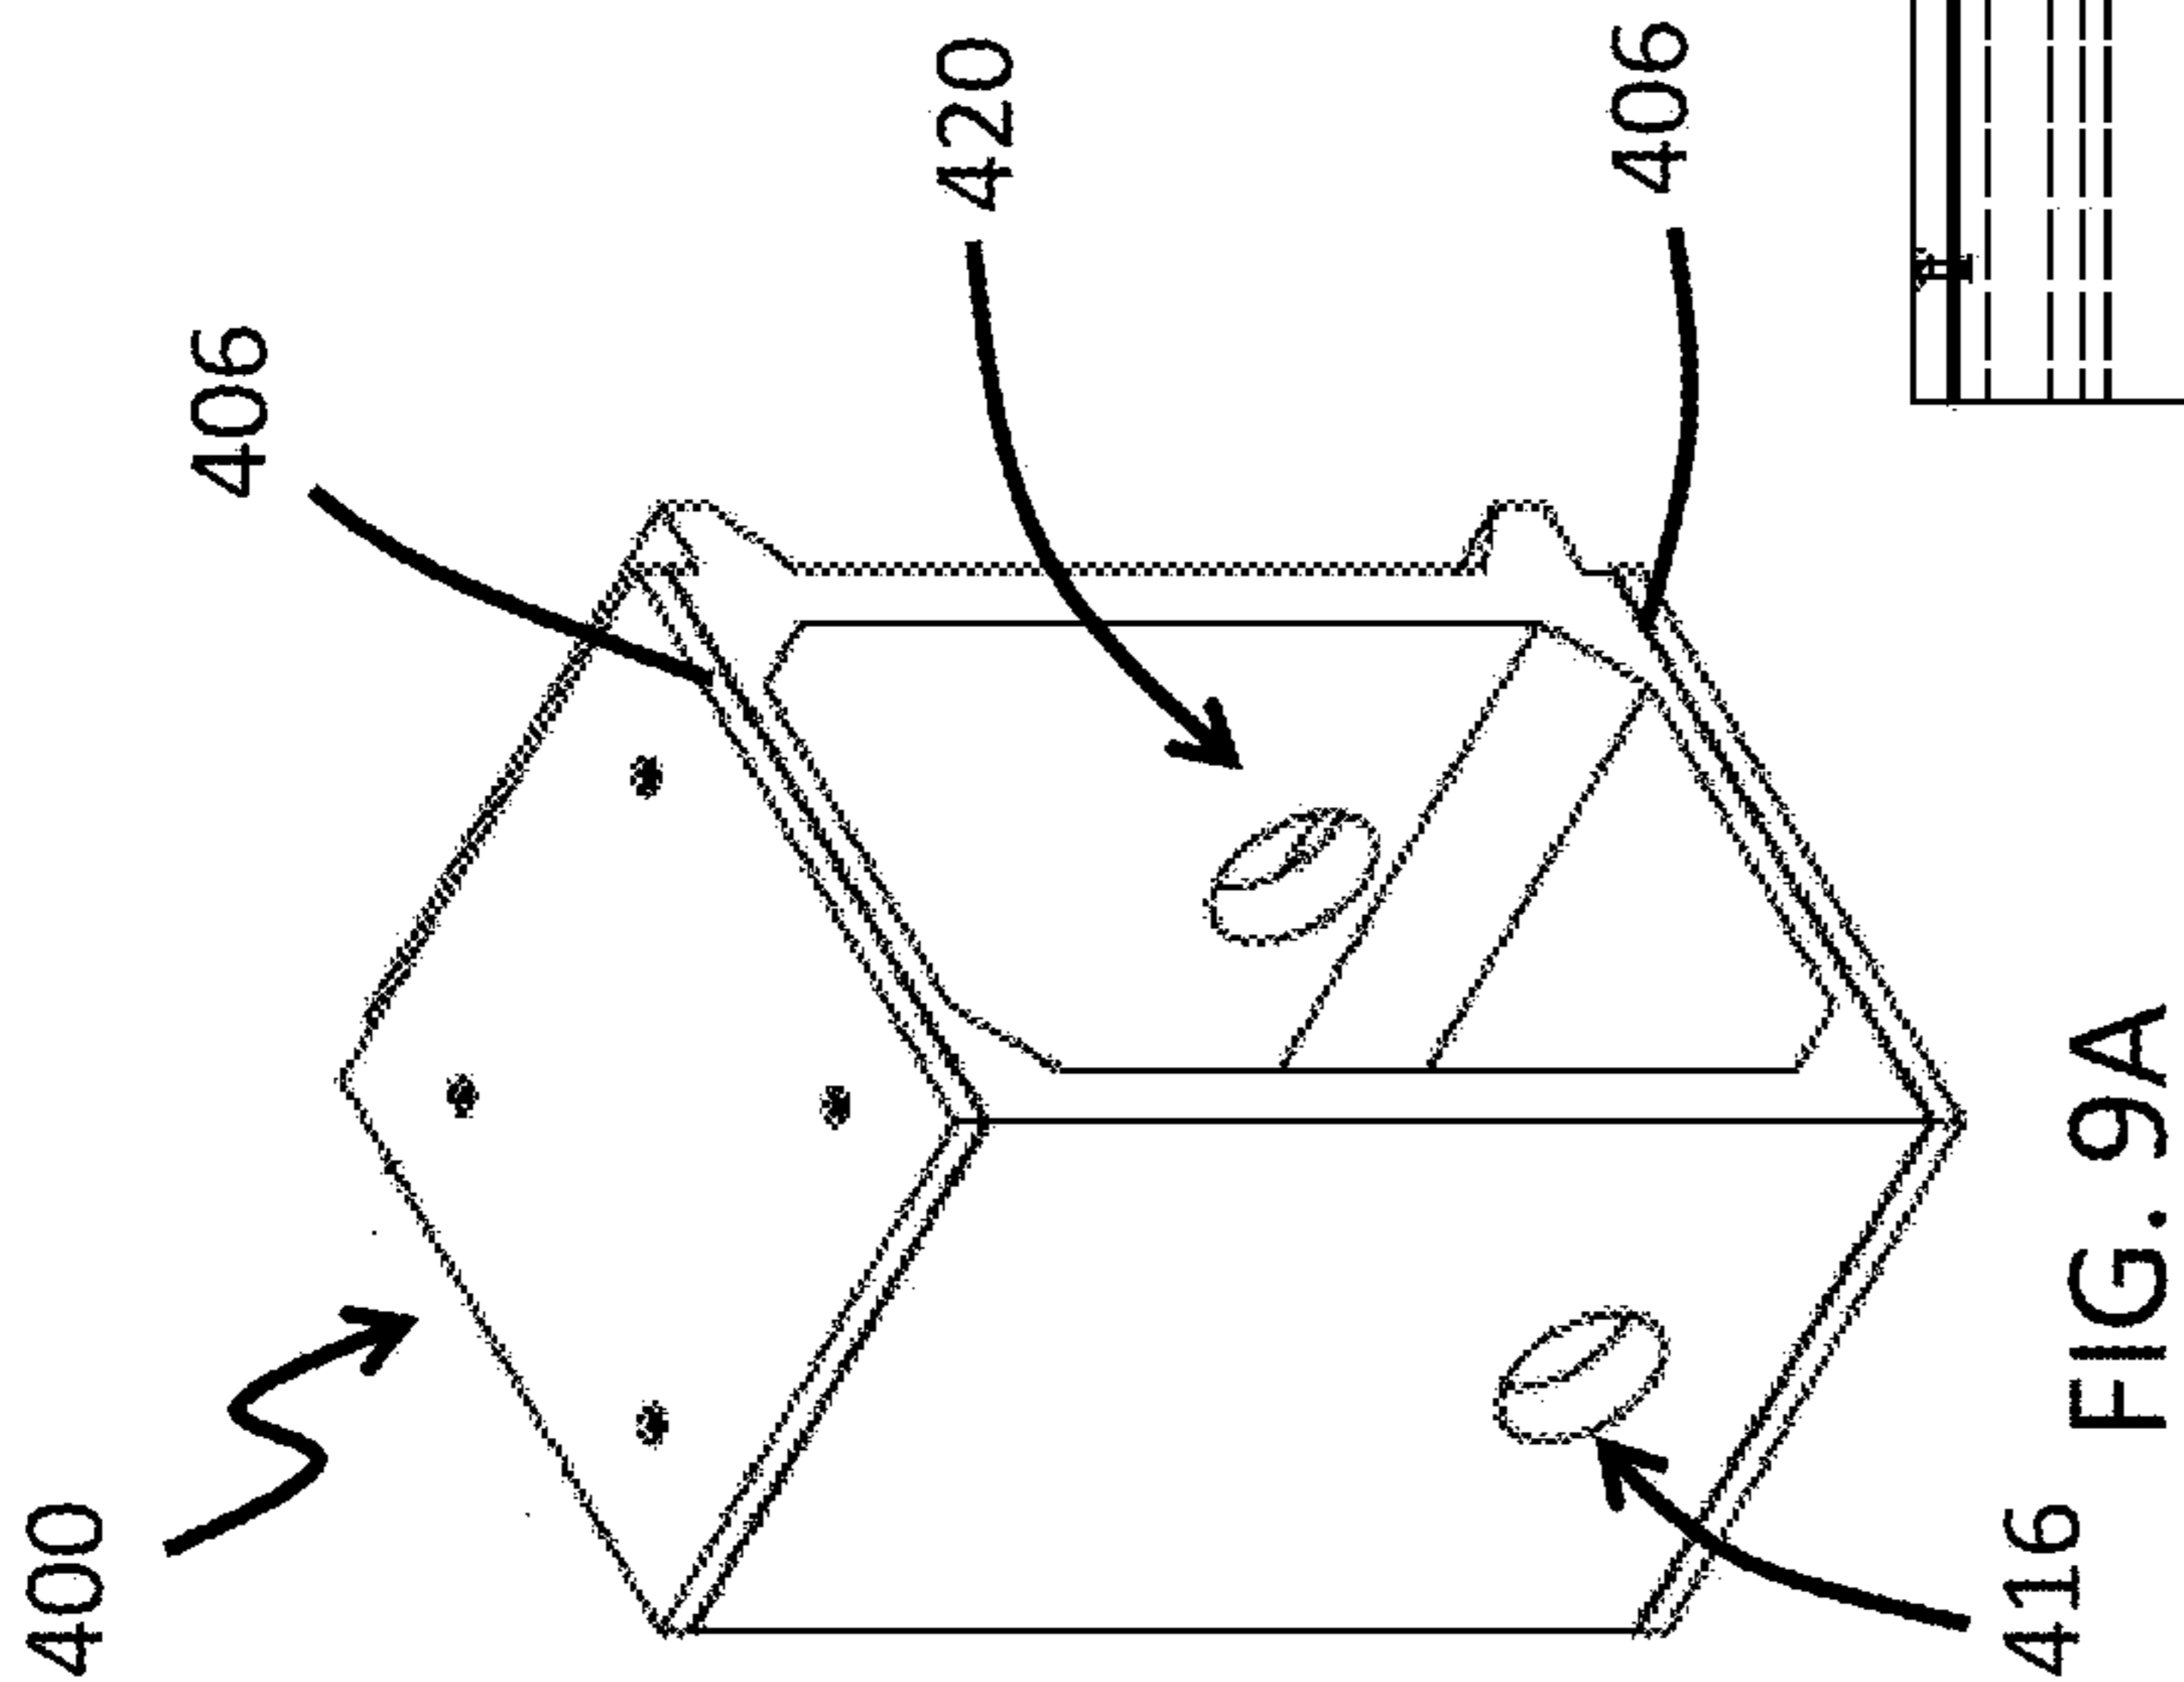


FIG. 9A

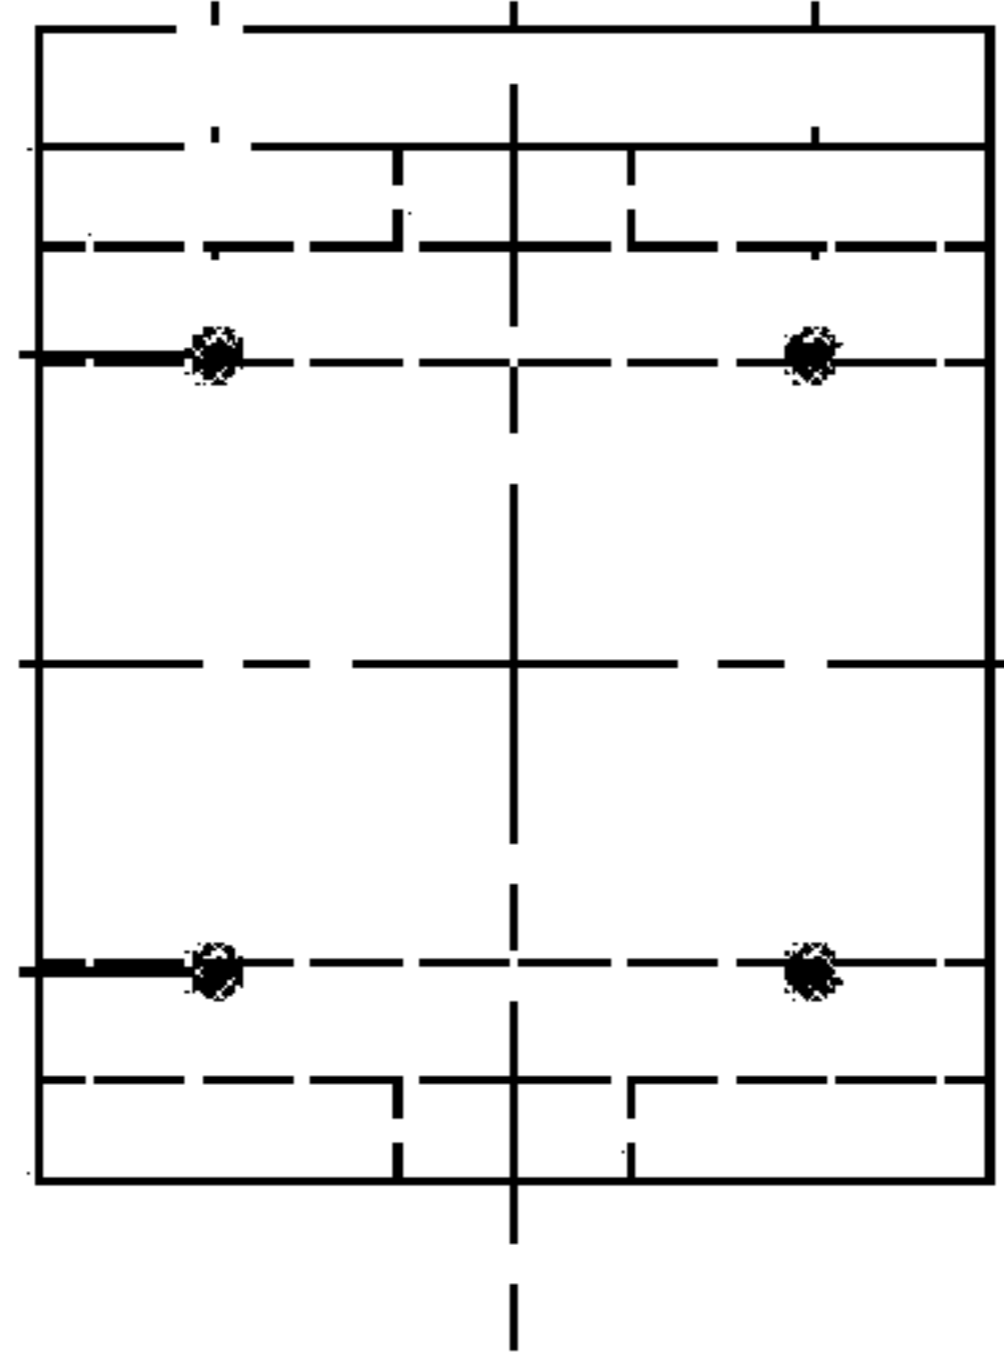


FIG. 9B

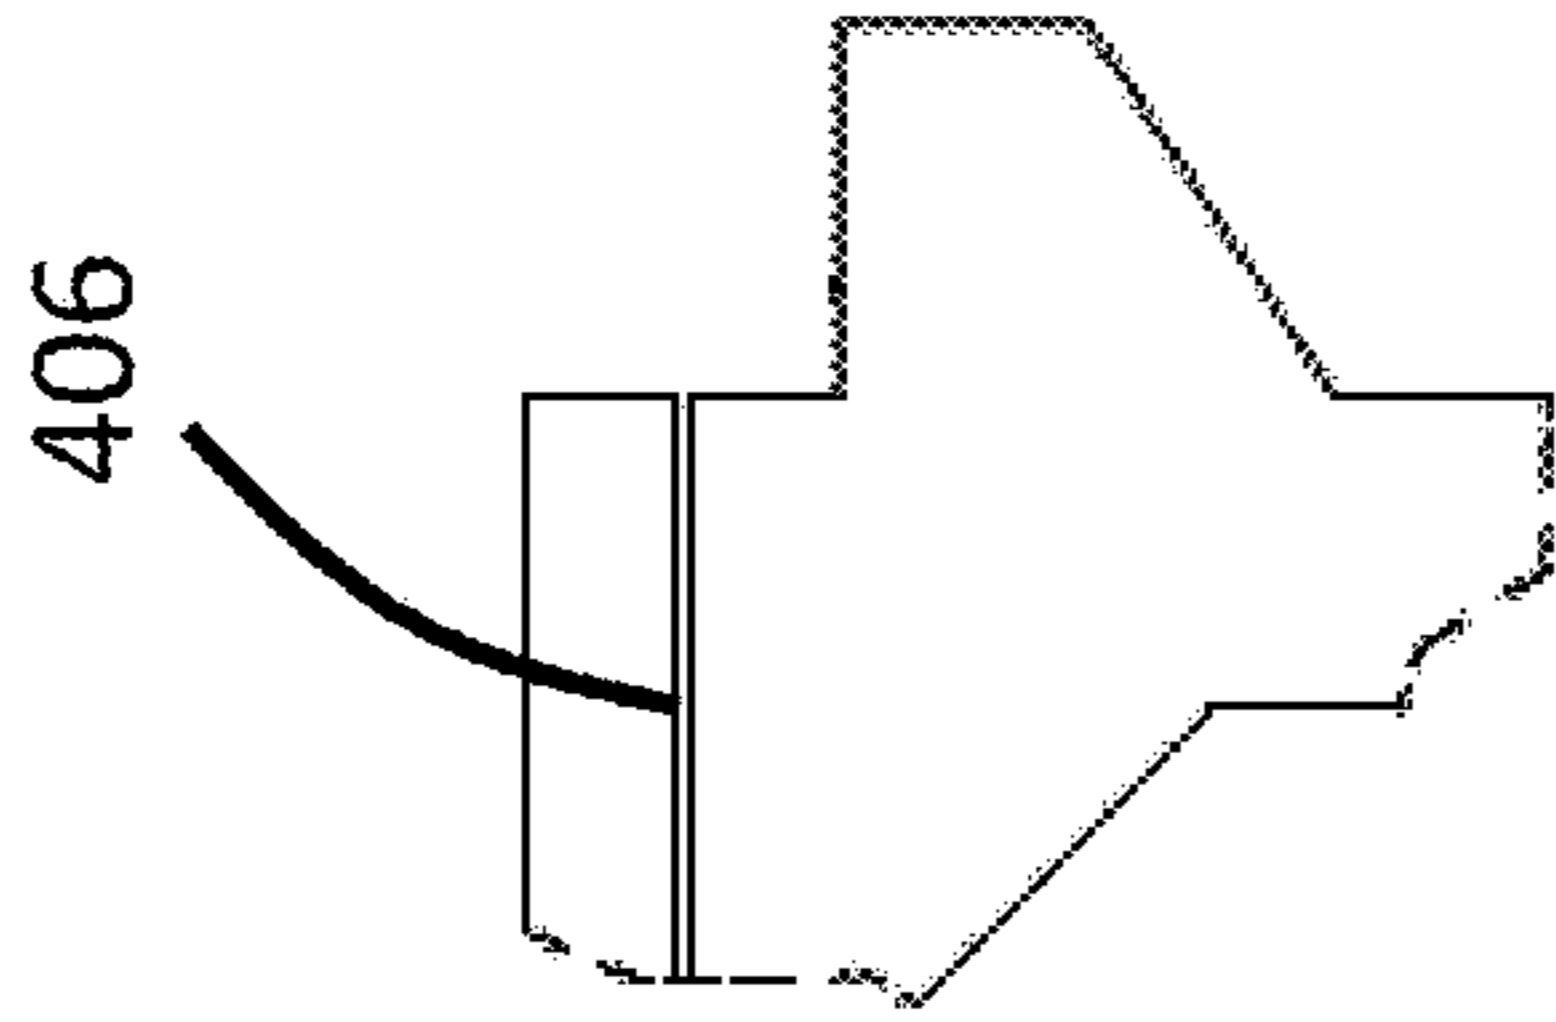


FIG. 9F

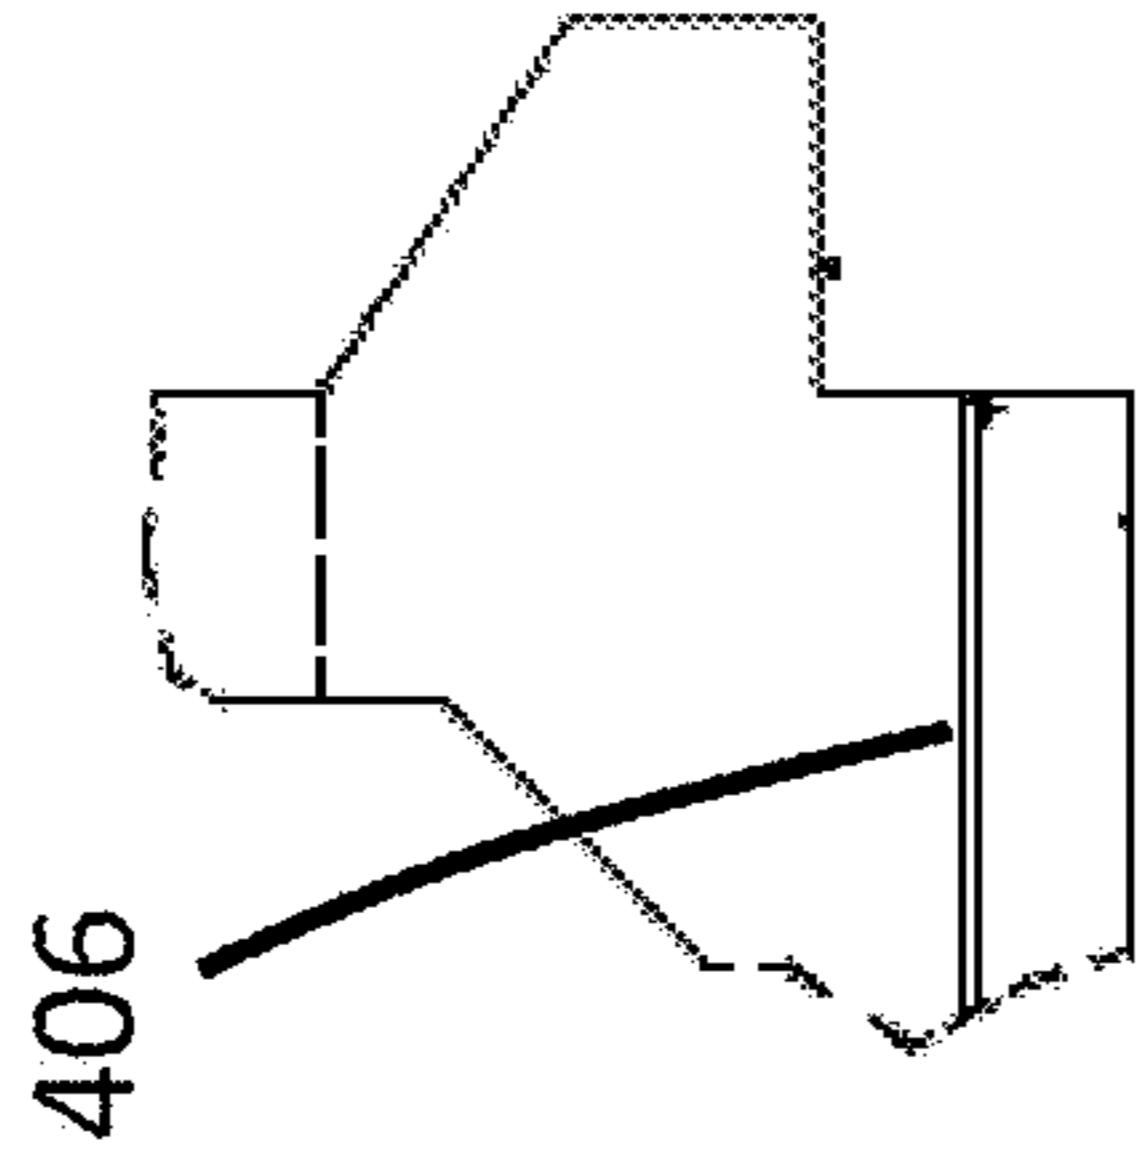


FIG. 9G

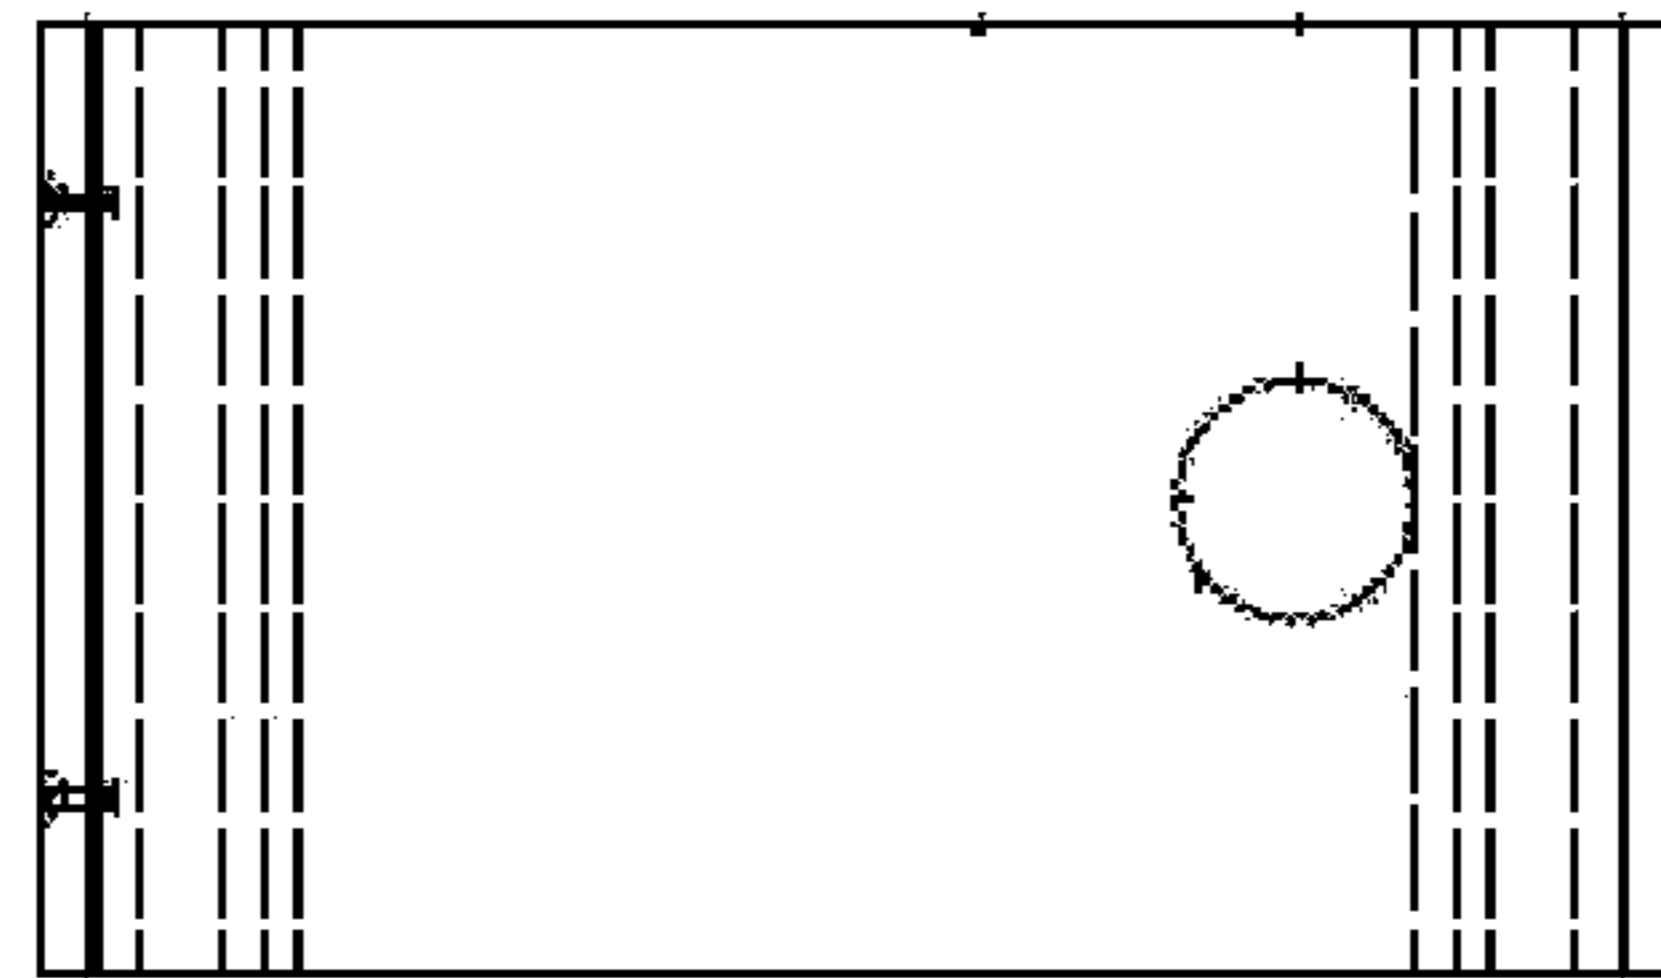


FIG. 9C

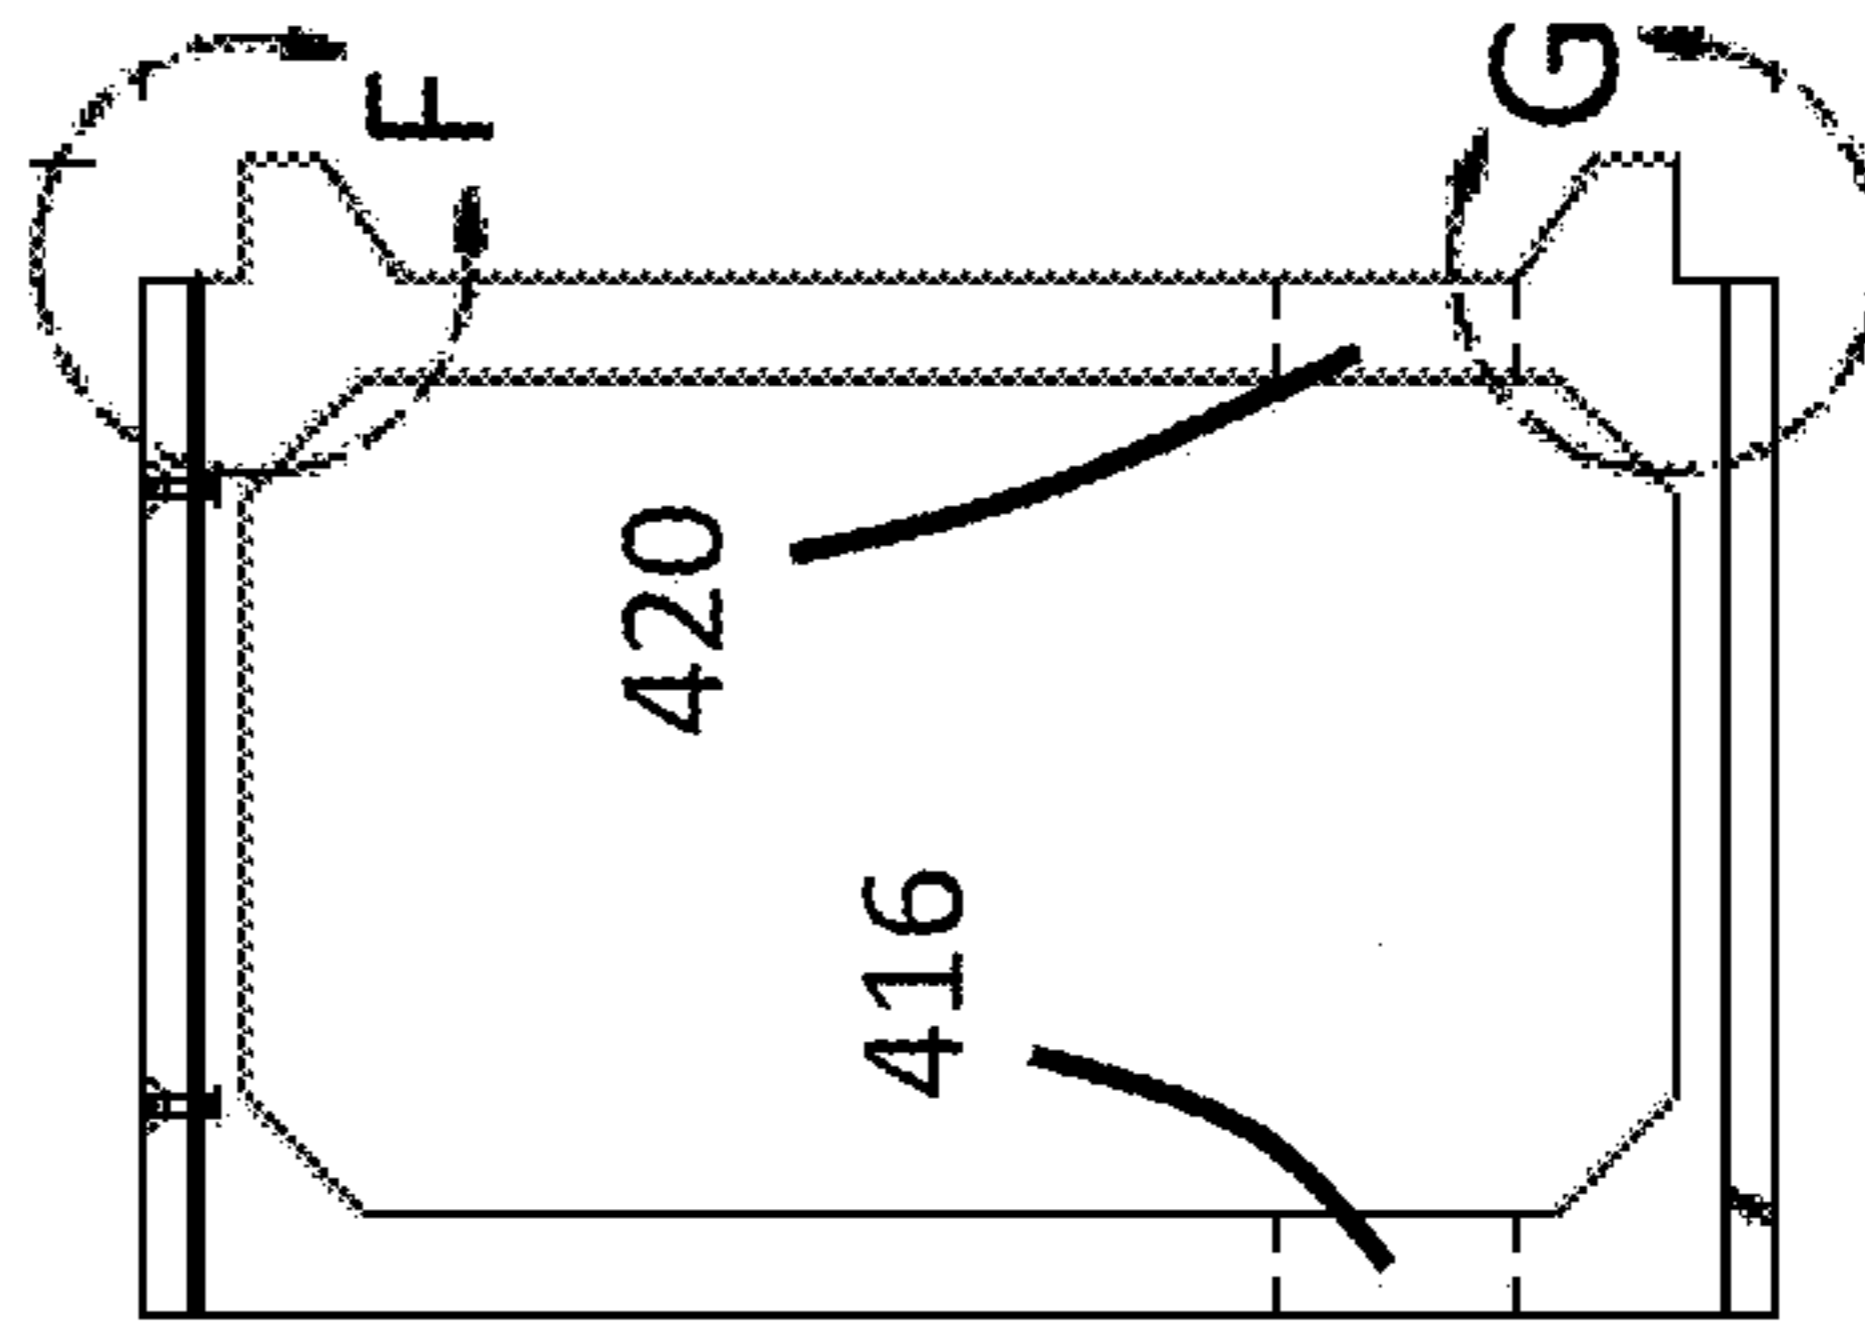


FIG. 9D

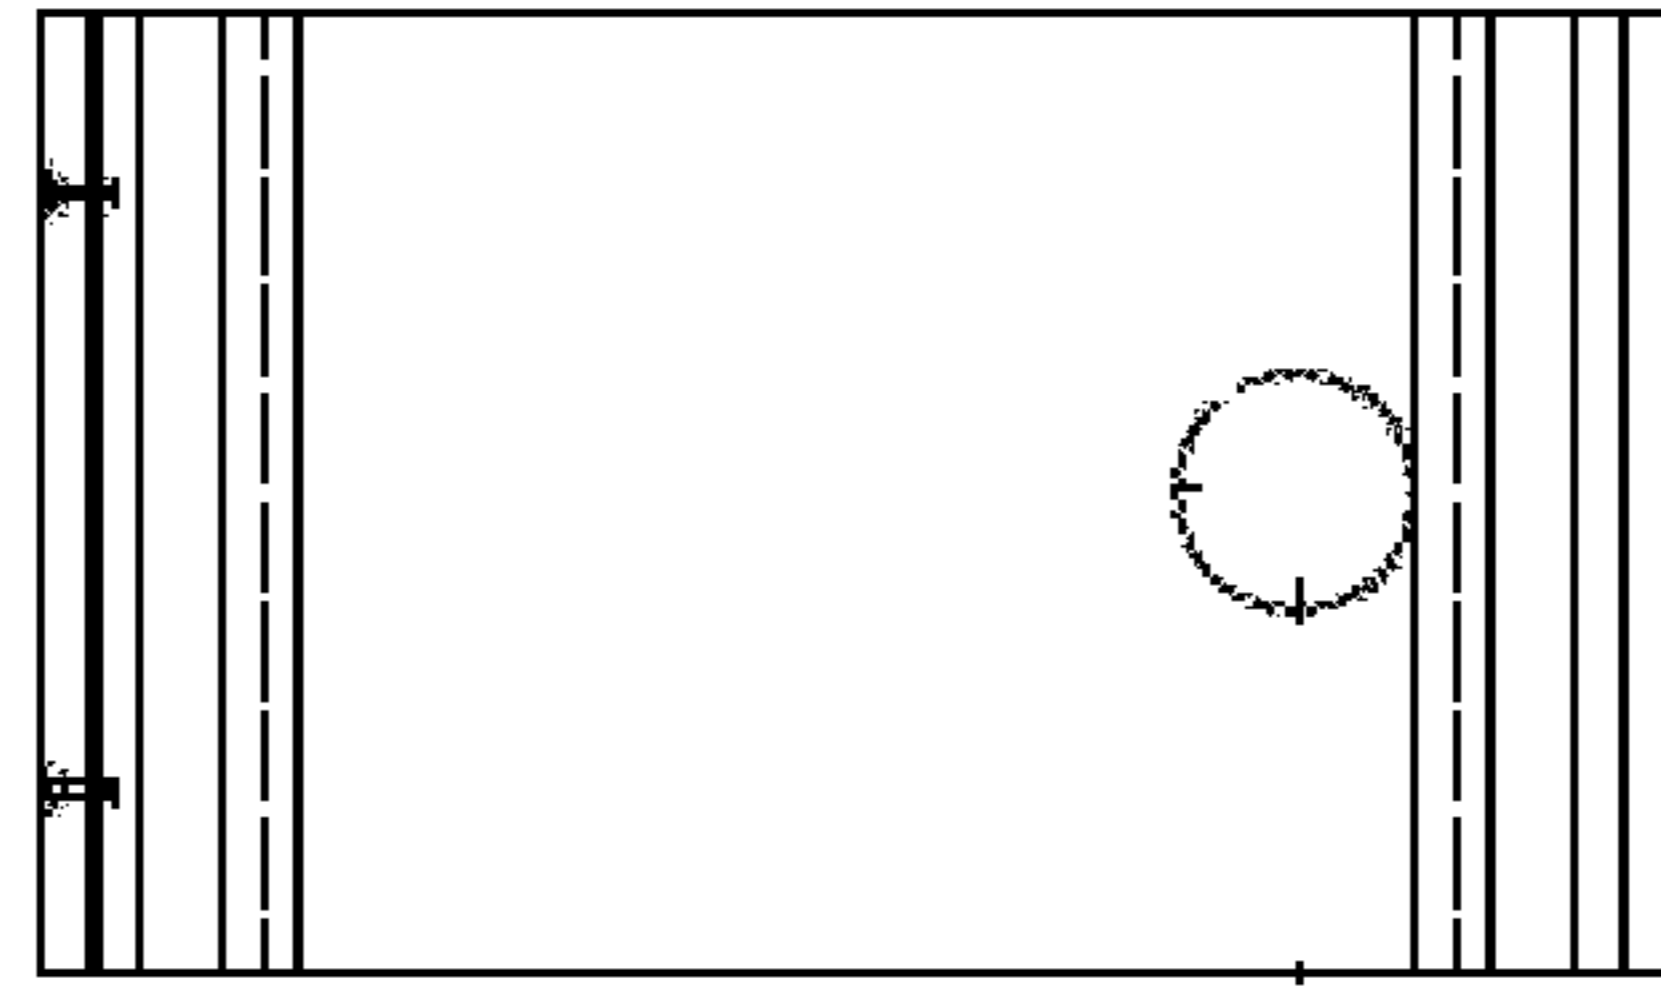


FIG. 9E

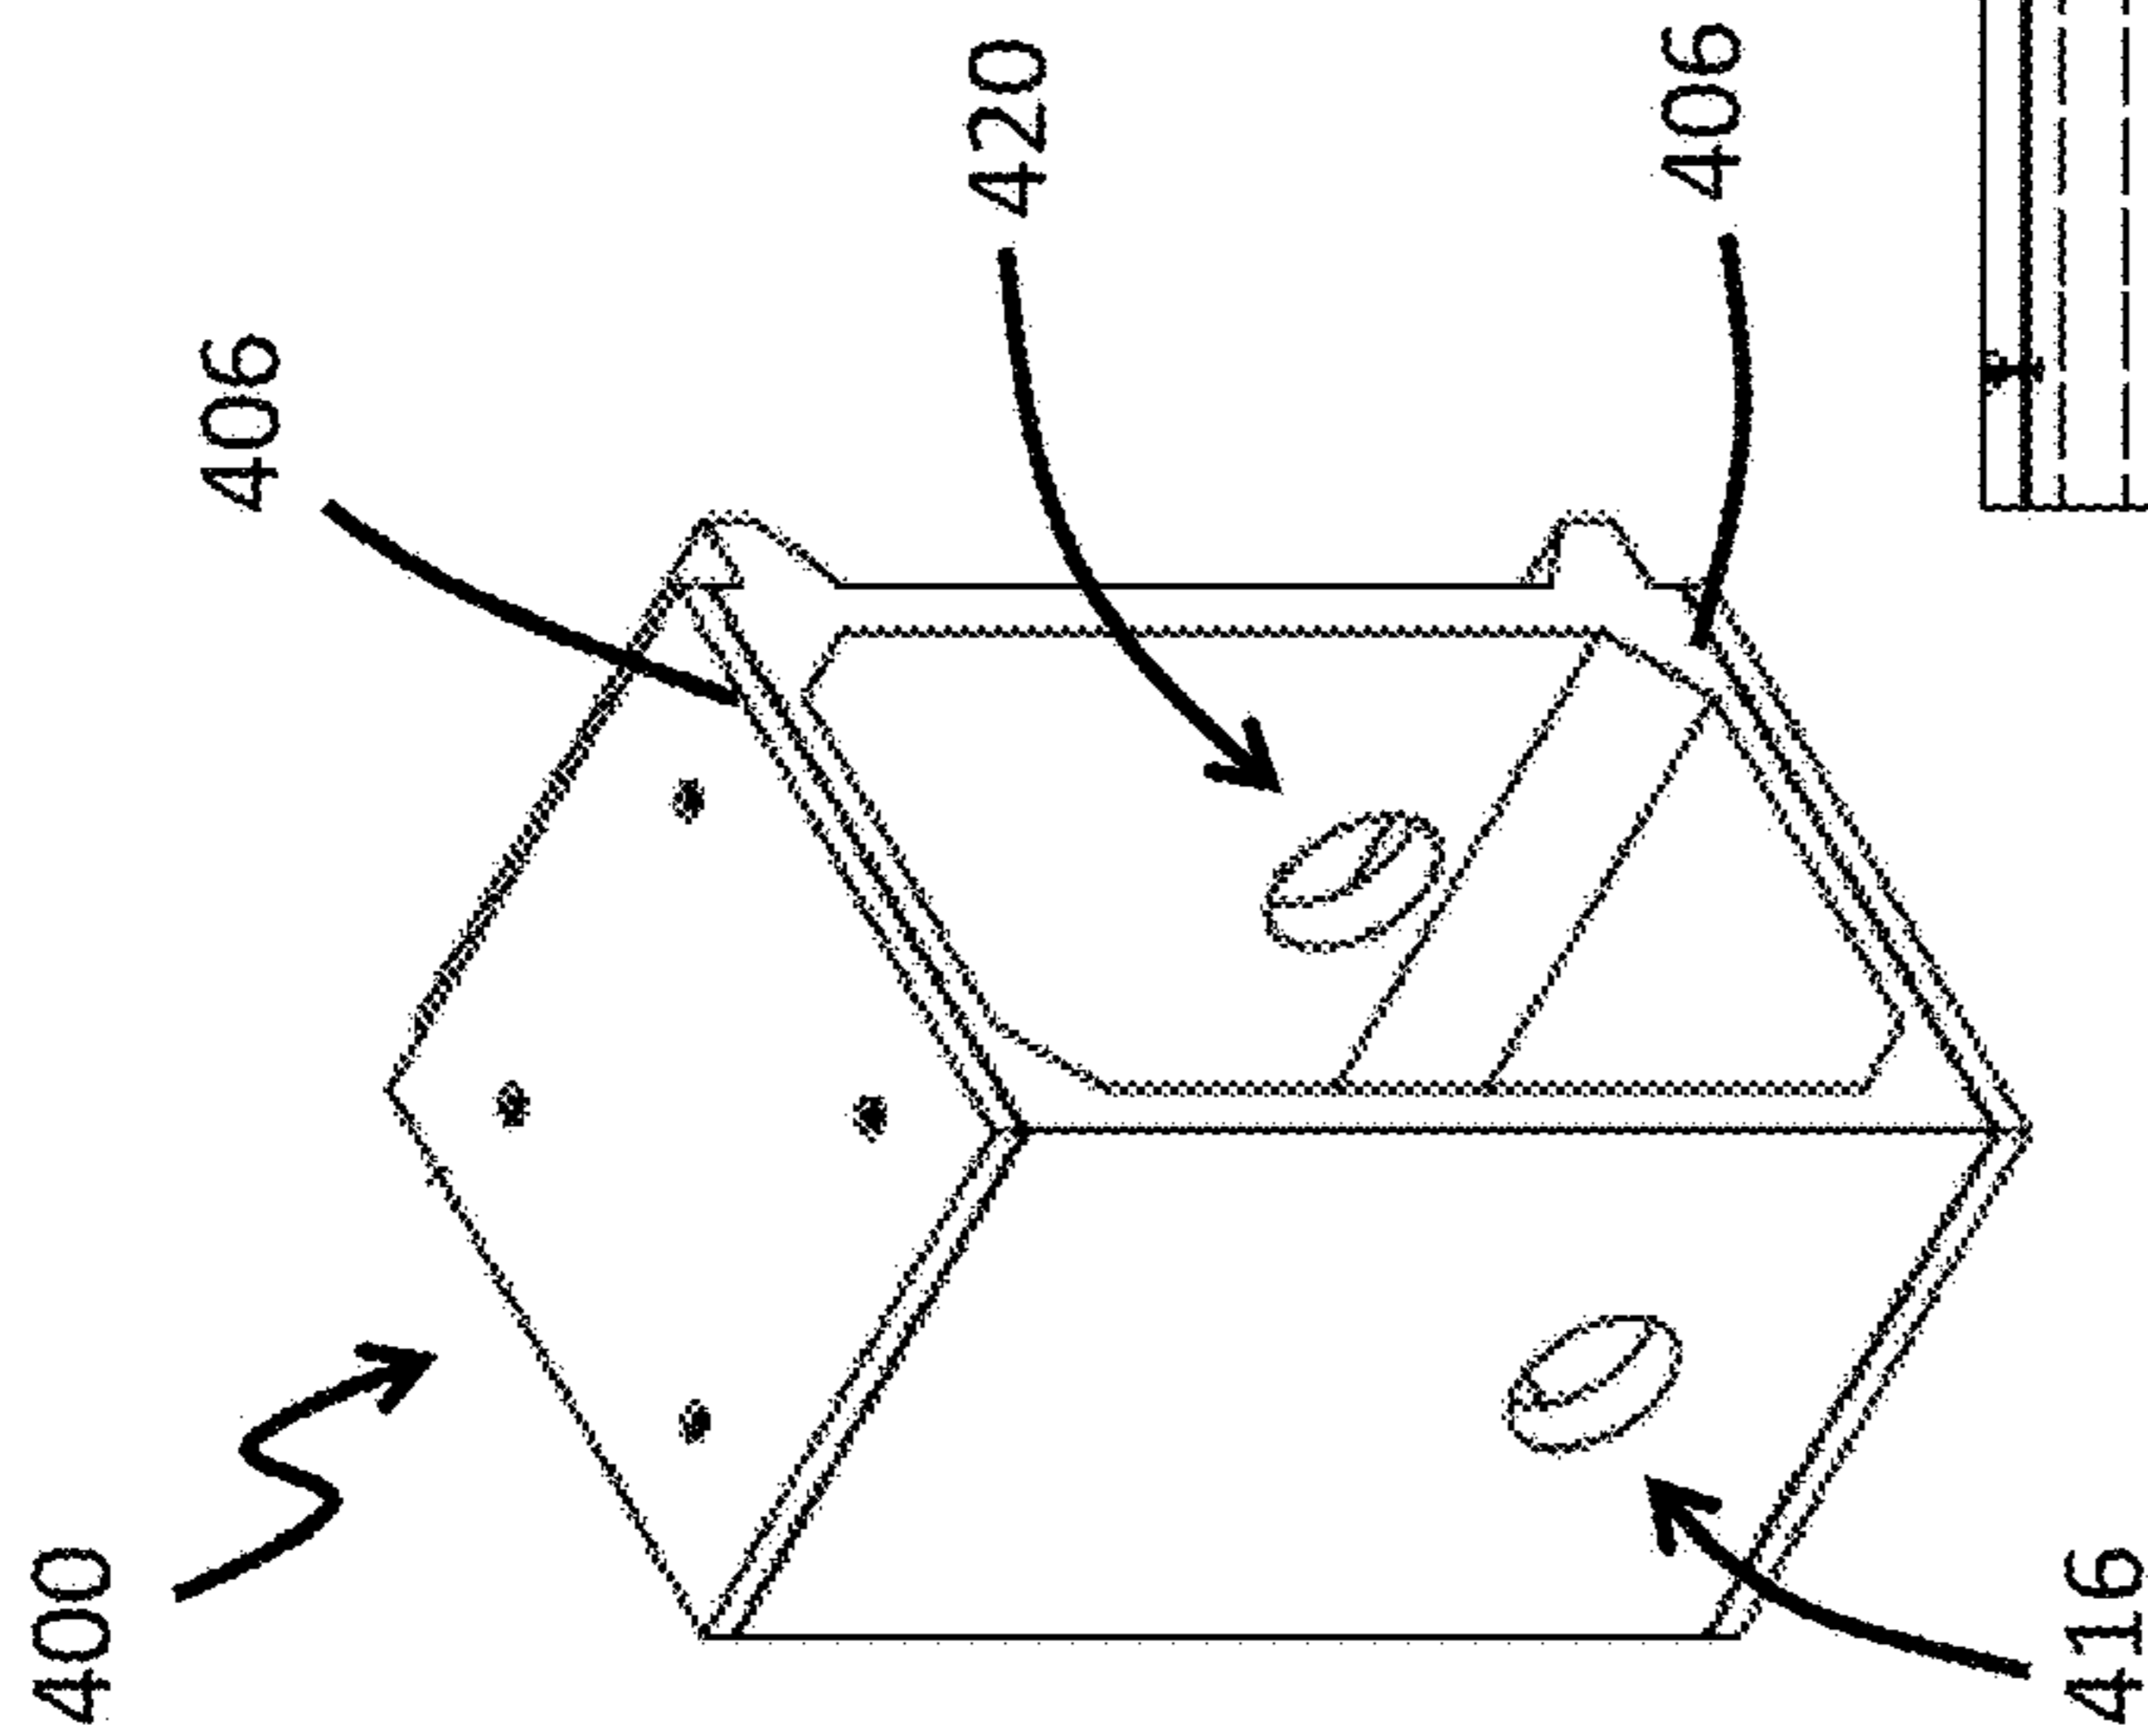


FIG. 10A

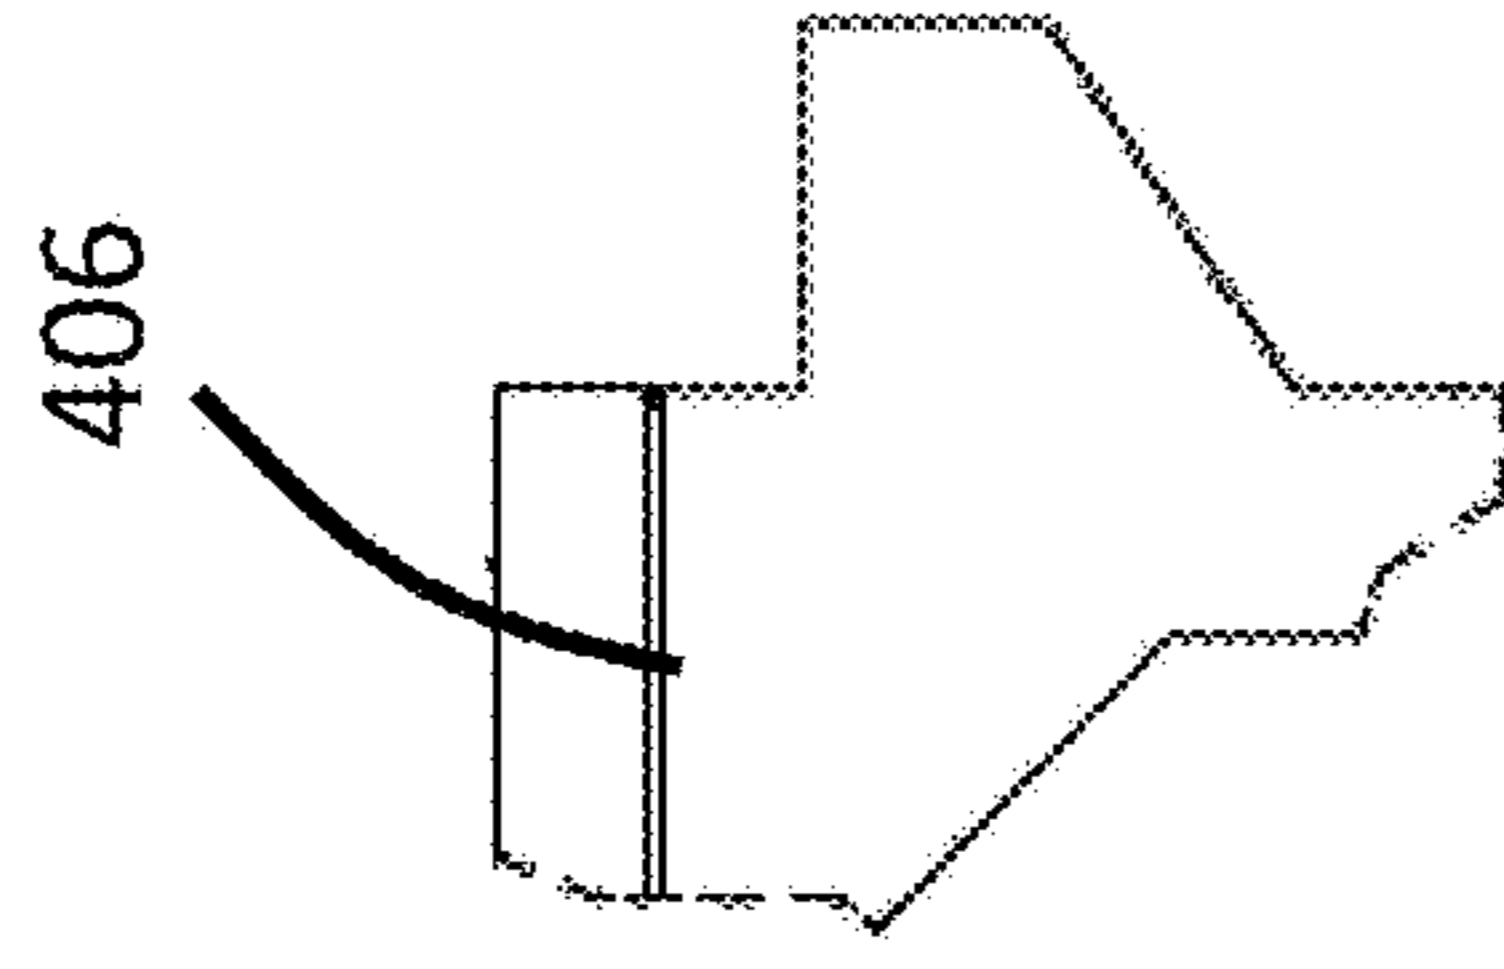


FIG. 10F

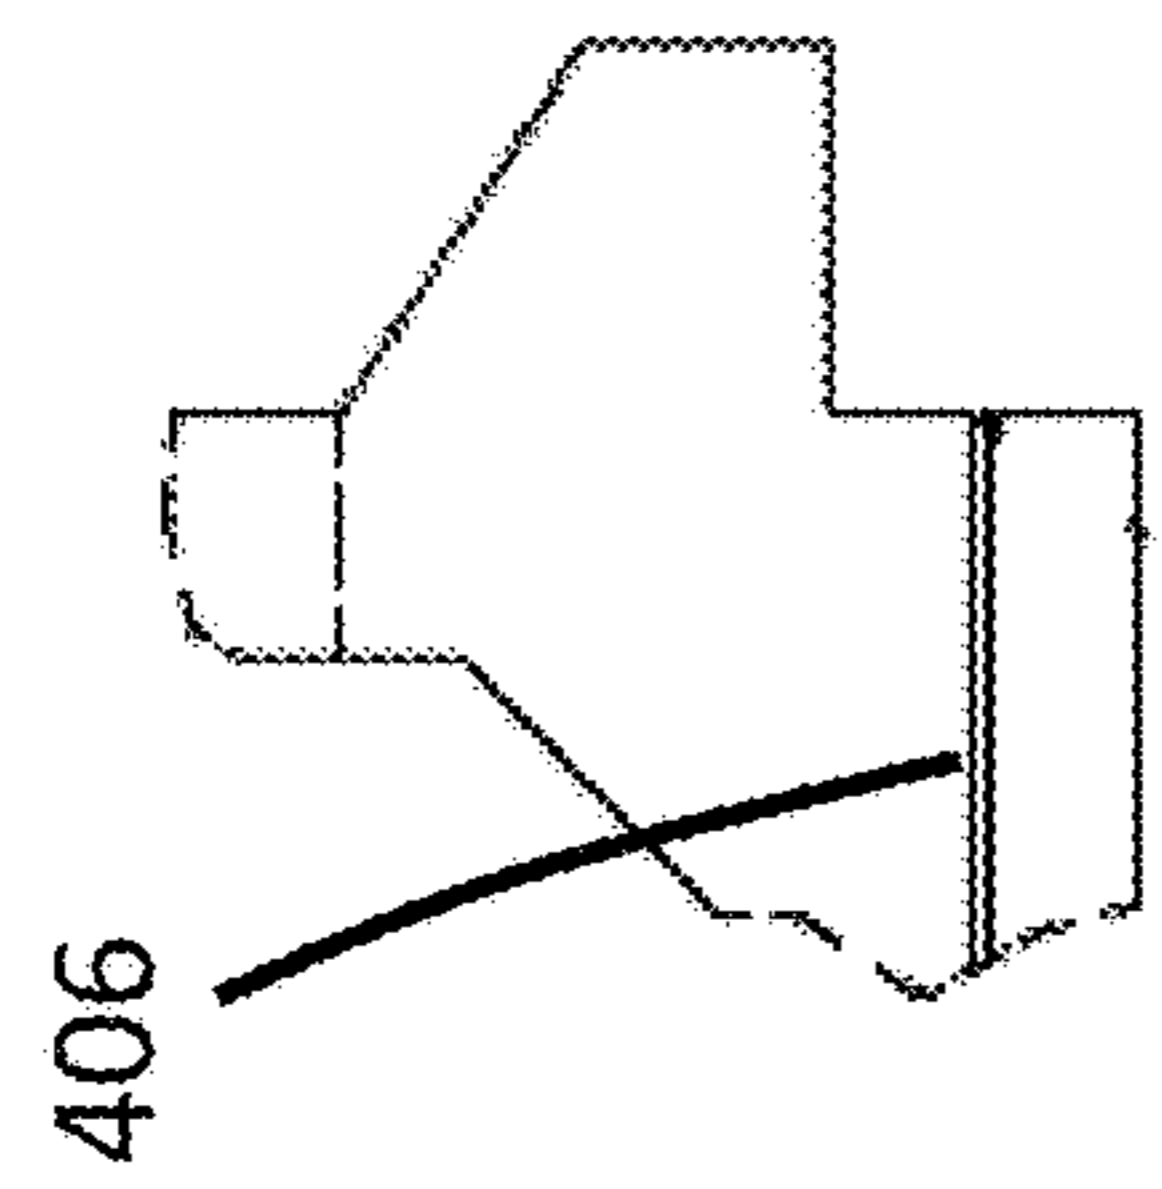


FIG. 10G

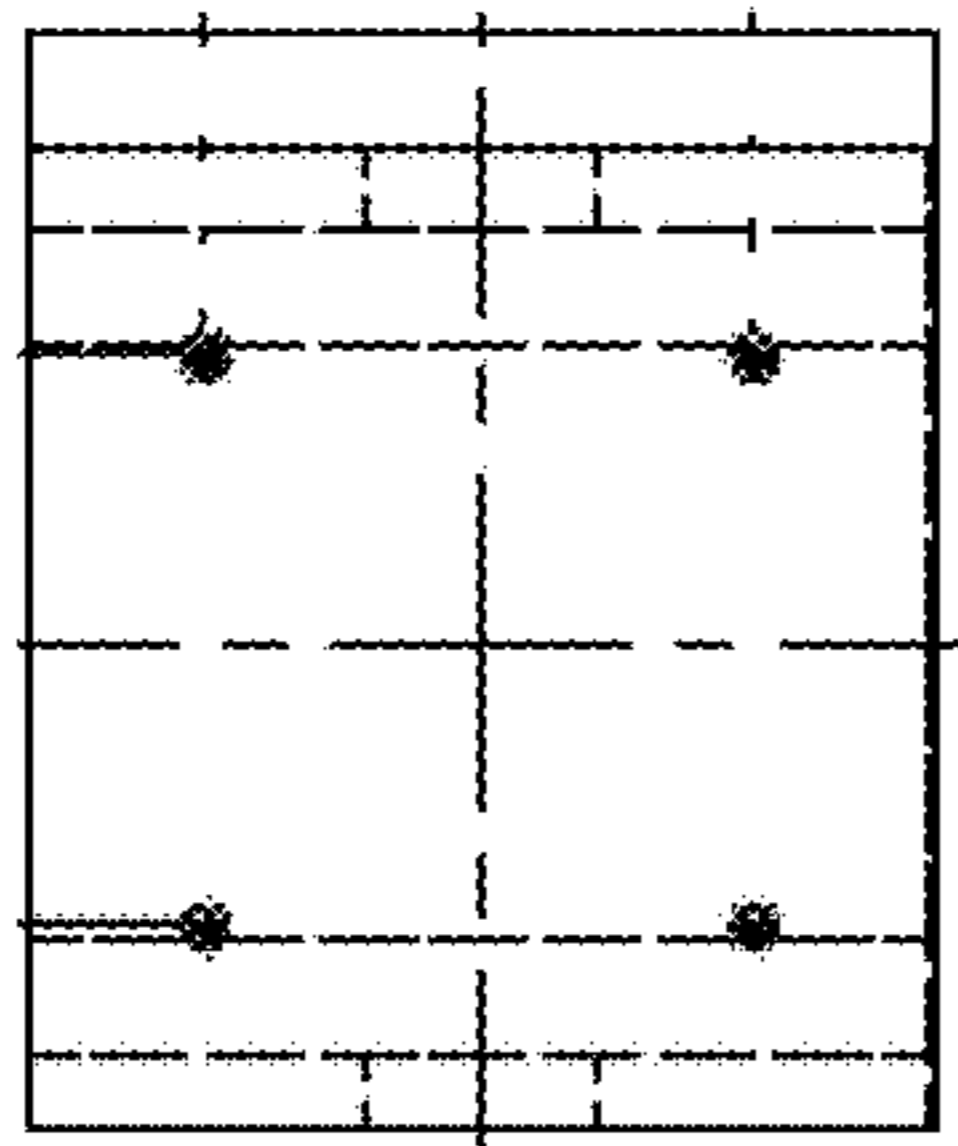


FIG. 10B

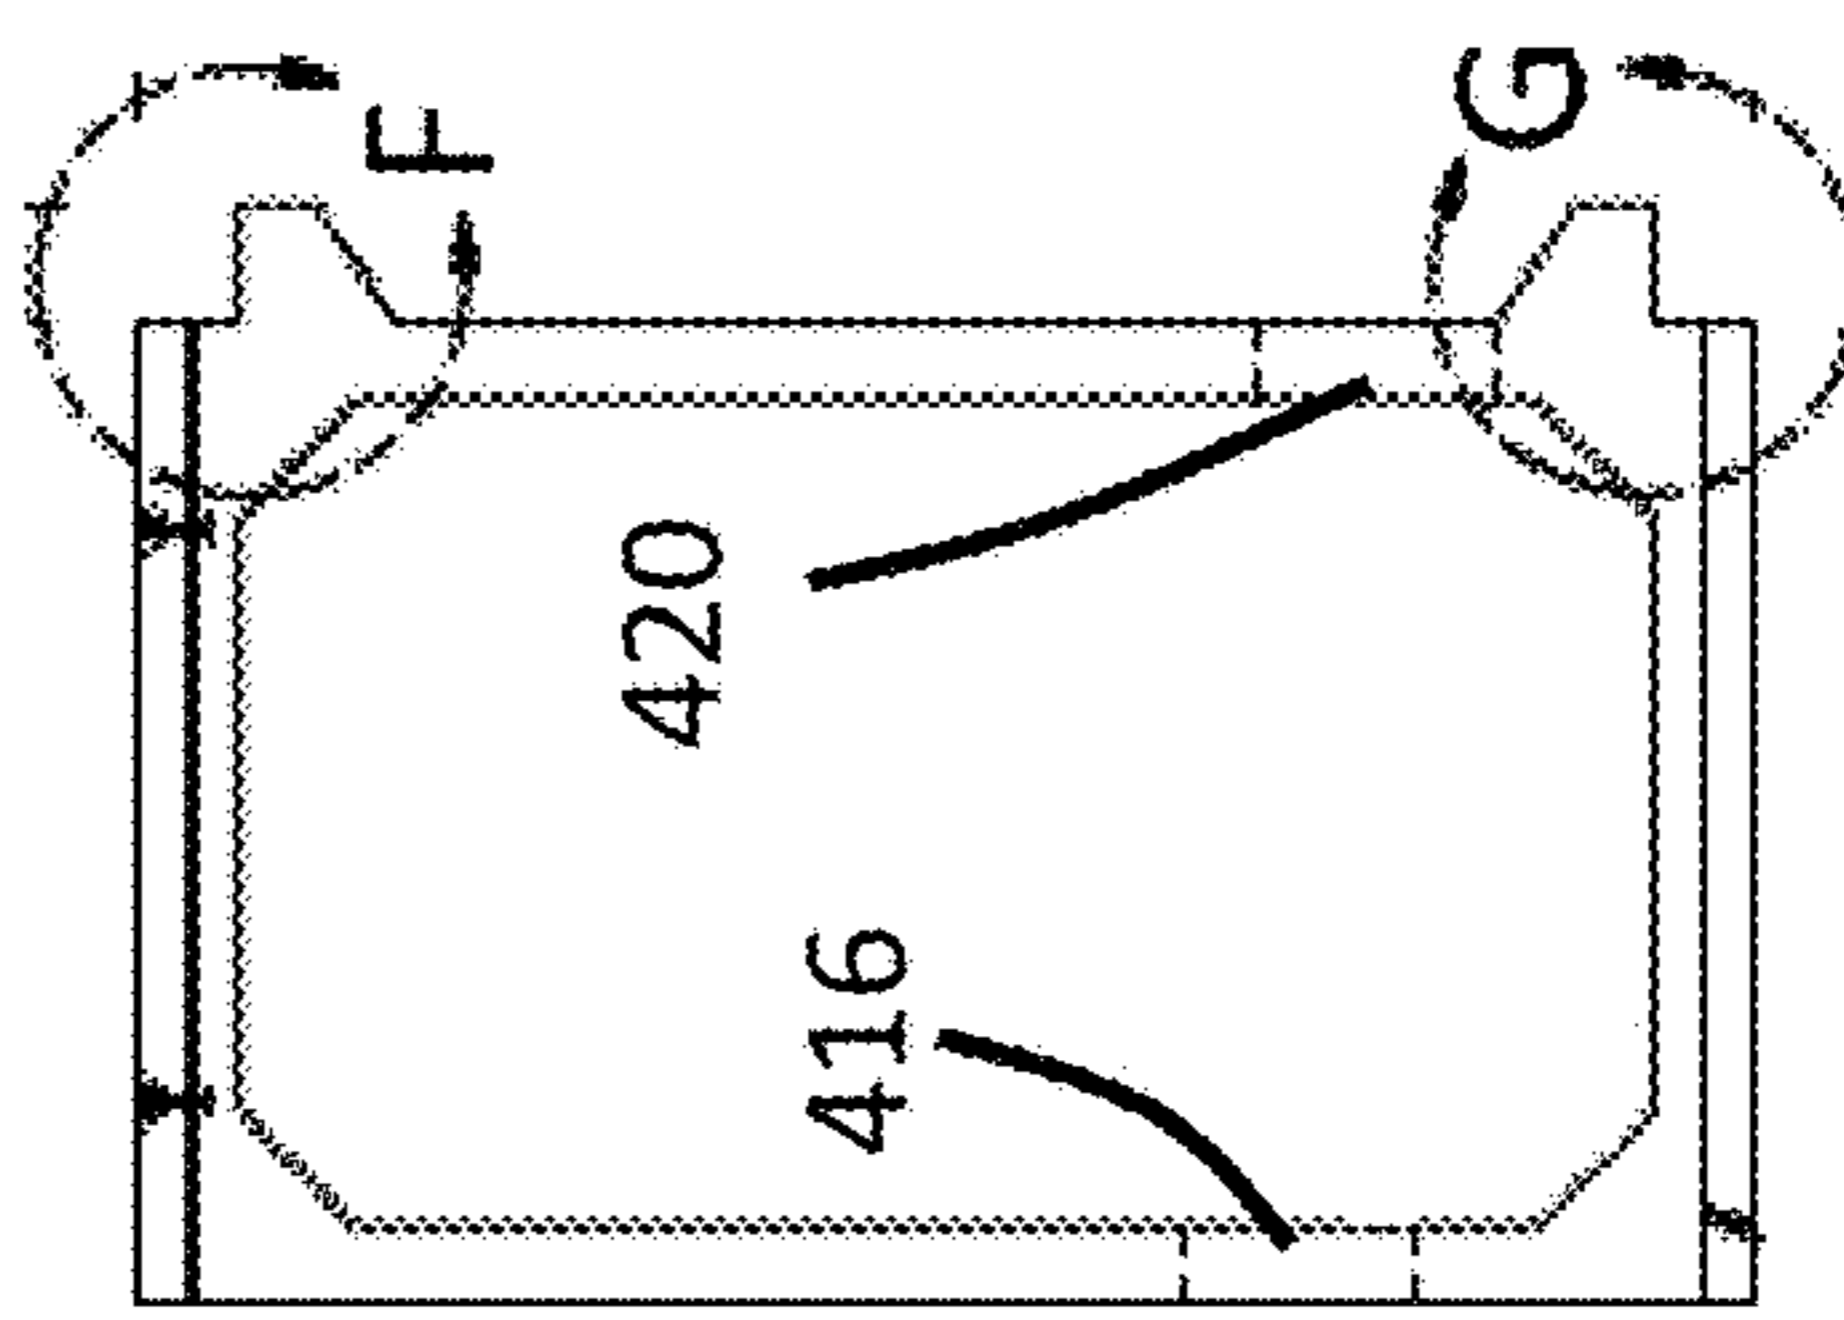


FIG. 10D

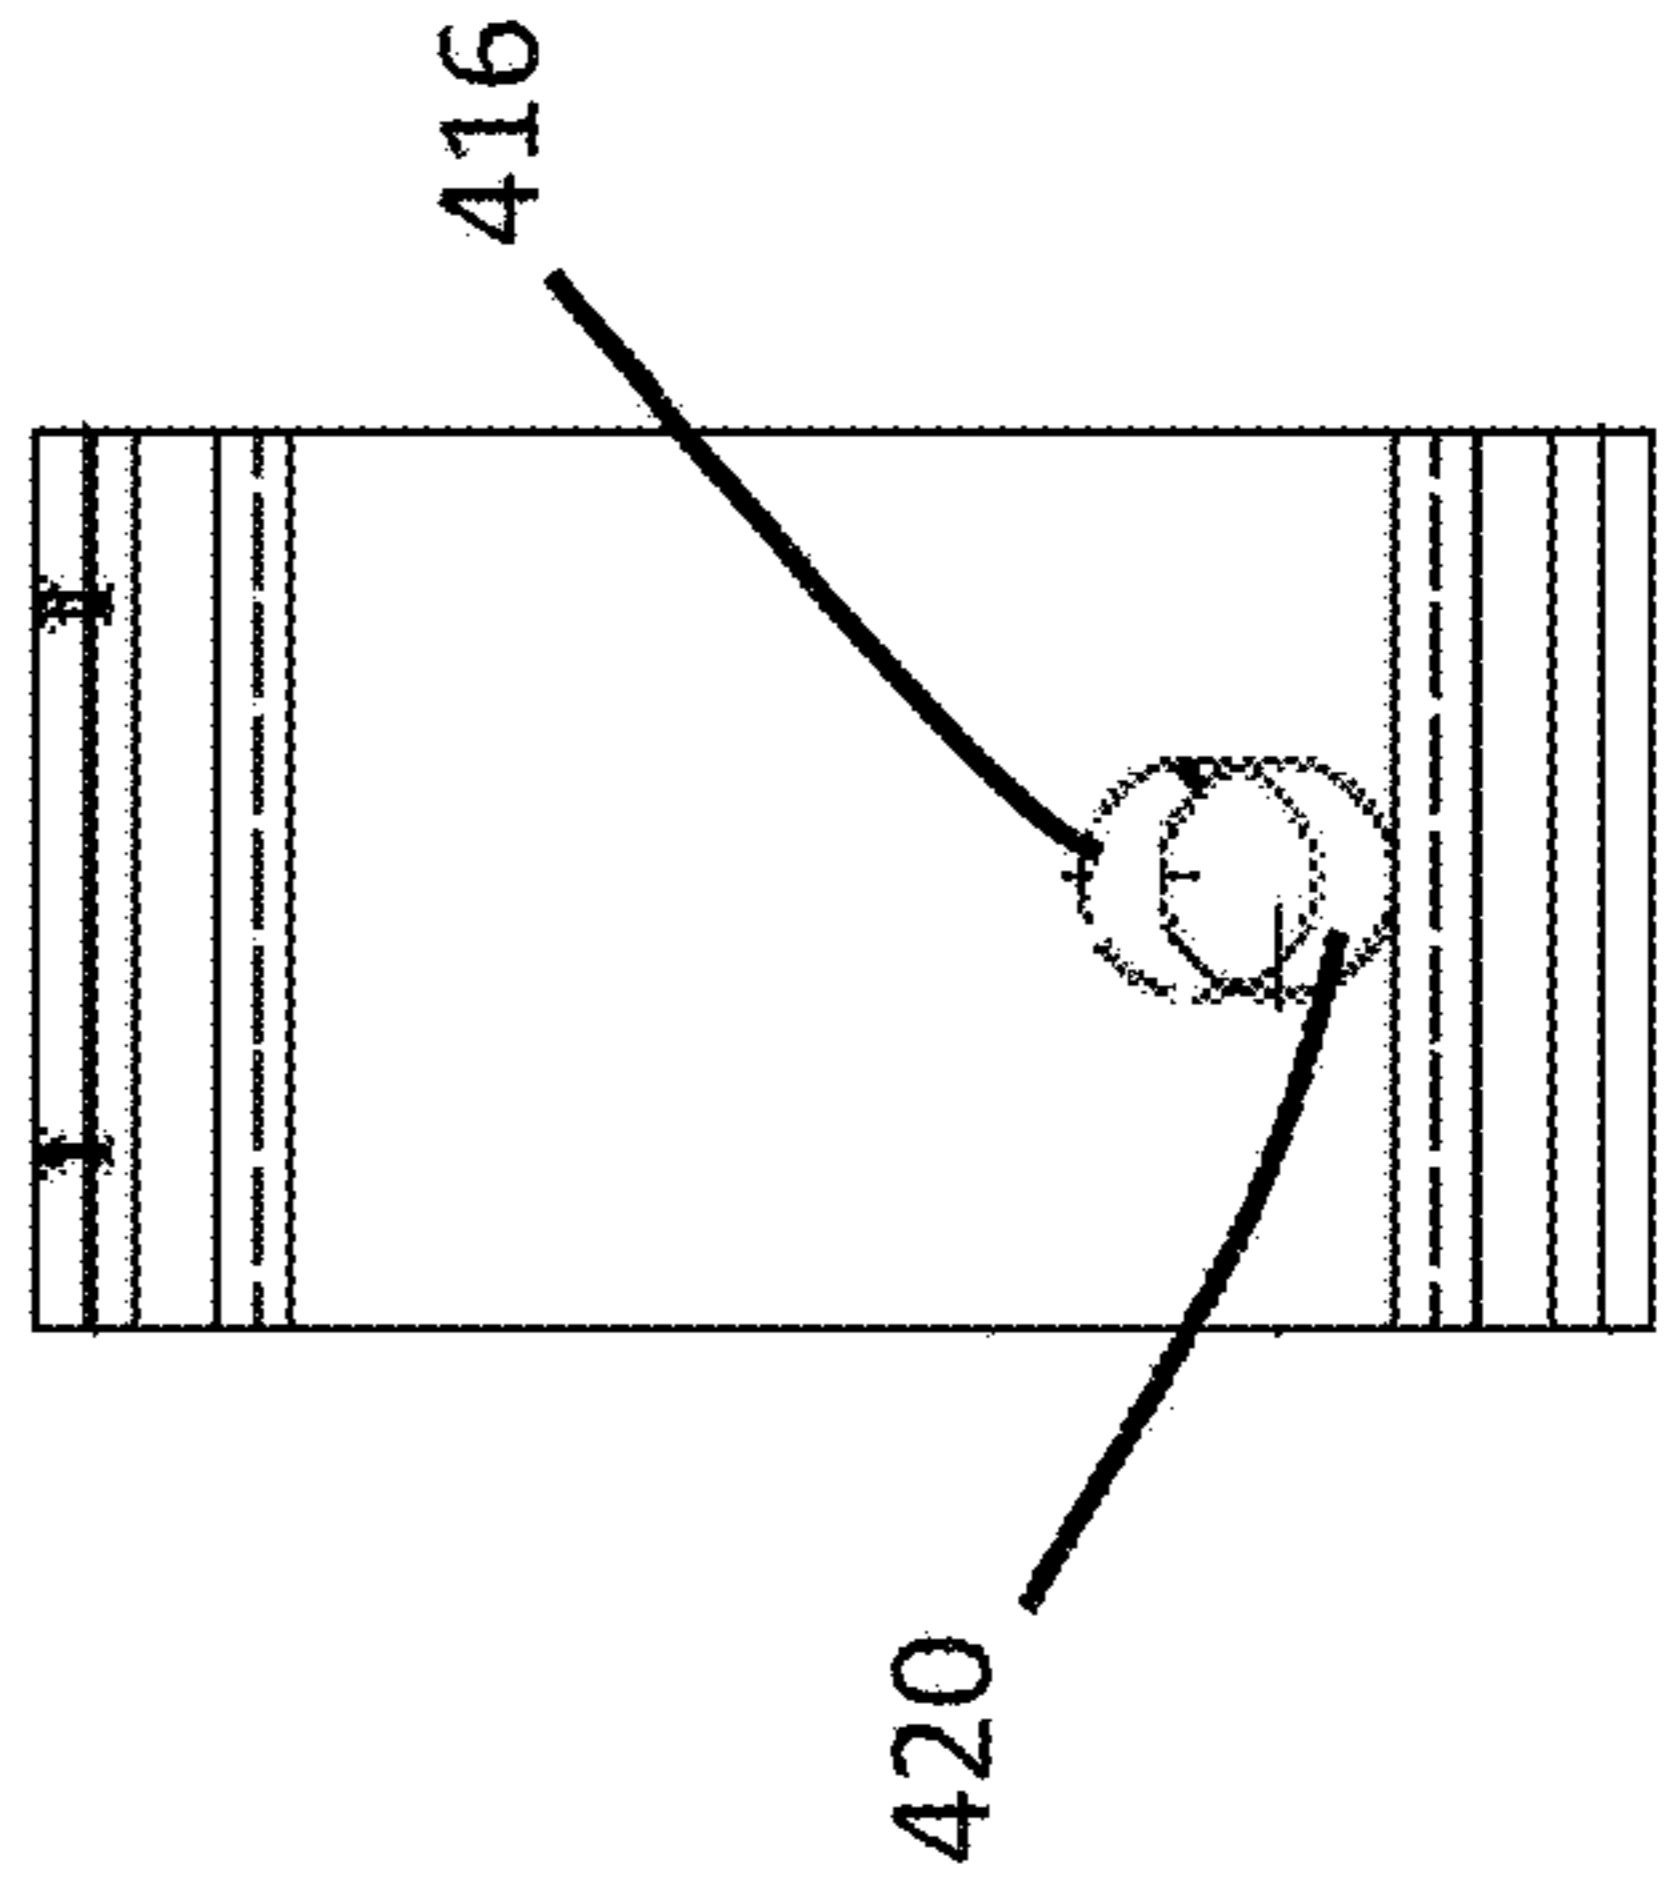


FIG. 10E

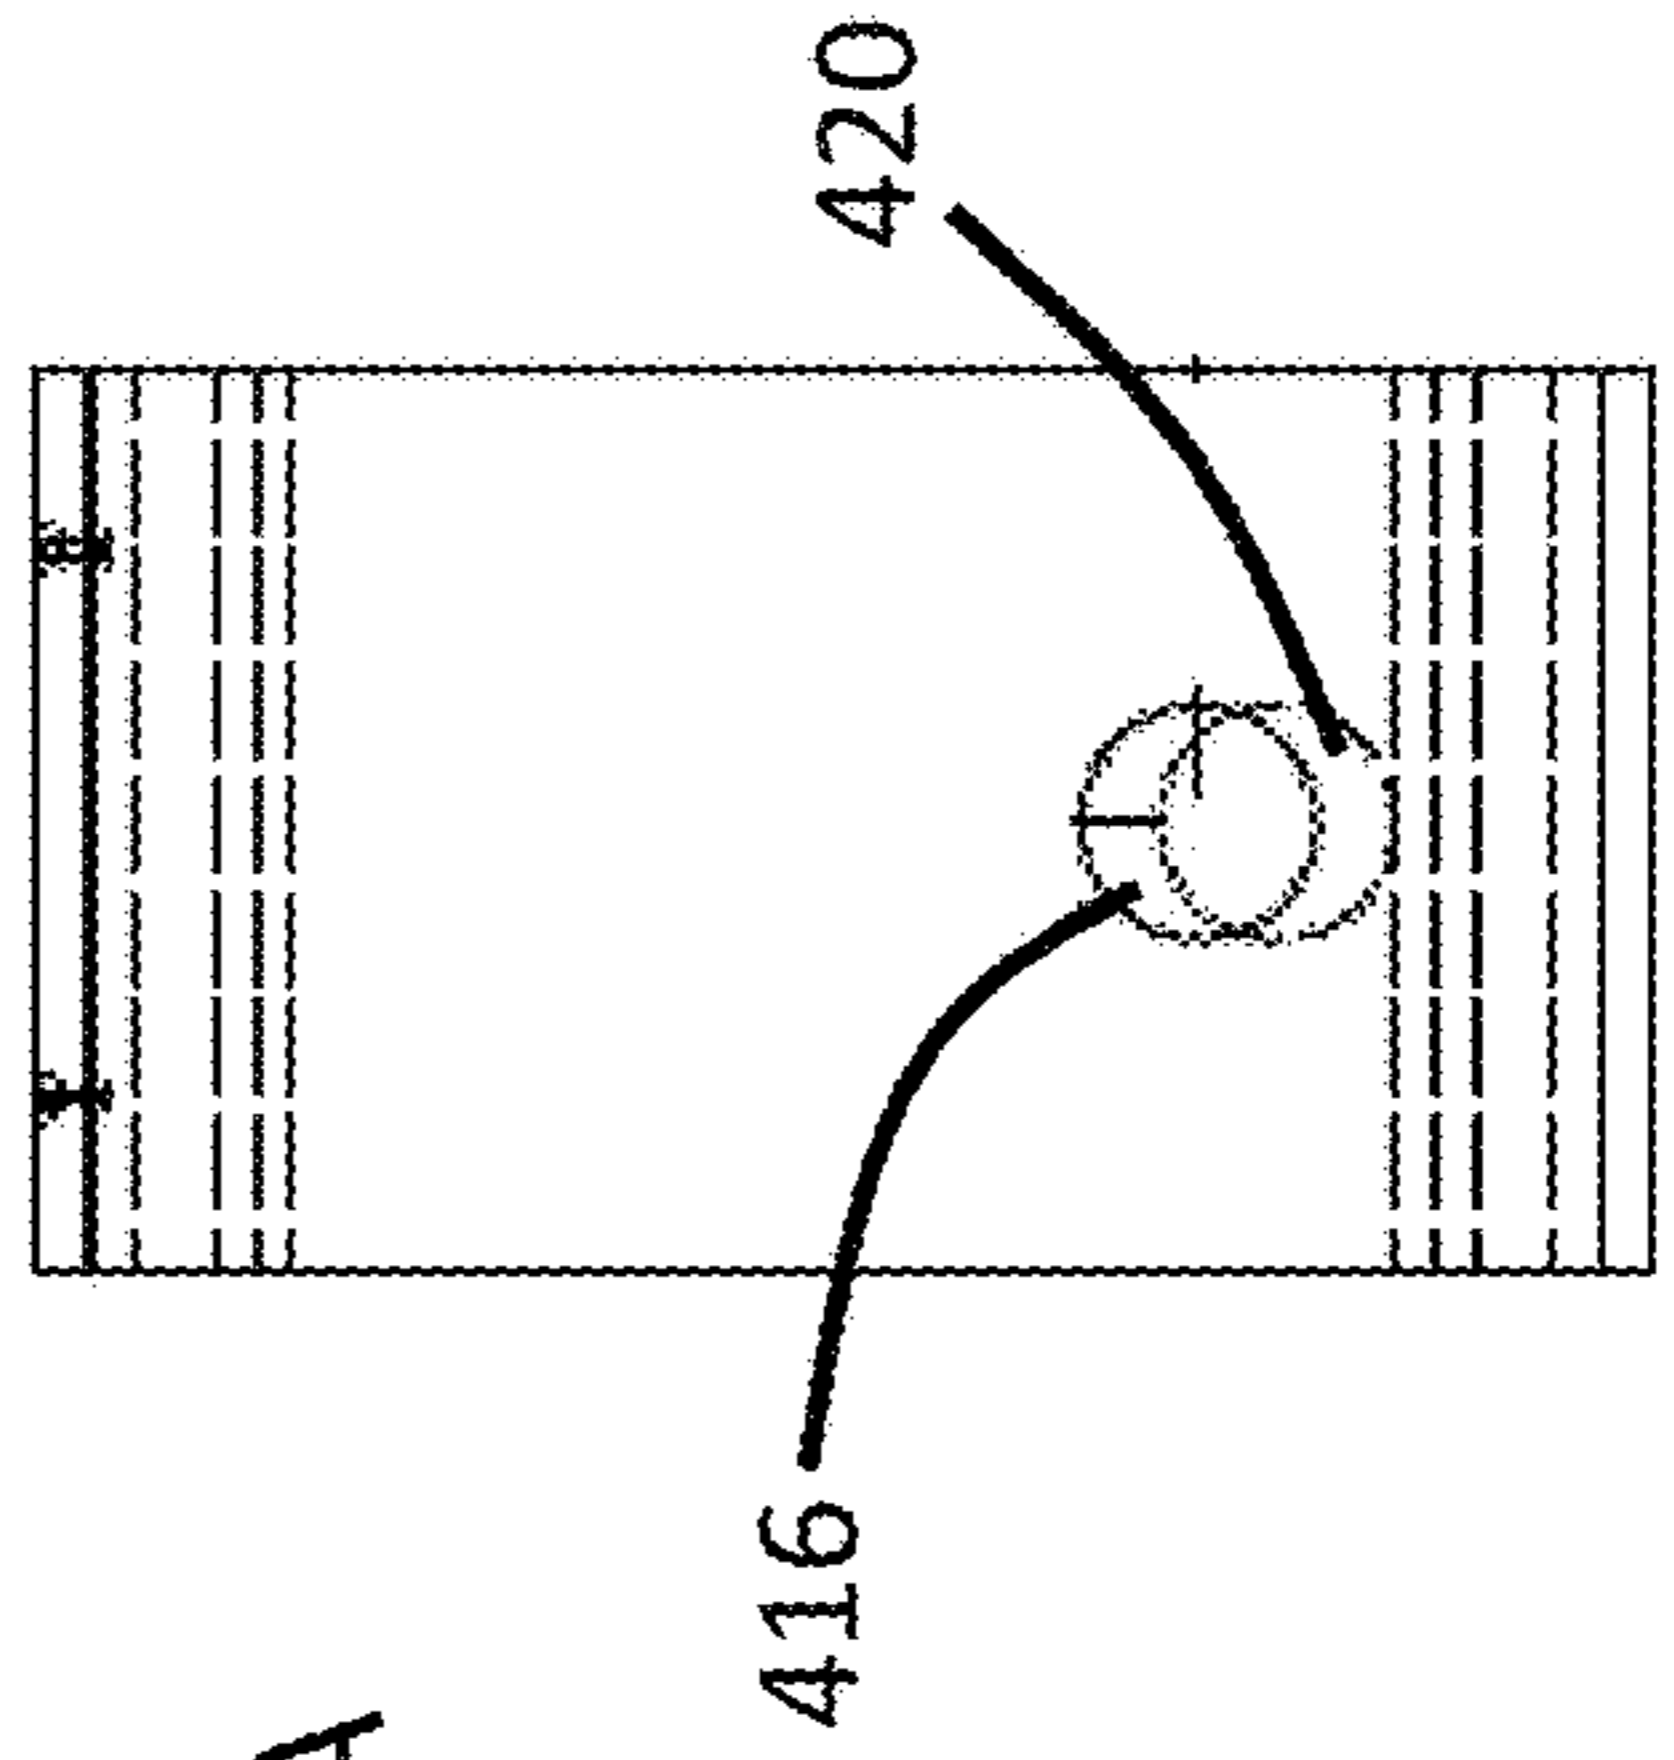


FIG. 10C

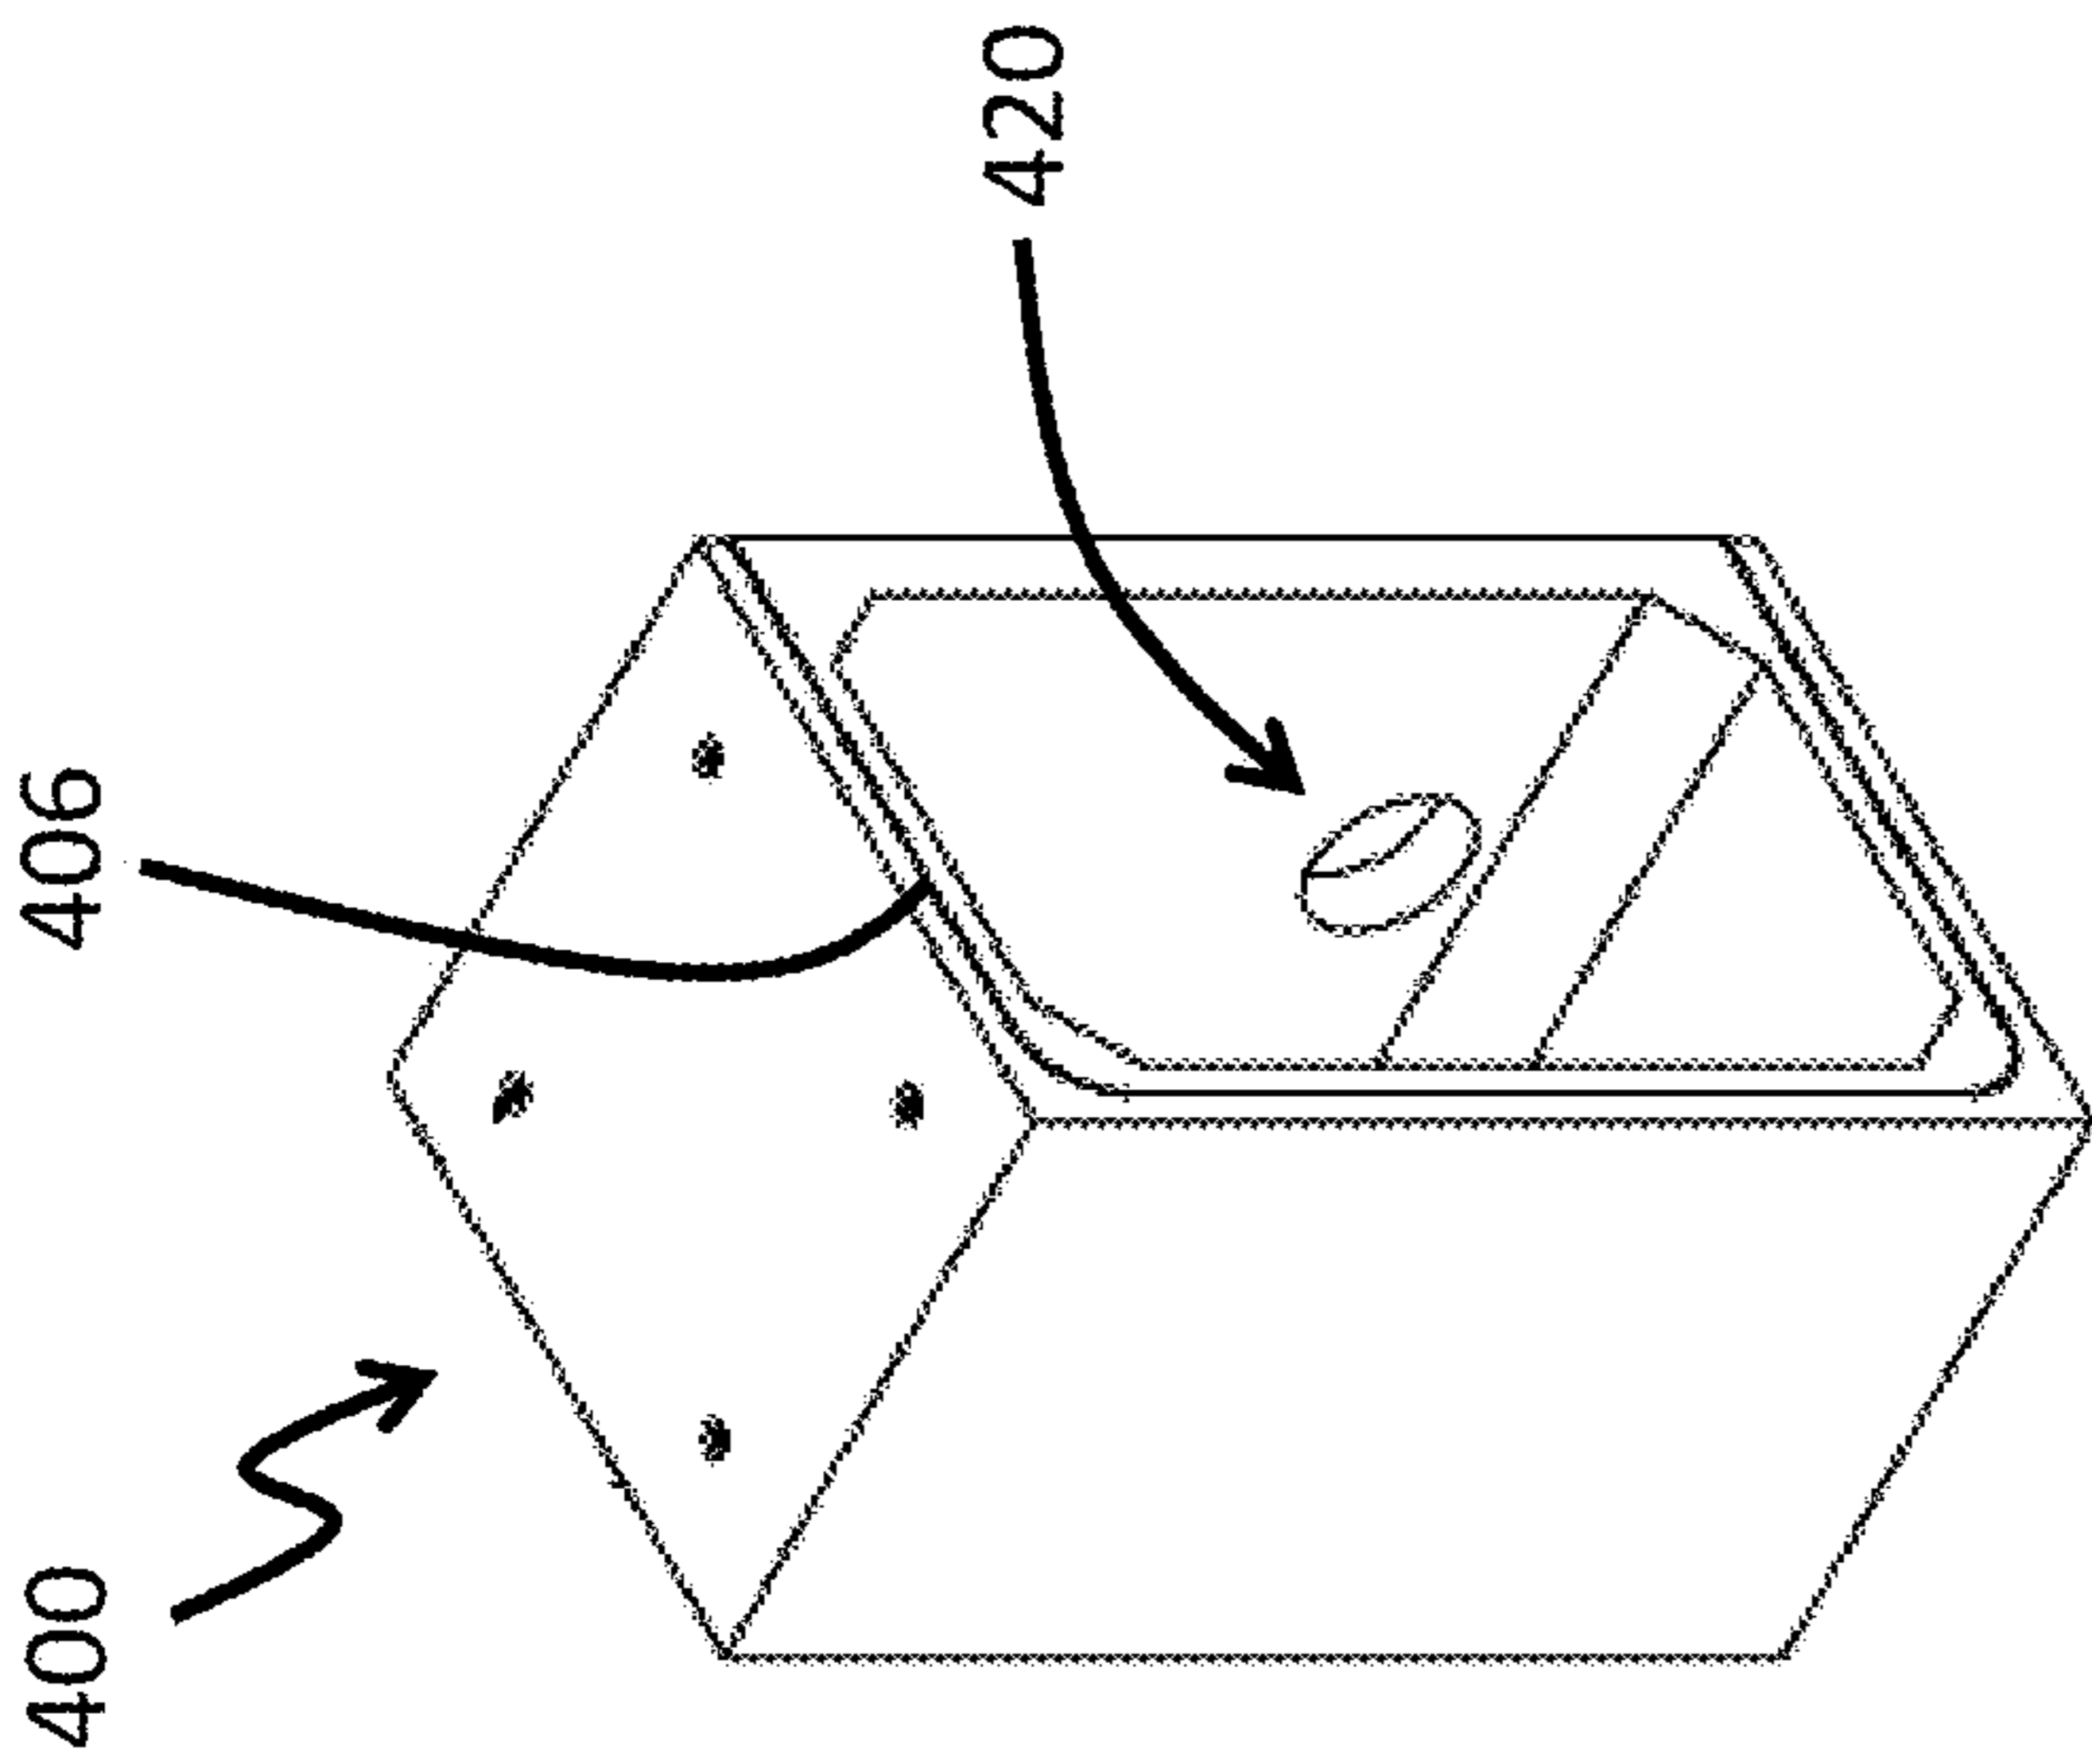


FIG. 11A

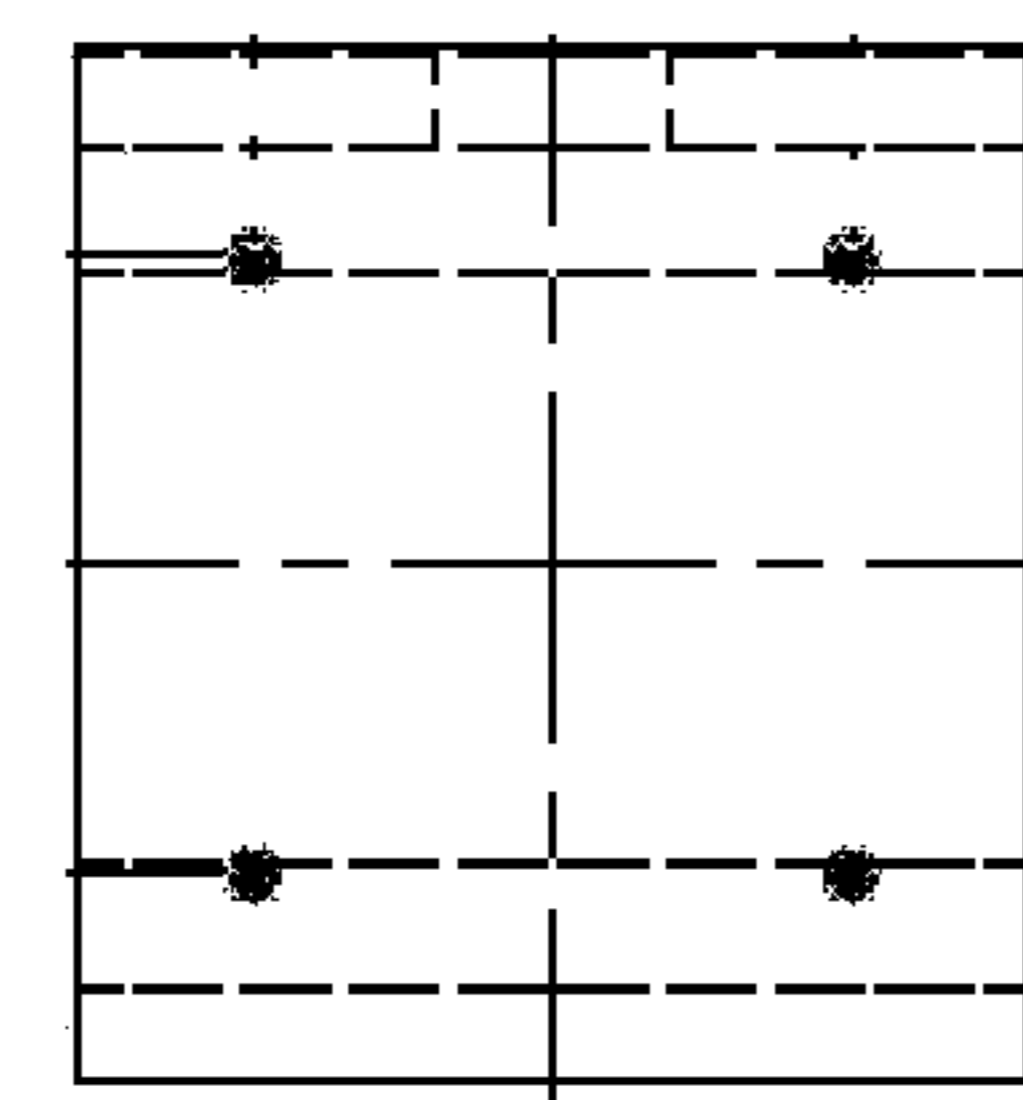


FIG. 11B

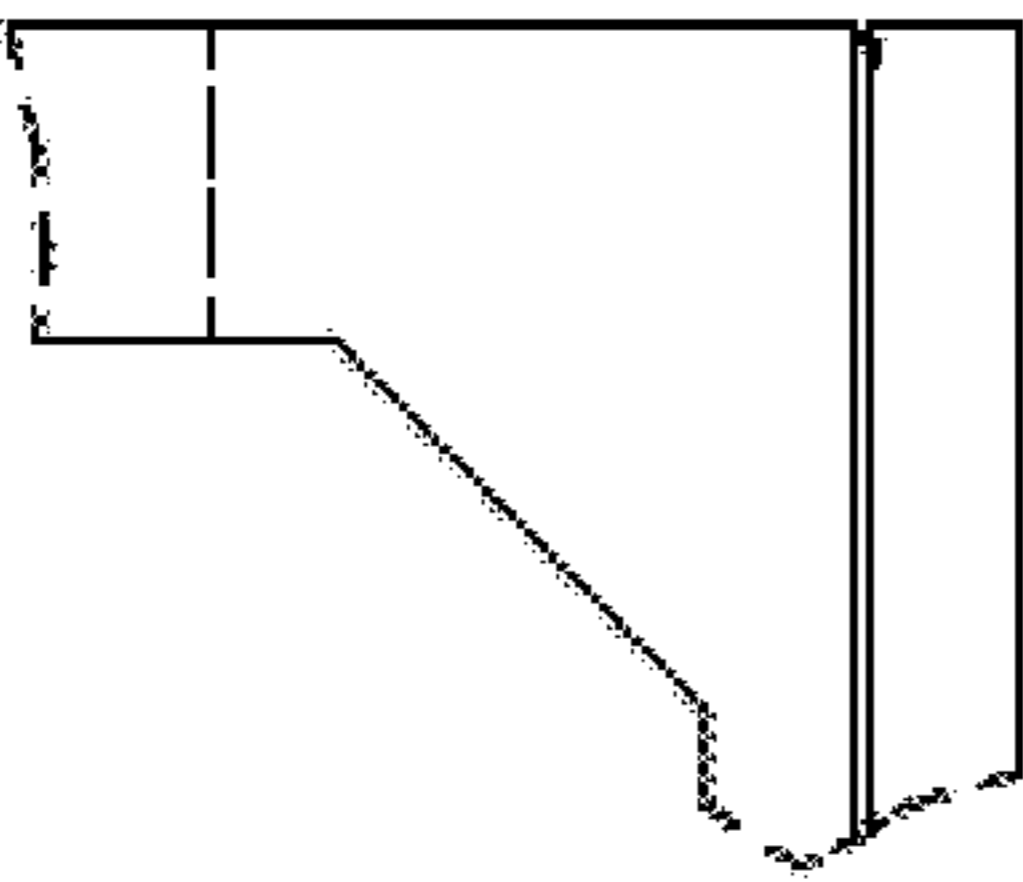


FIG. 11G

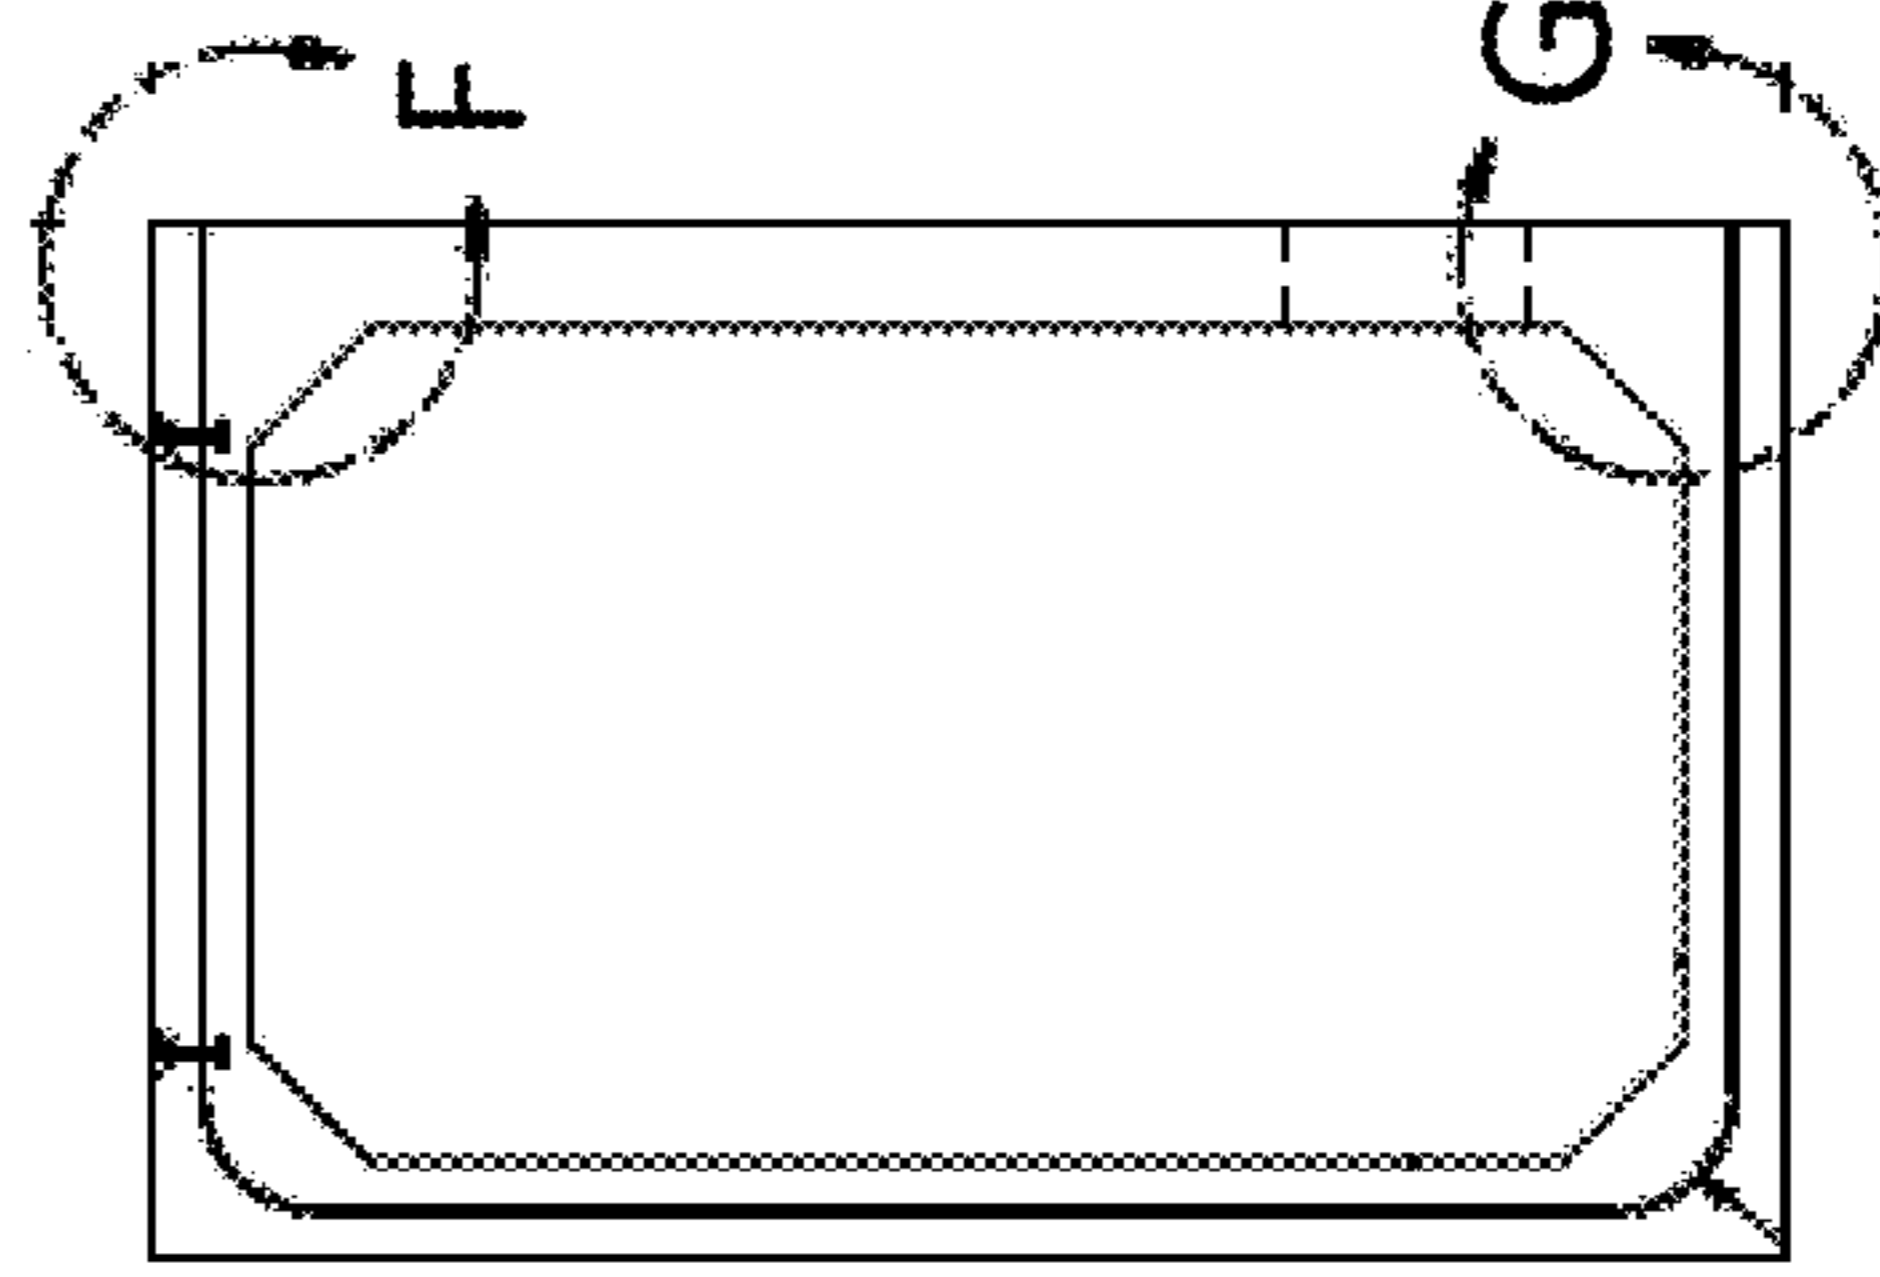


FIG. 11C

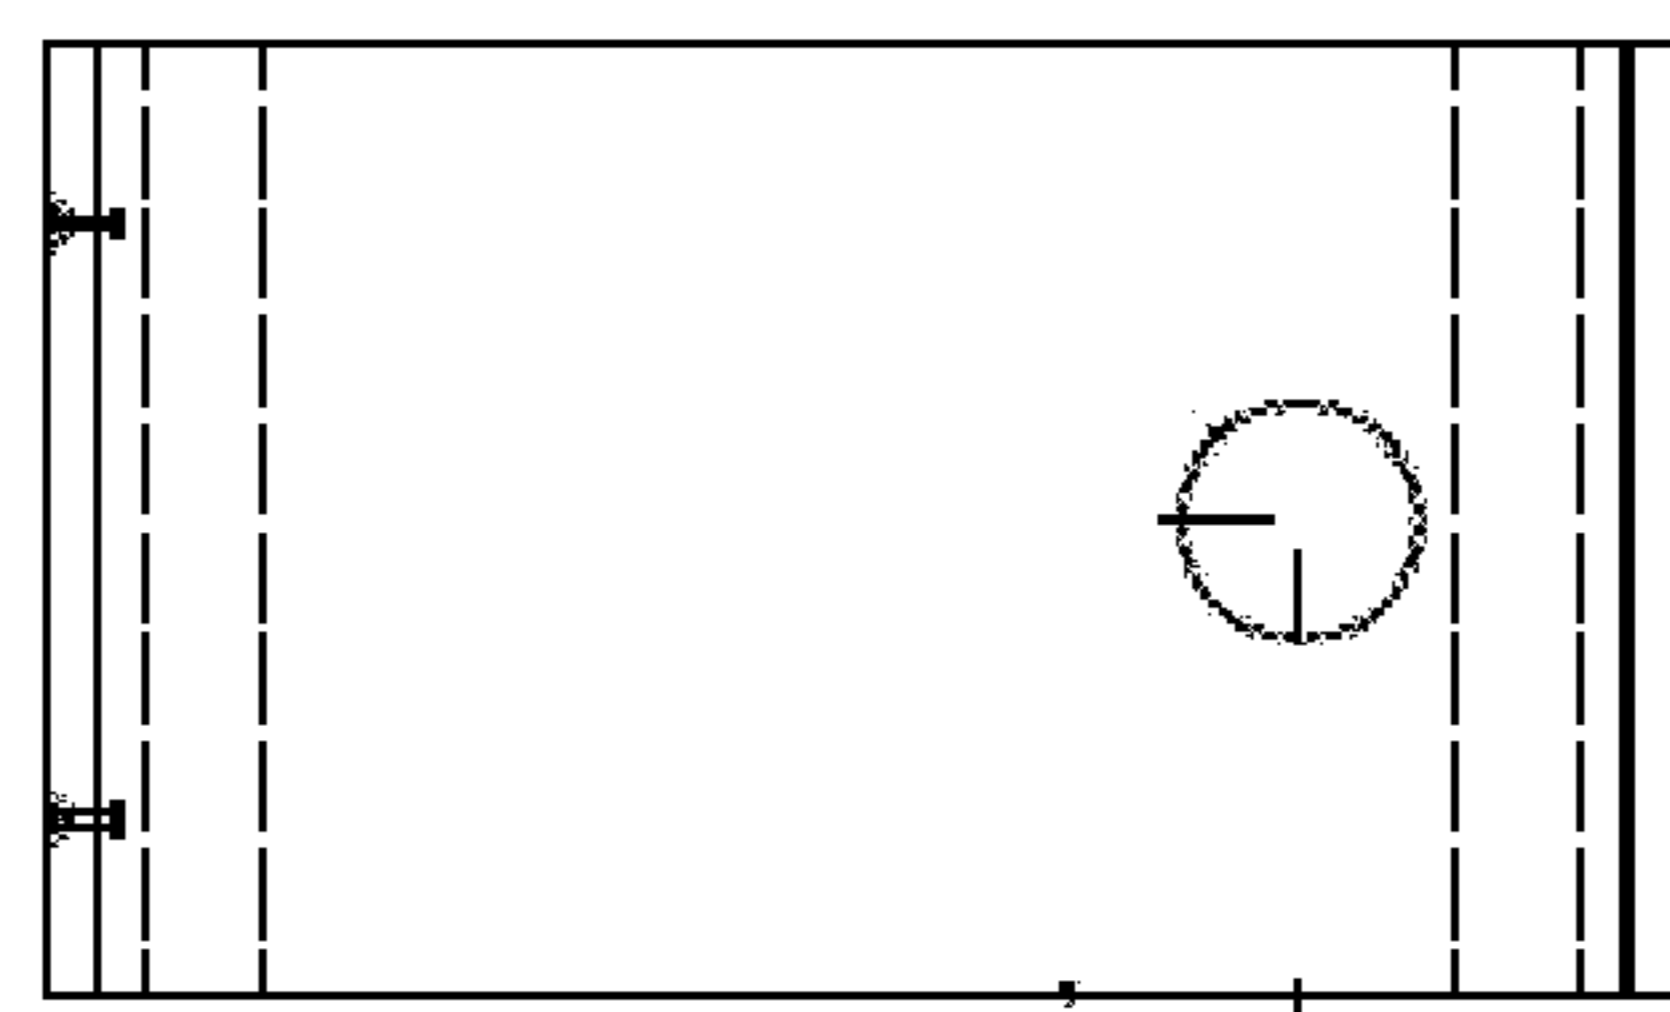


FIG. 11D

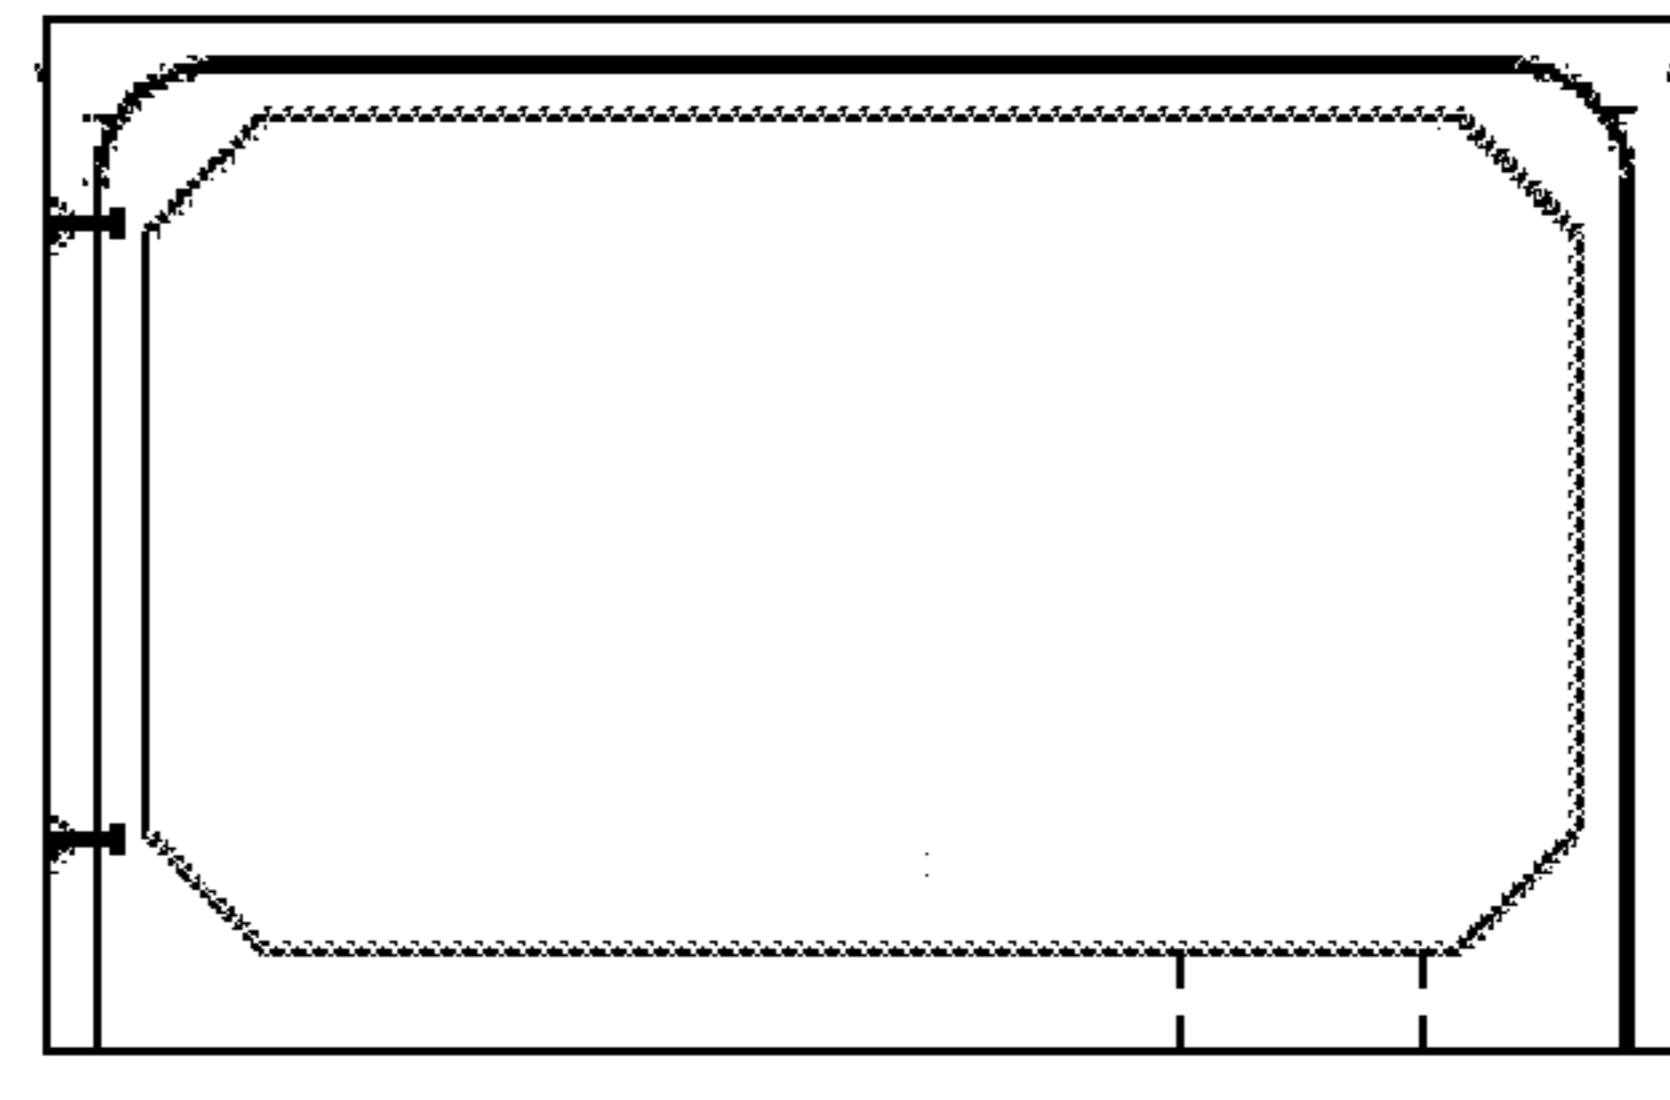


FIG. 11E

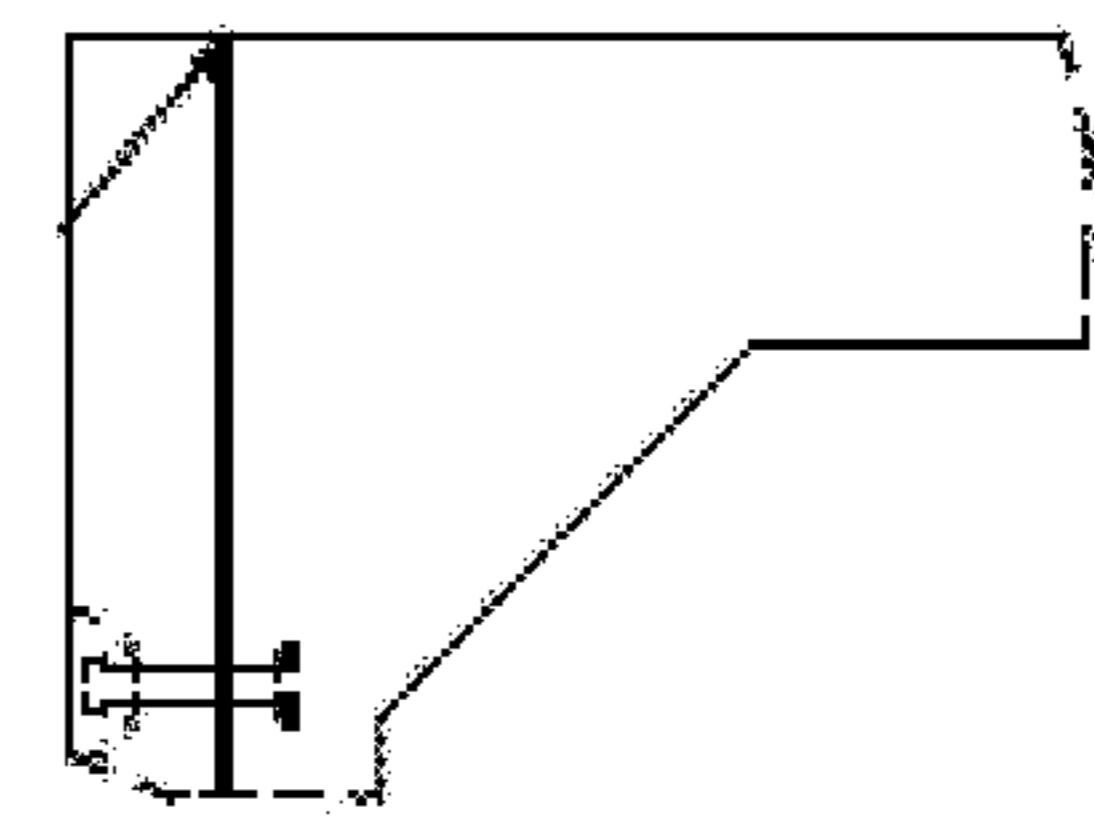


FIG. 11F

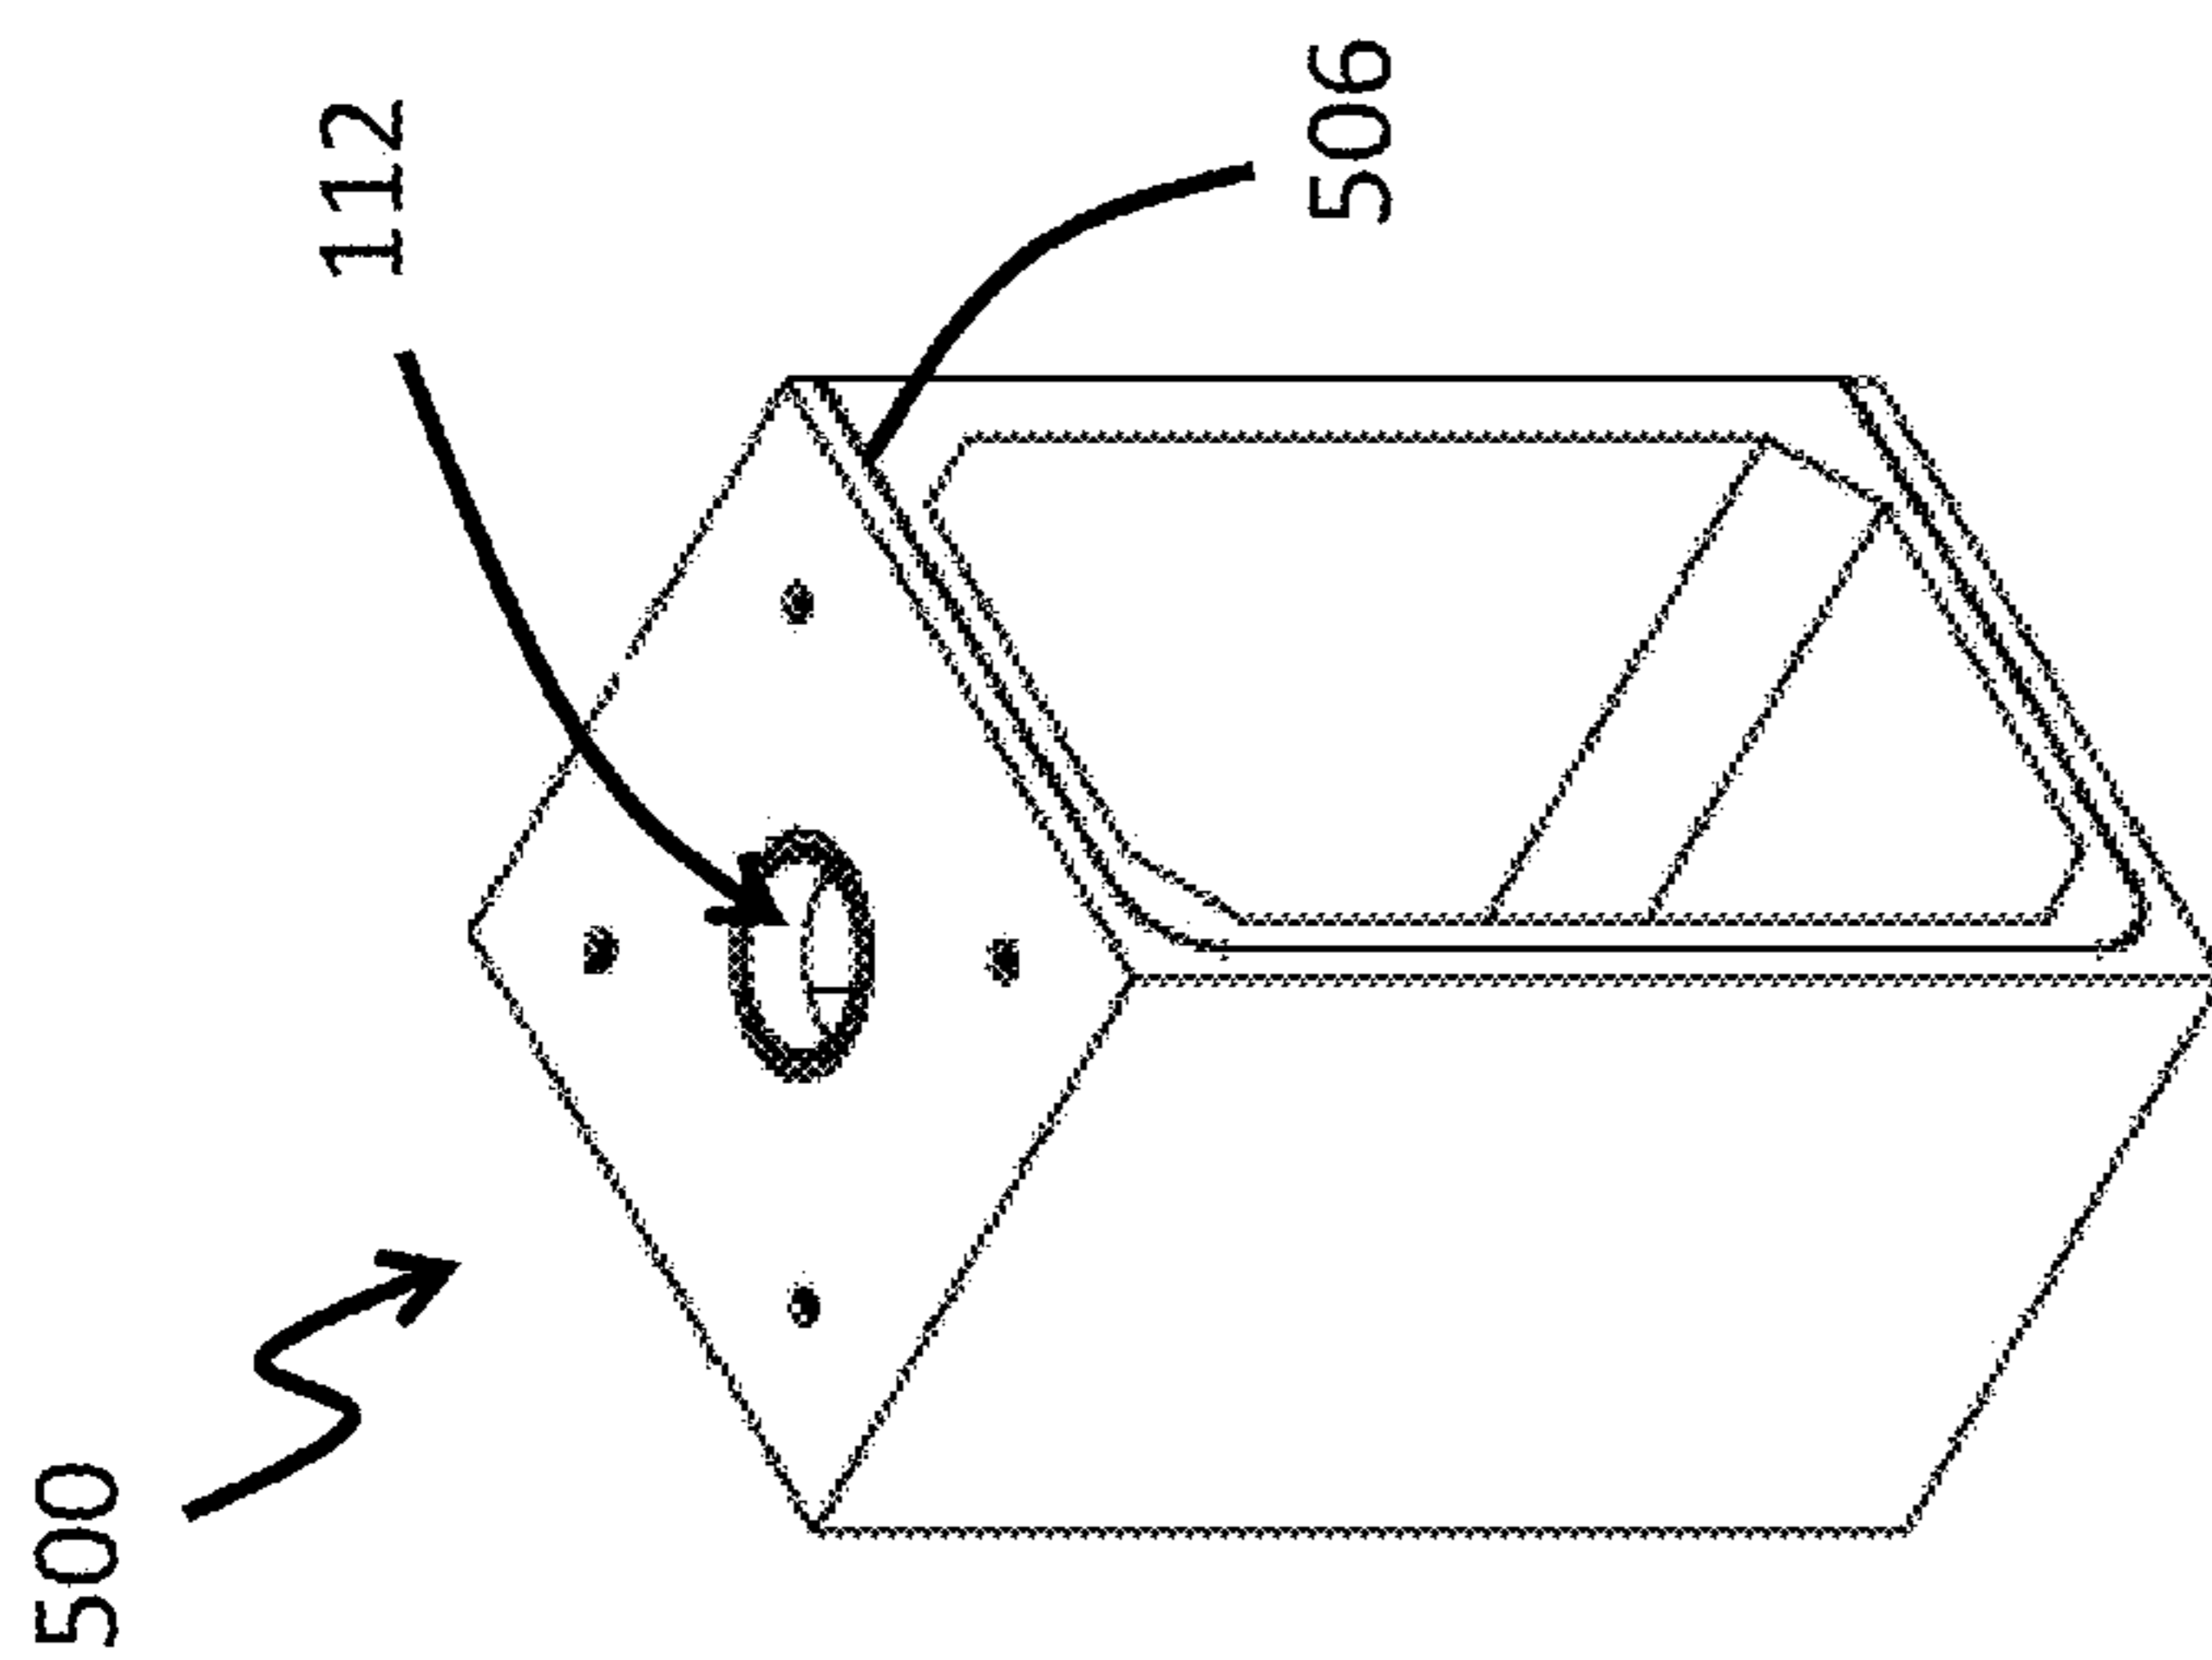


FIG. 12A

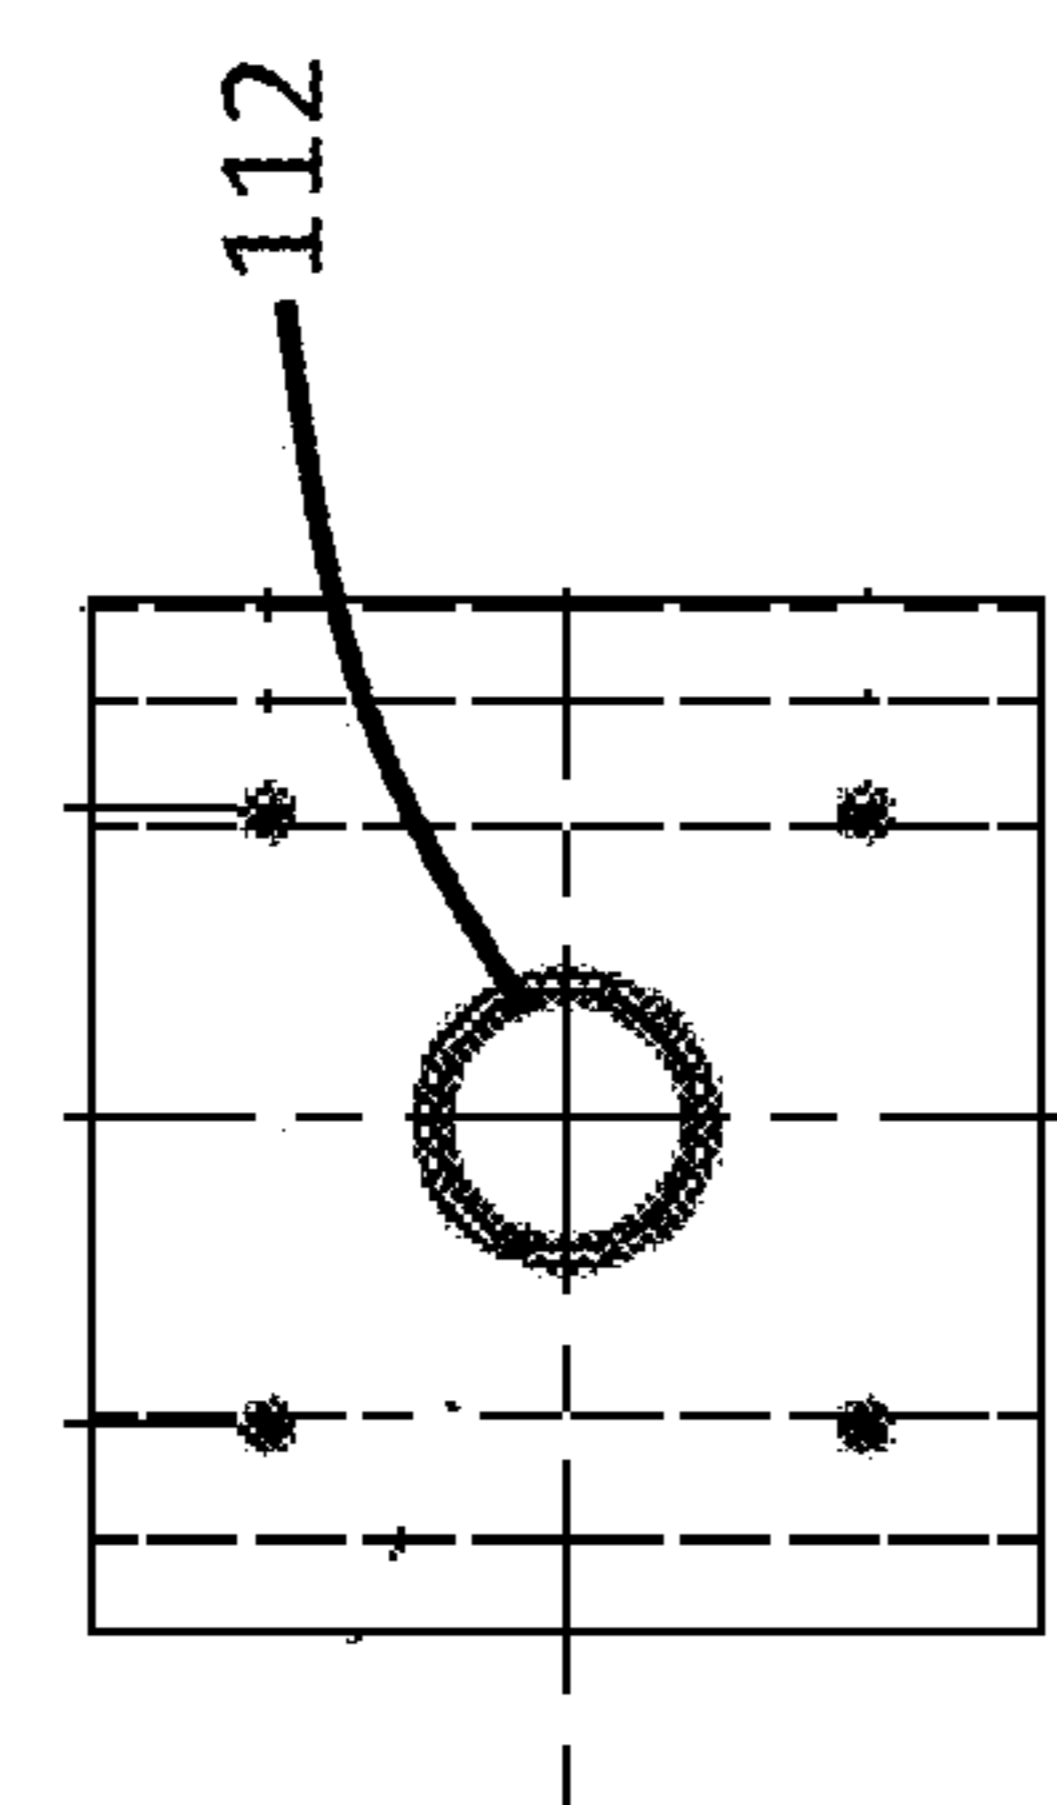


FIG. 12B

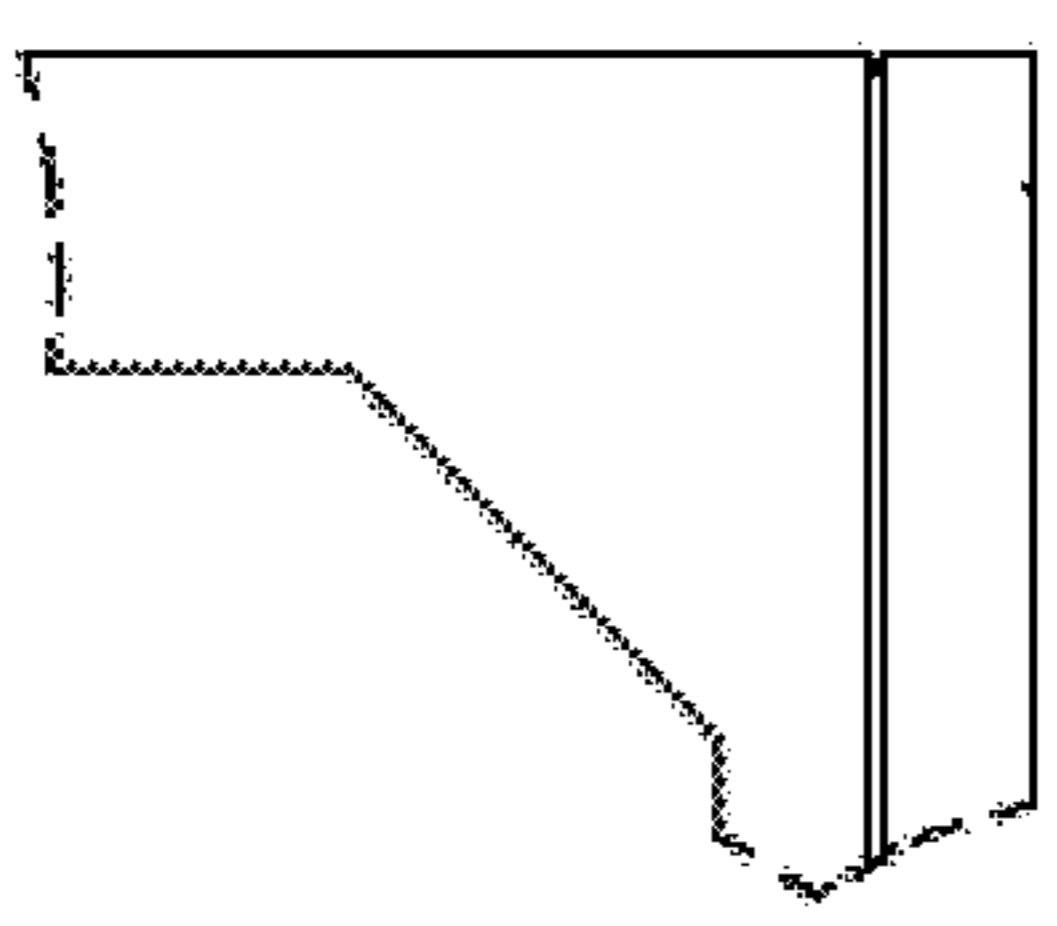


FIG. 12G

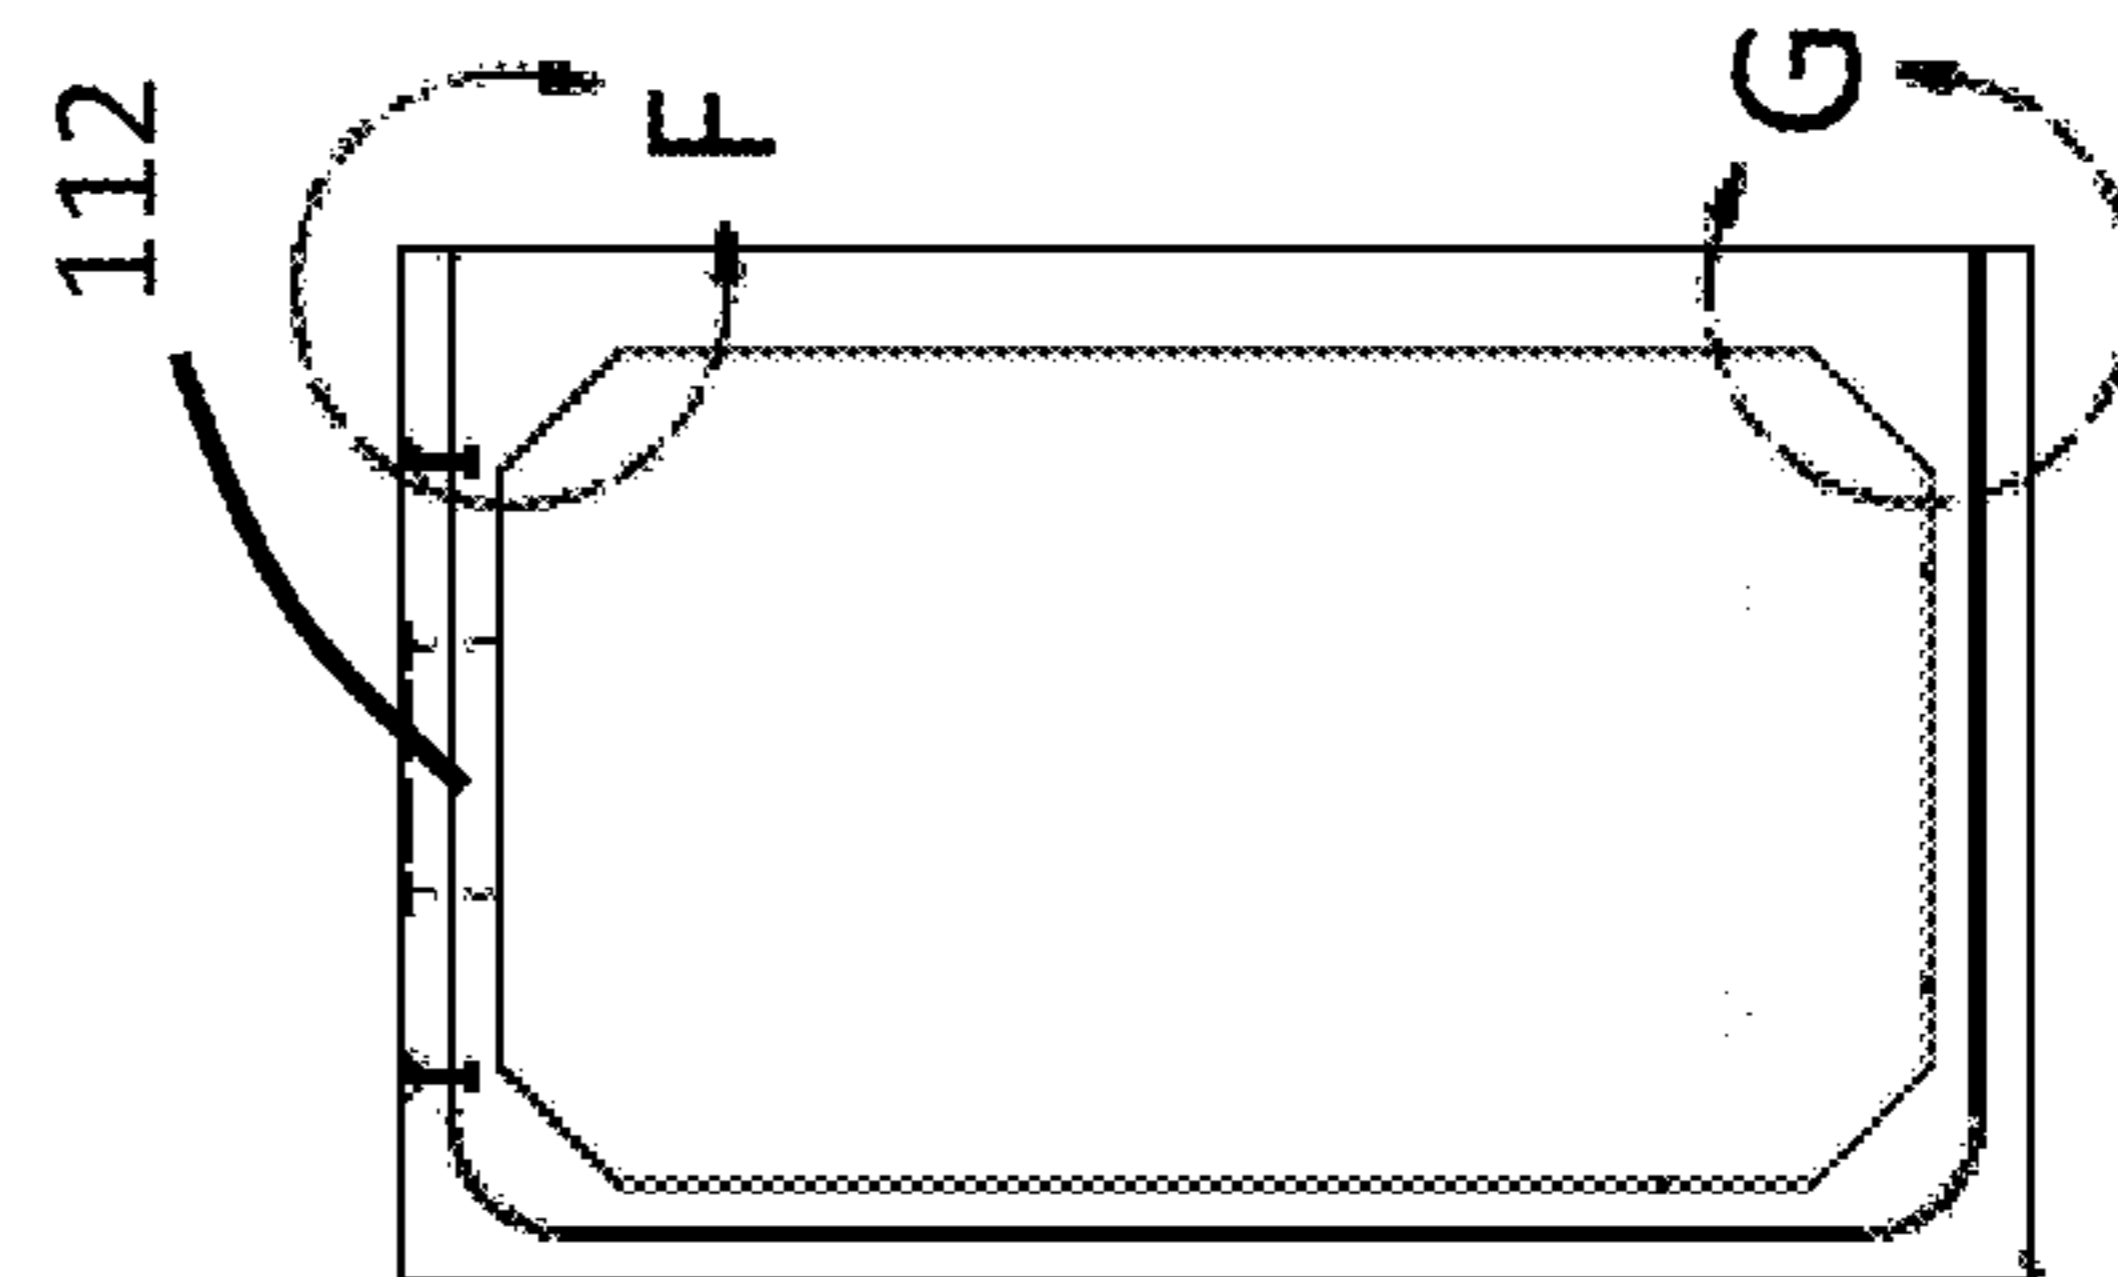


FIG. 12C

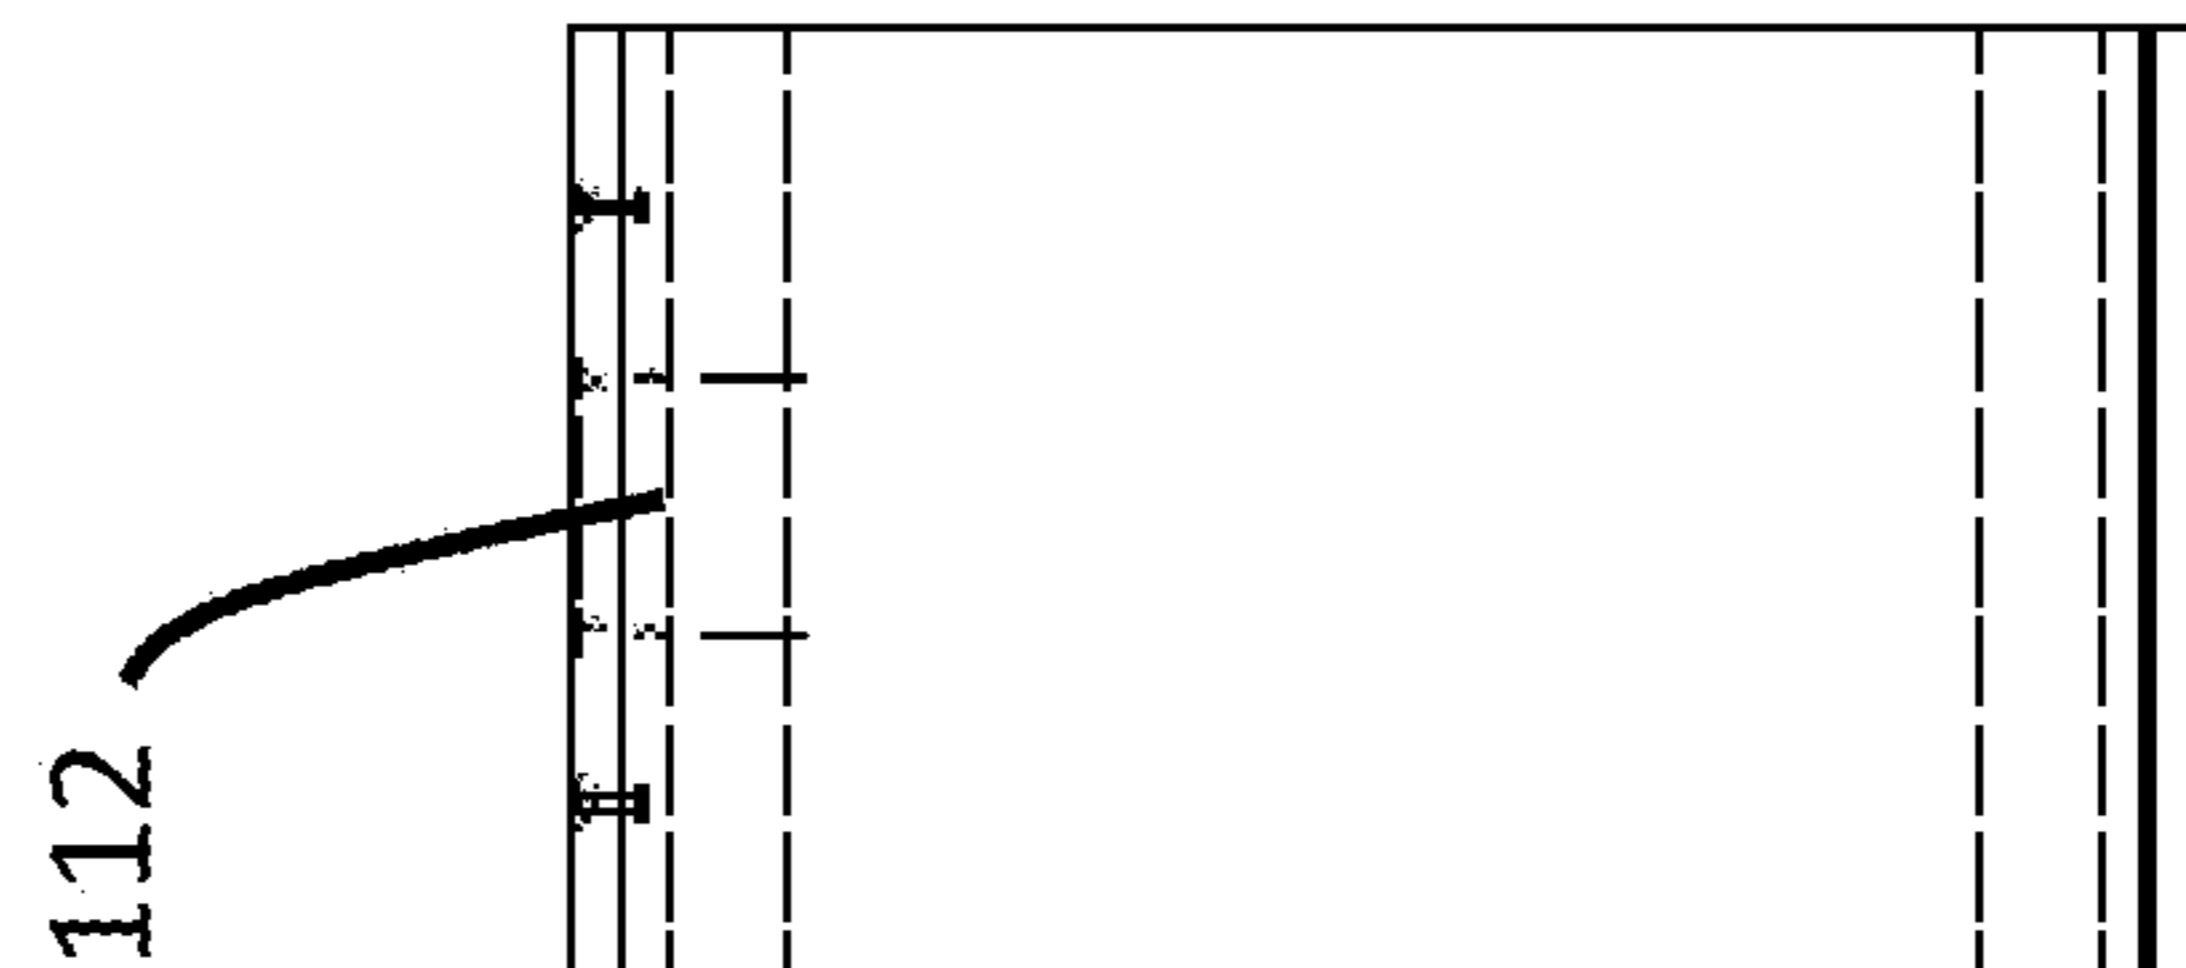


FIG. 12D

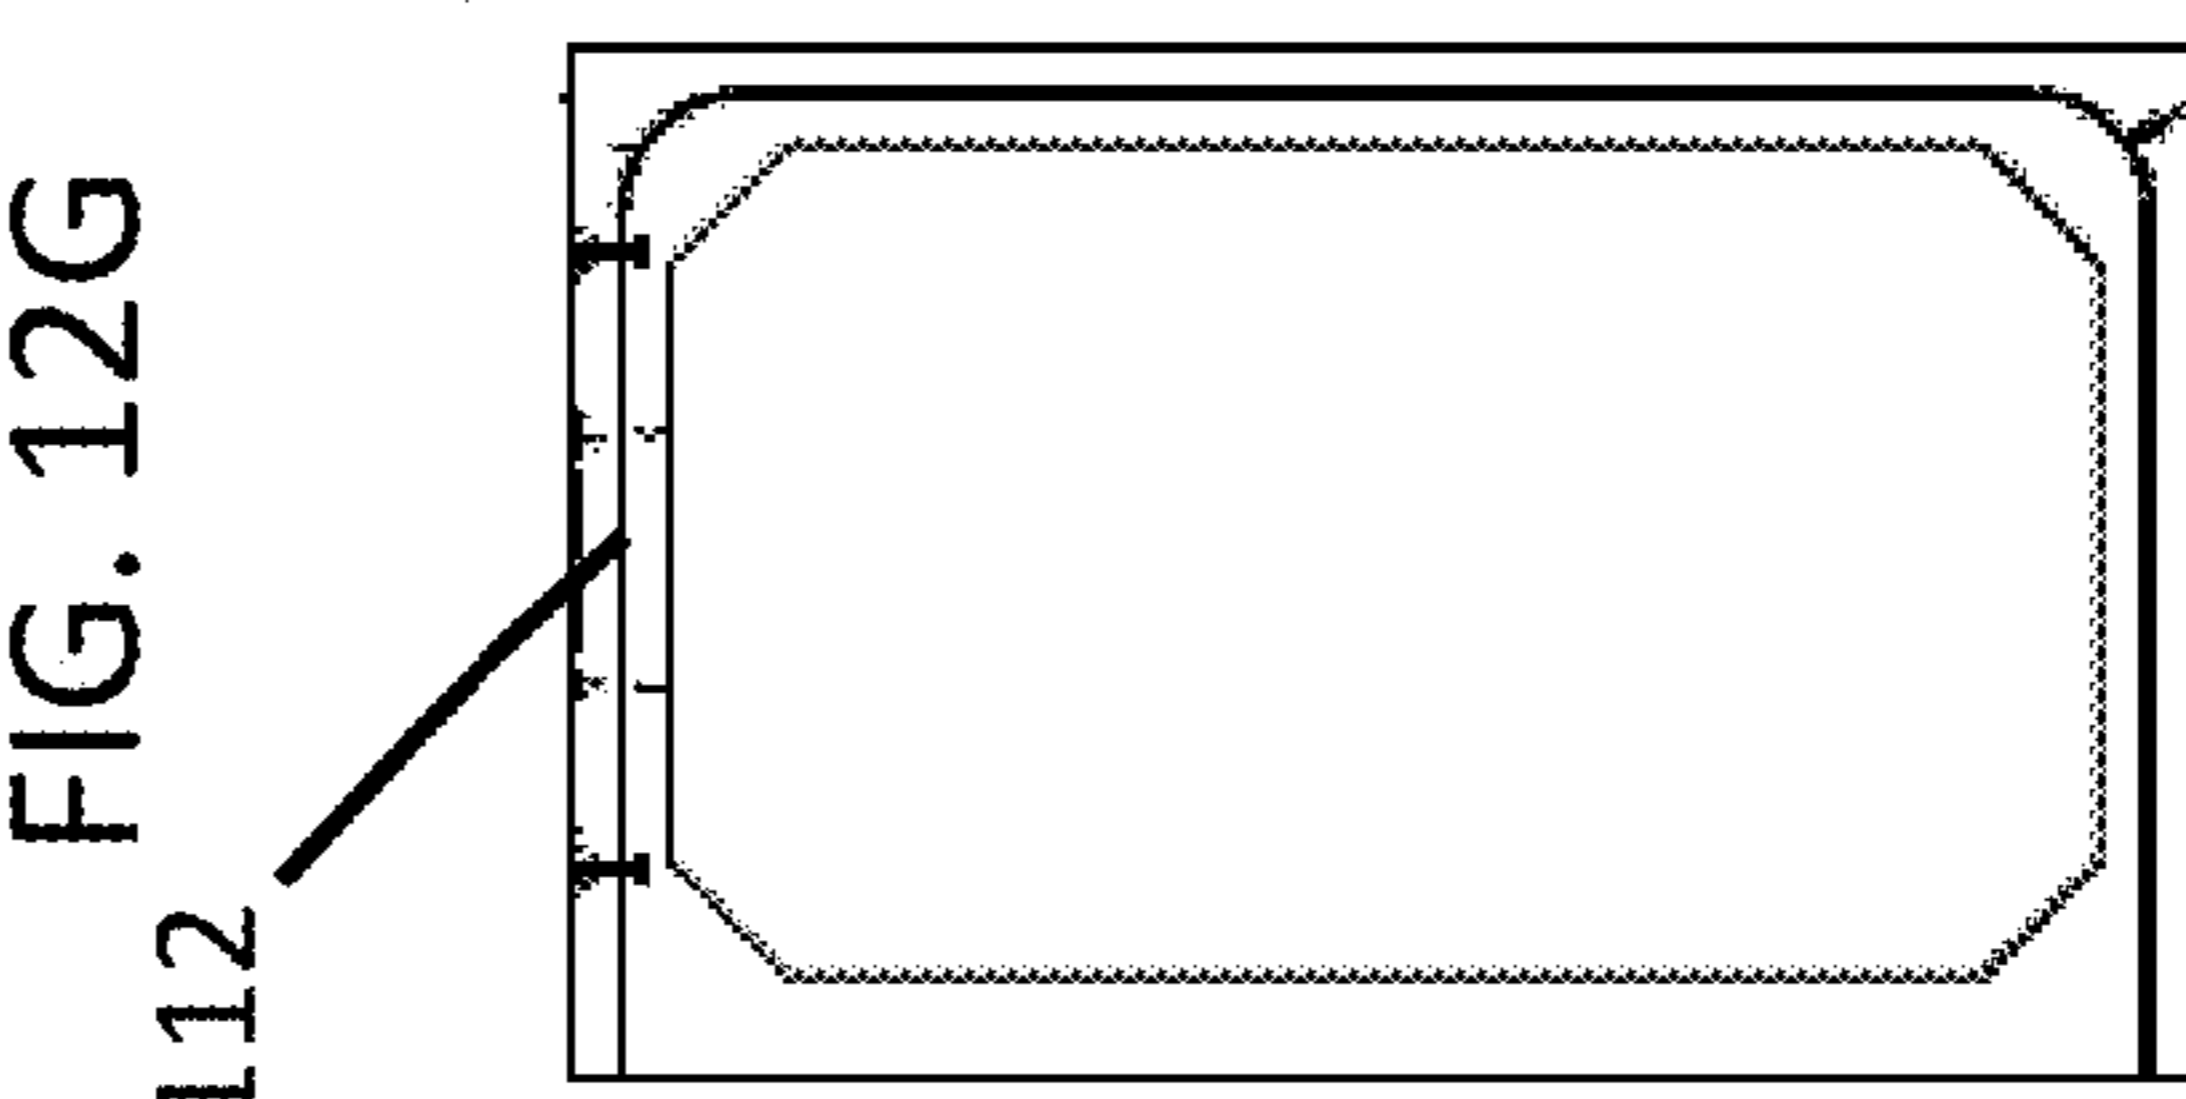


FIG. 12E

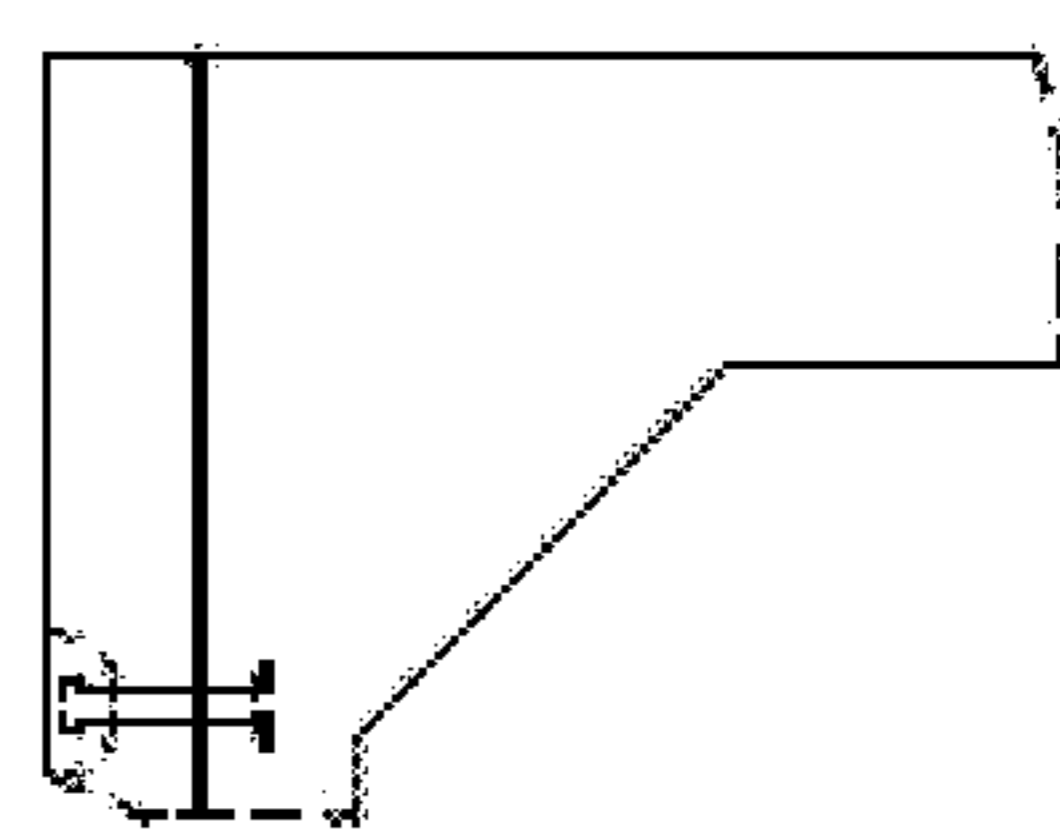


FIG. 12F

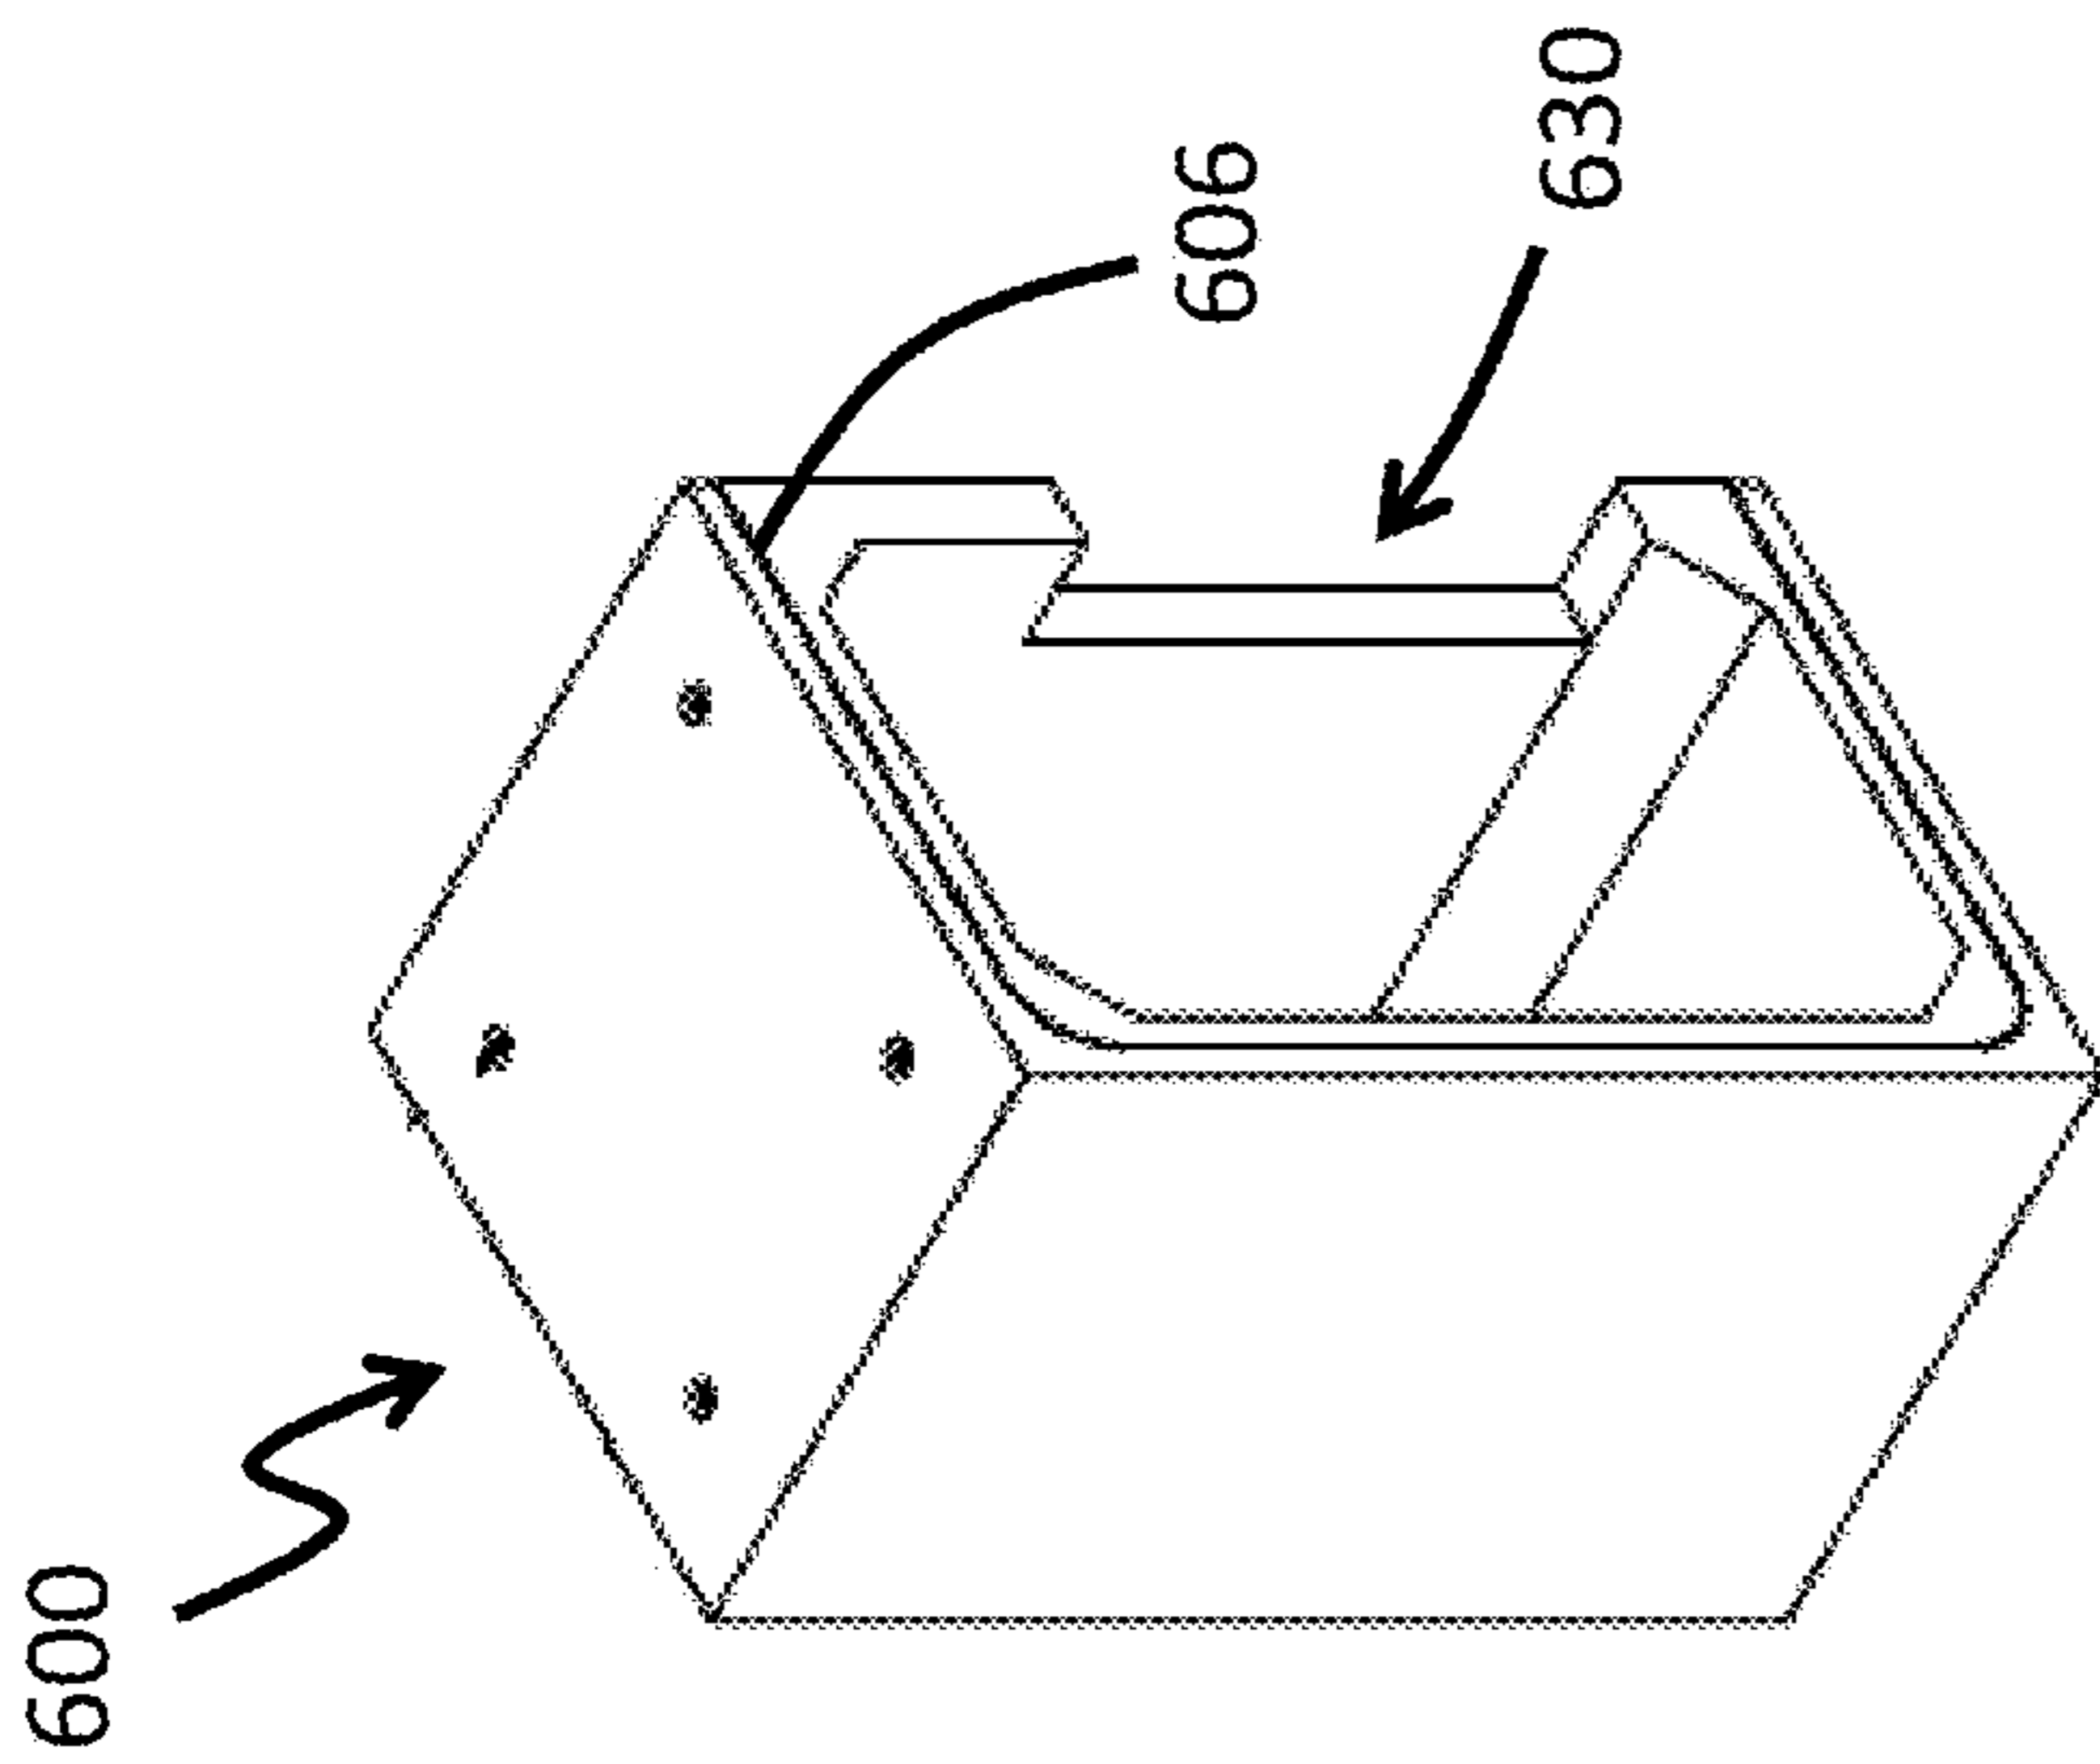


FIG. 13A

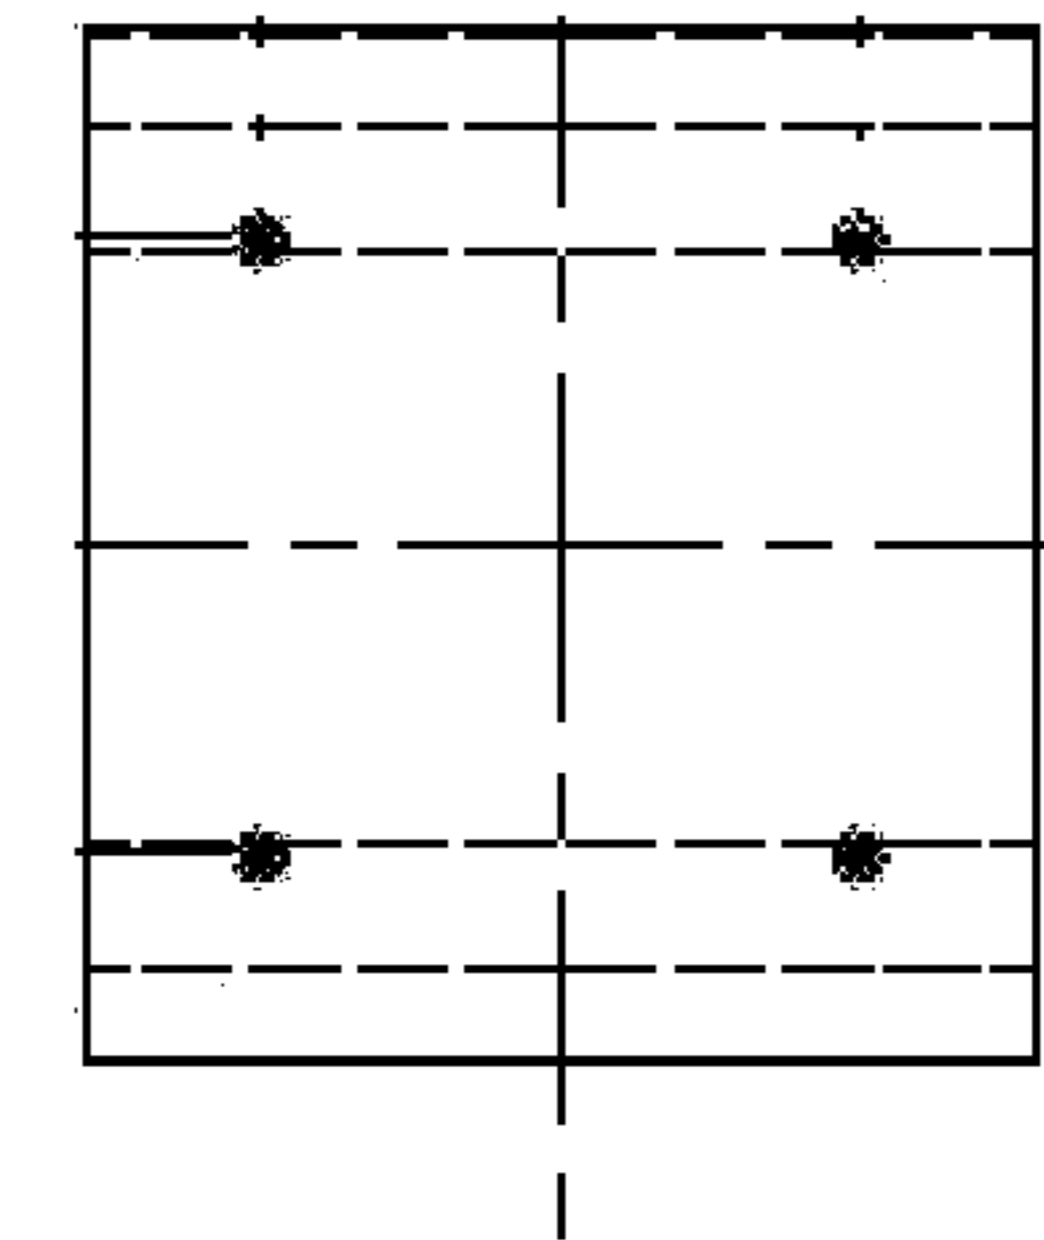


FIG. 13B

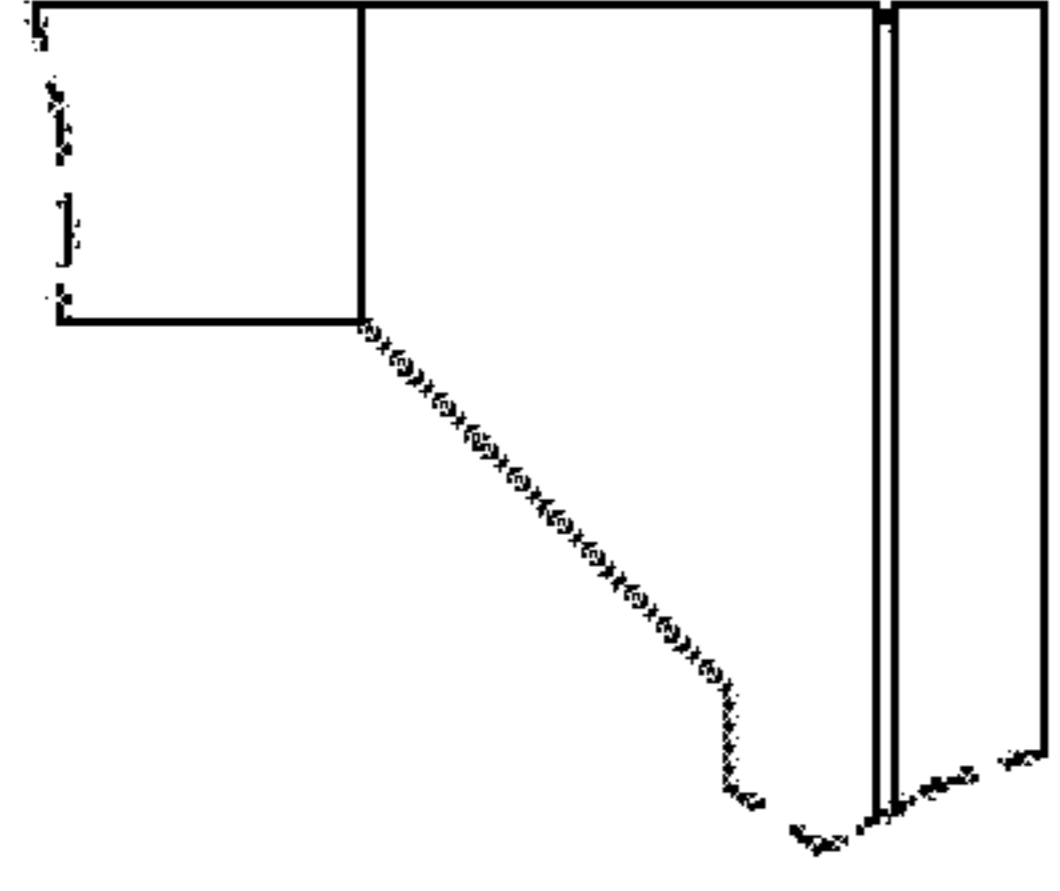


FIG. 13G

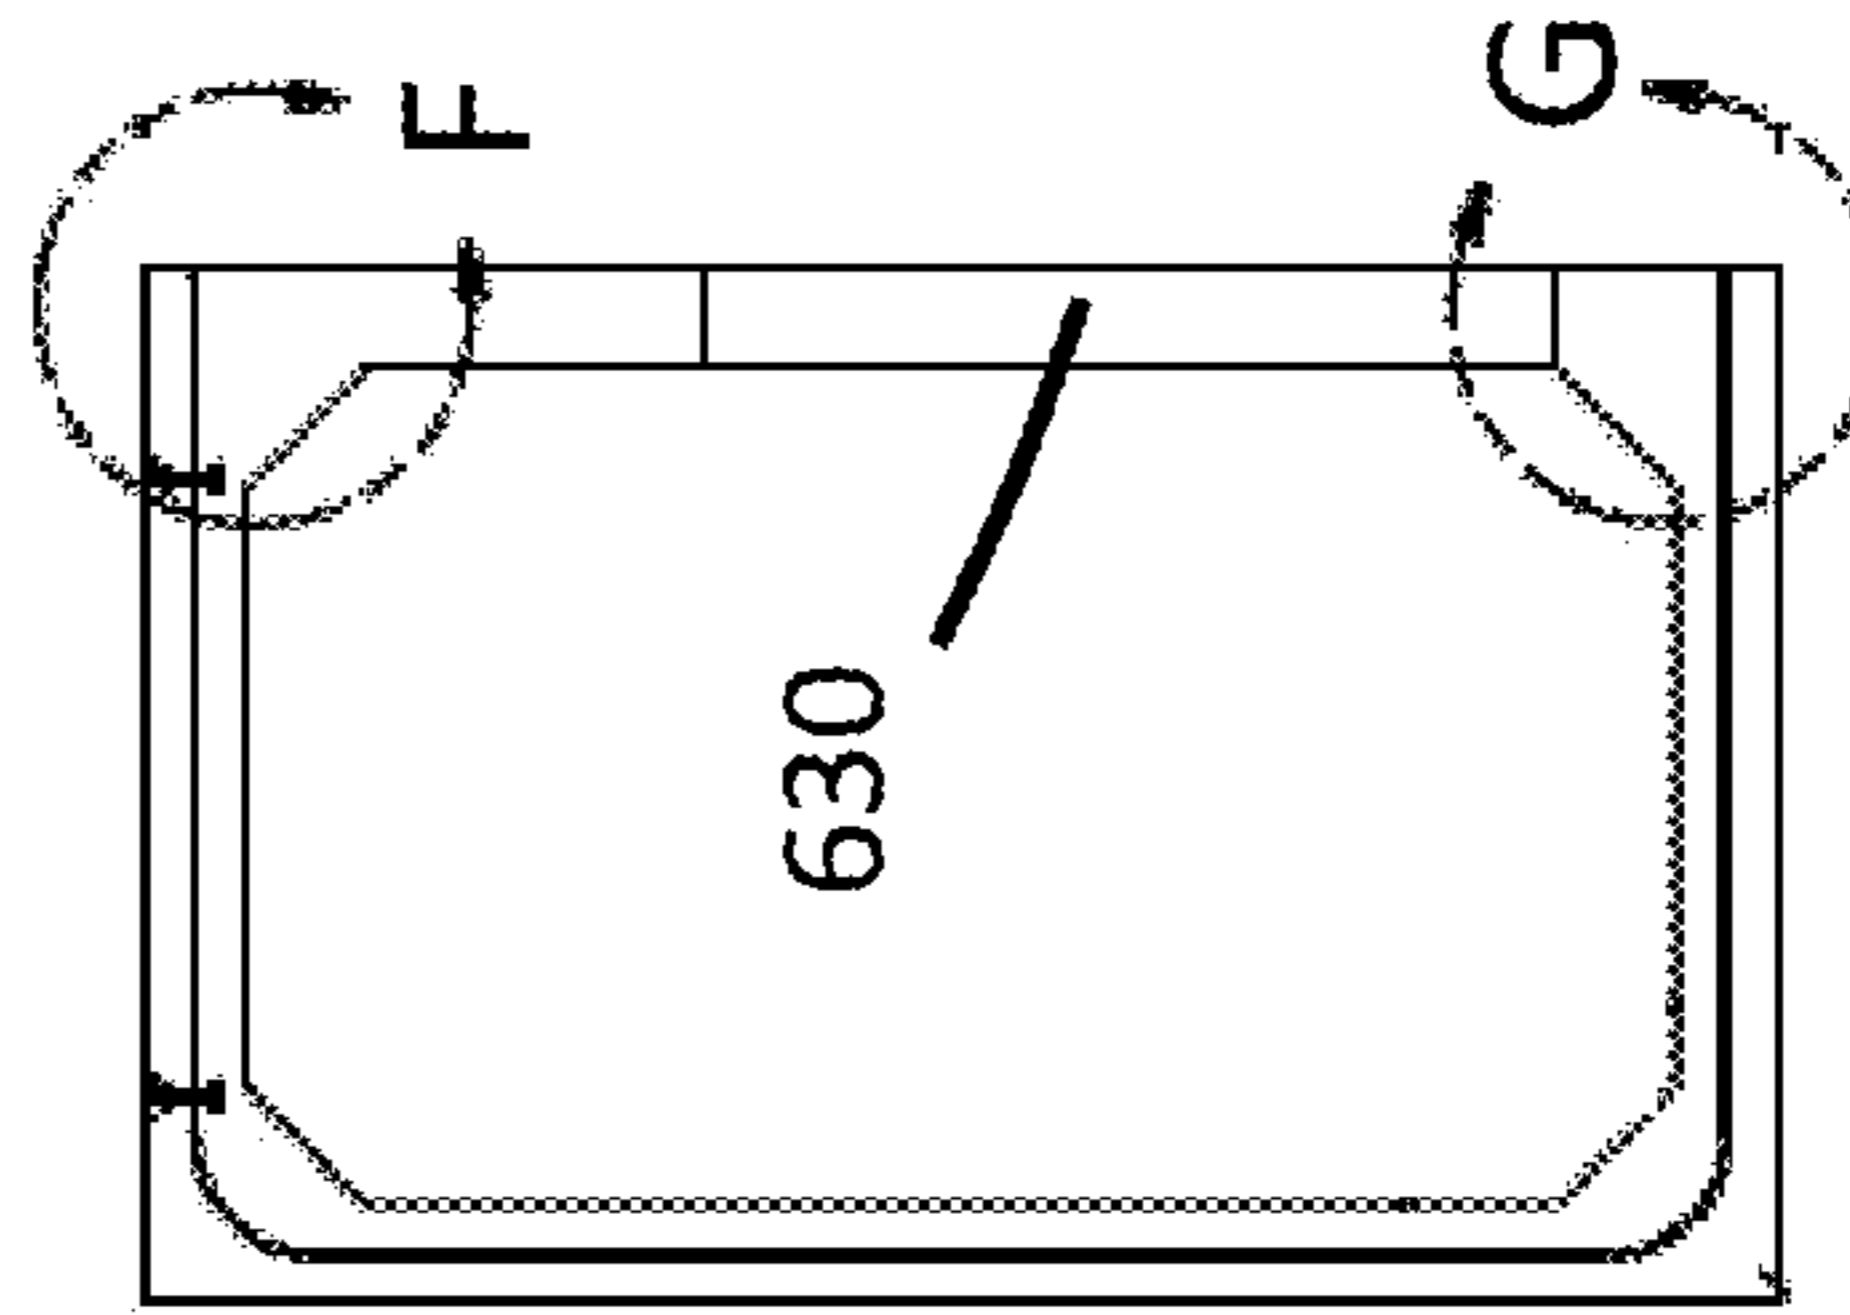


FIG. 13C

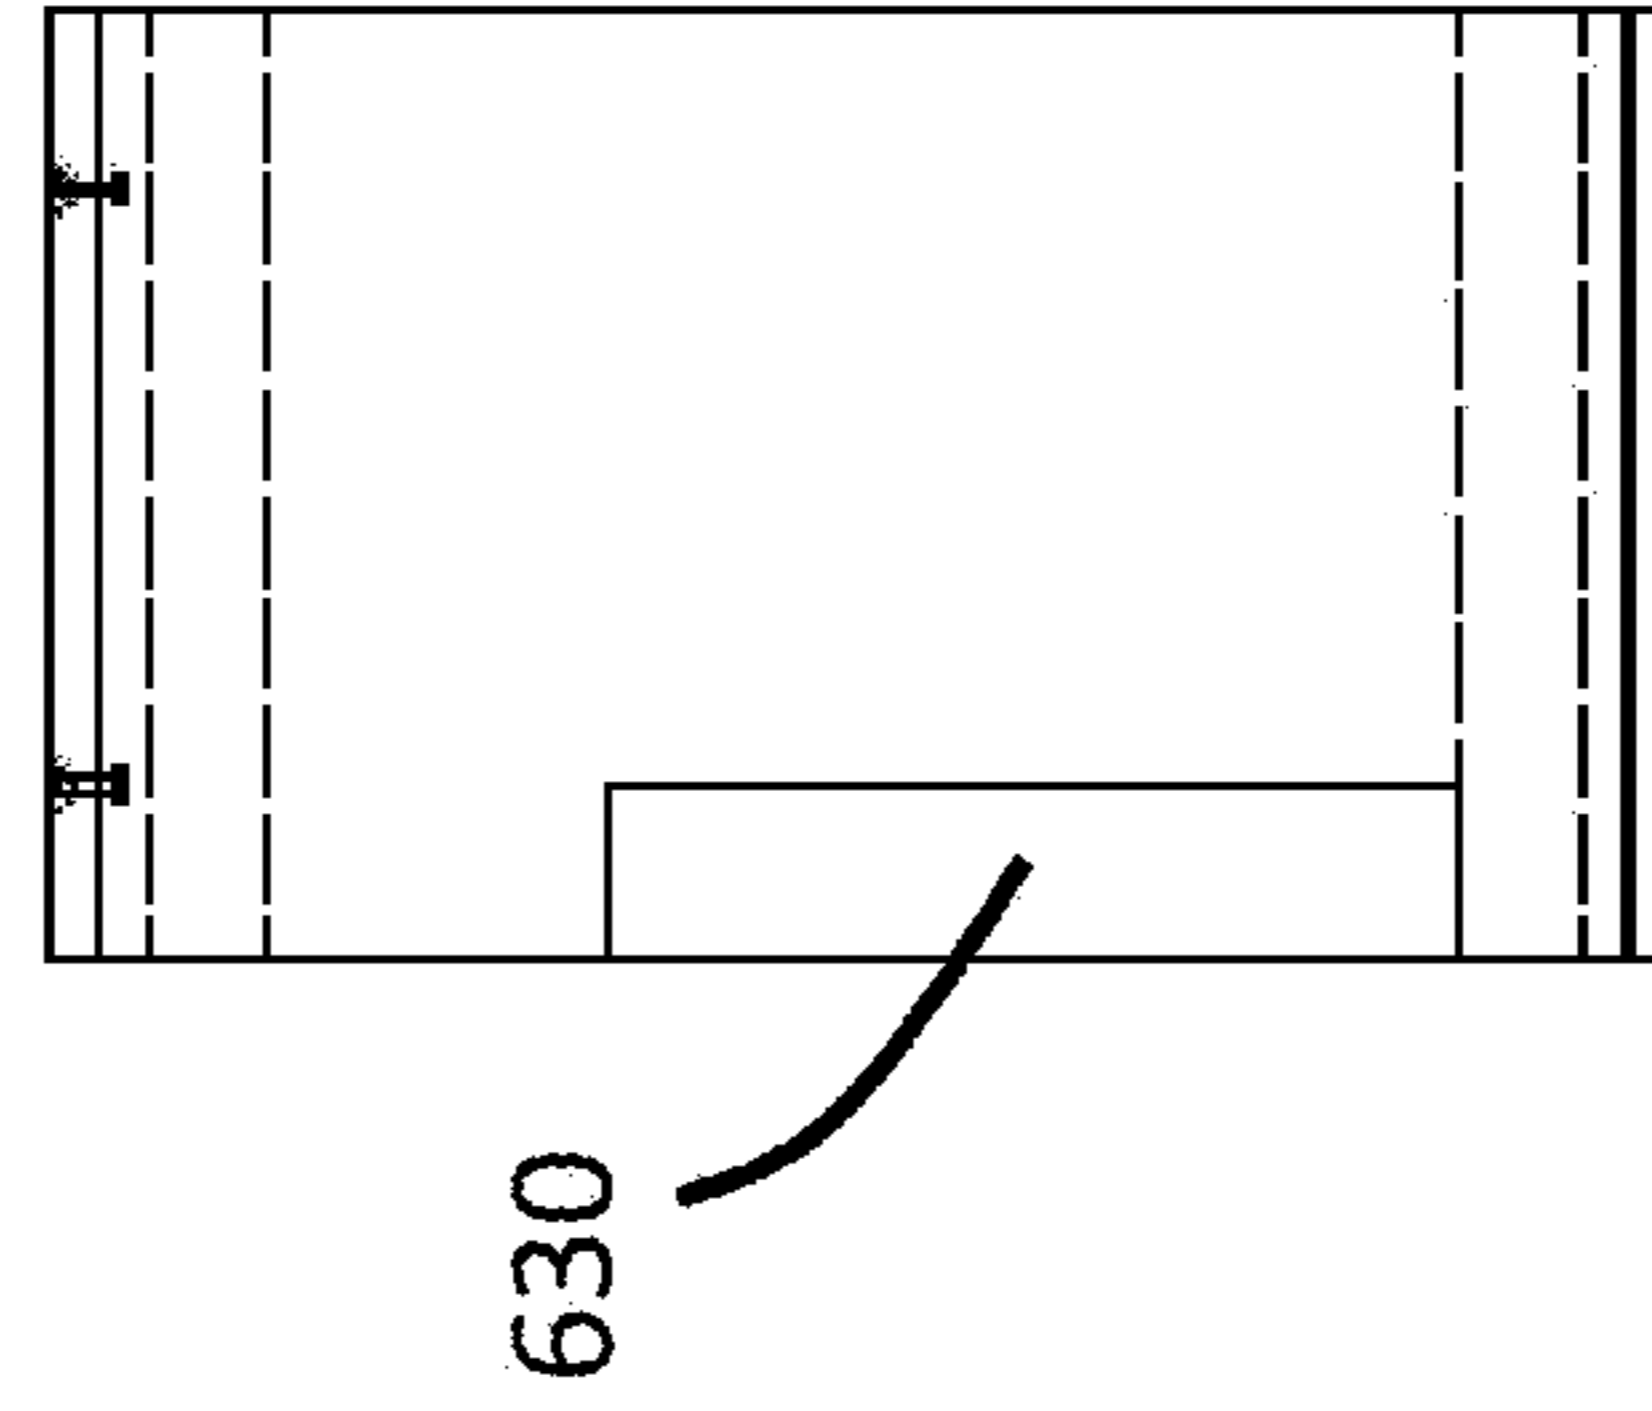


FIG. 13D

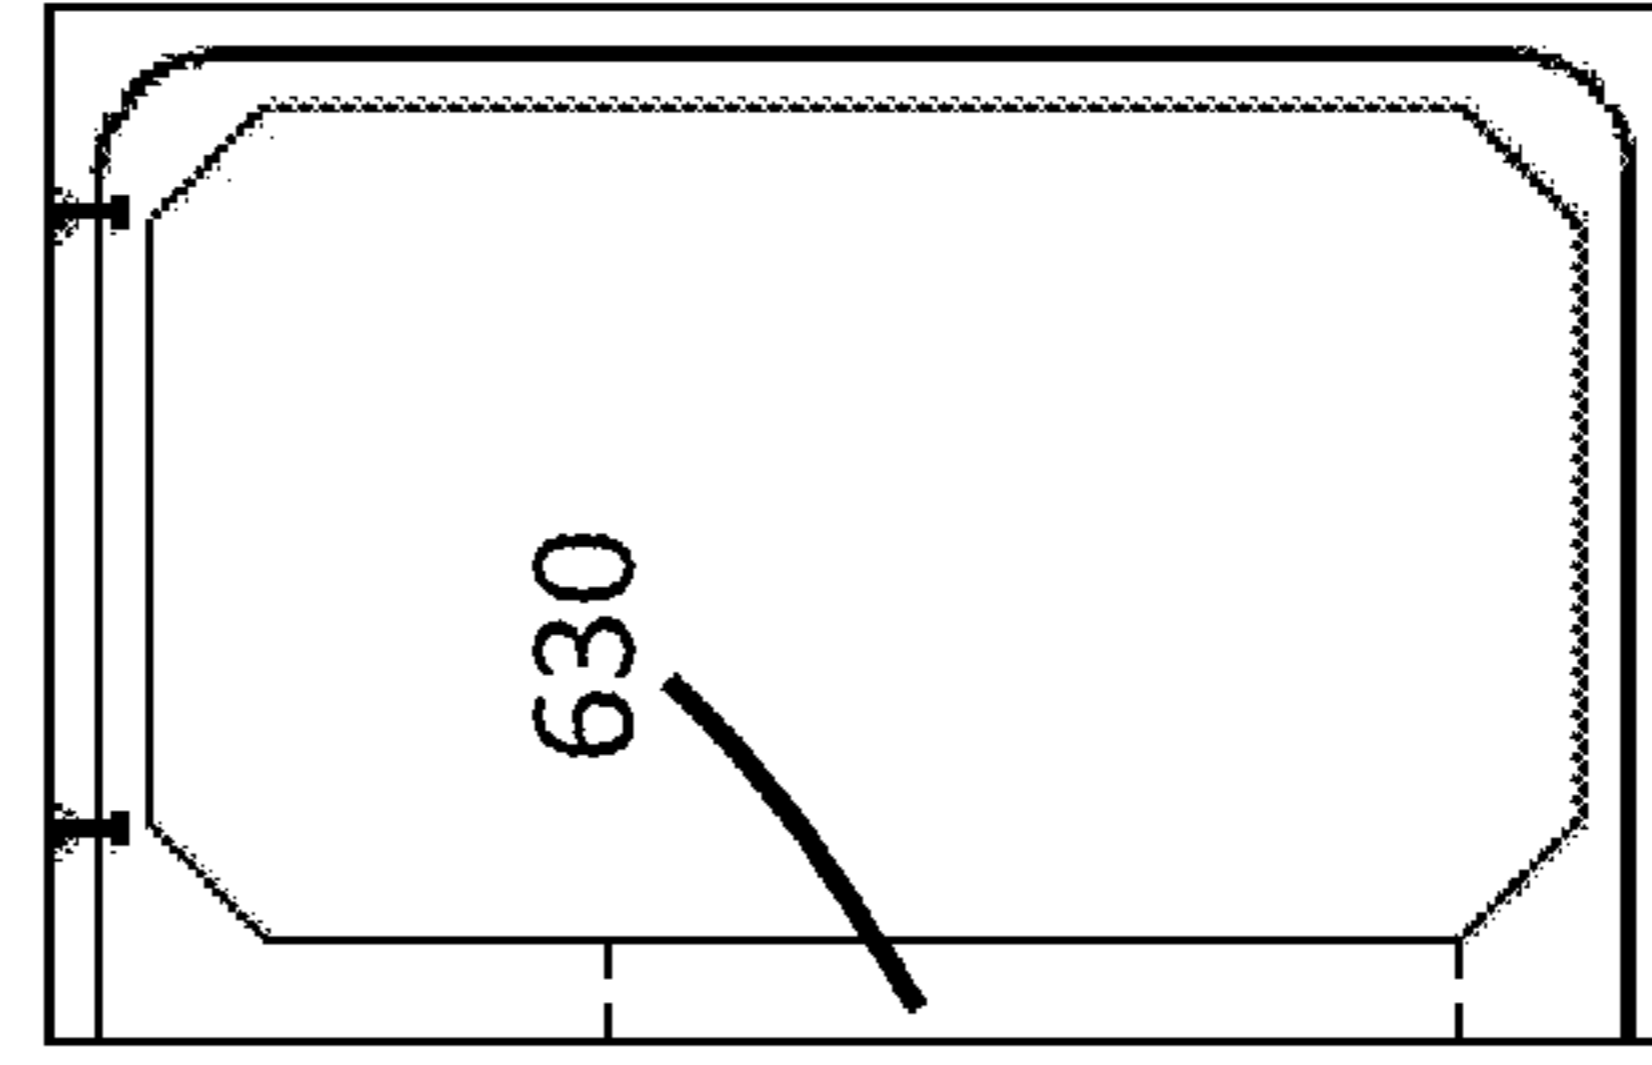


FIG. 13E

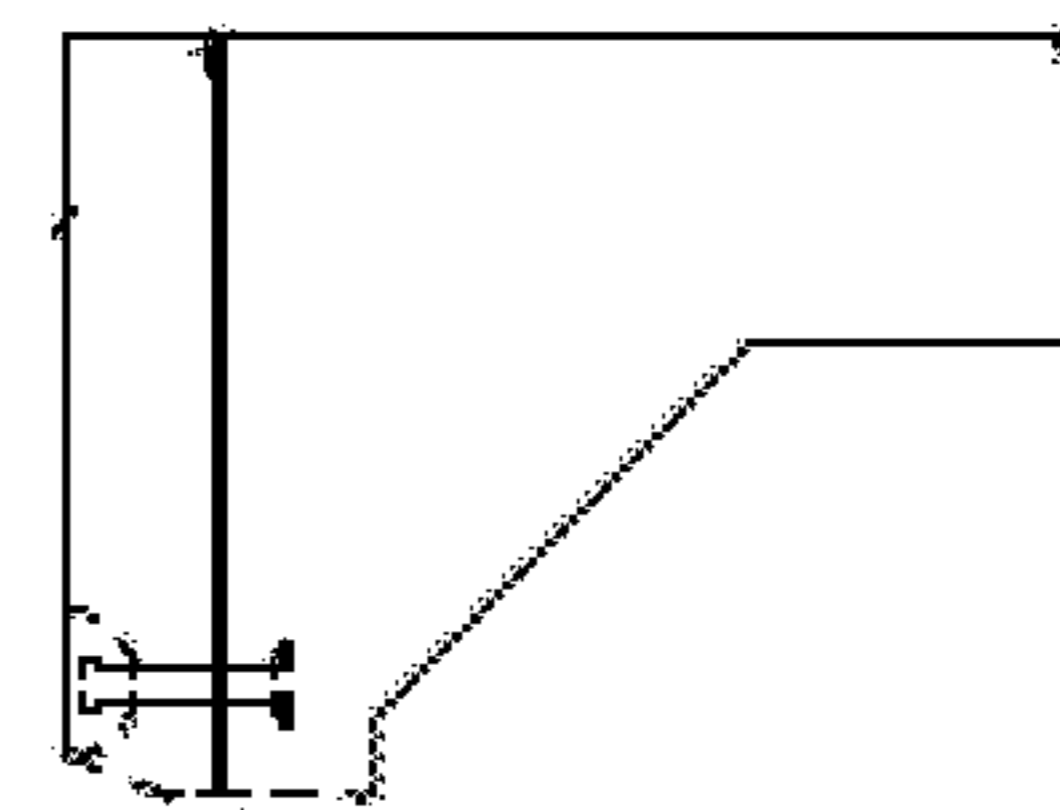


FIG. 13F

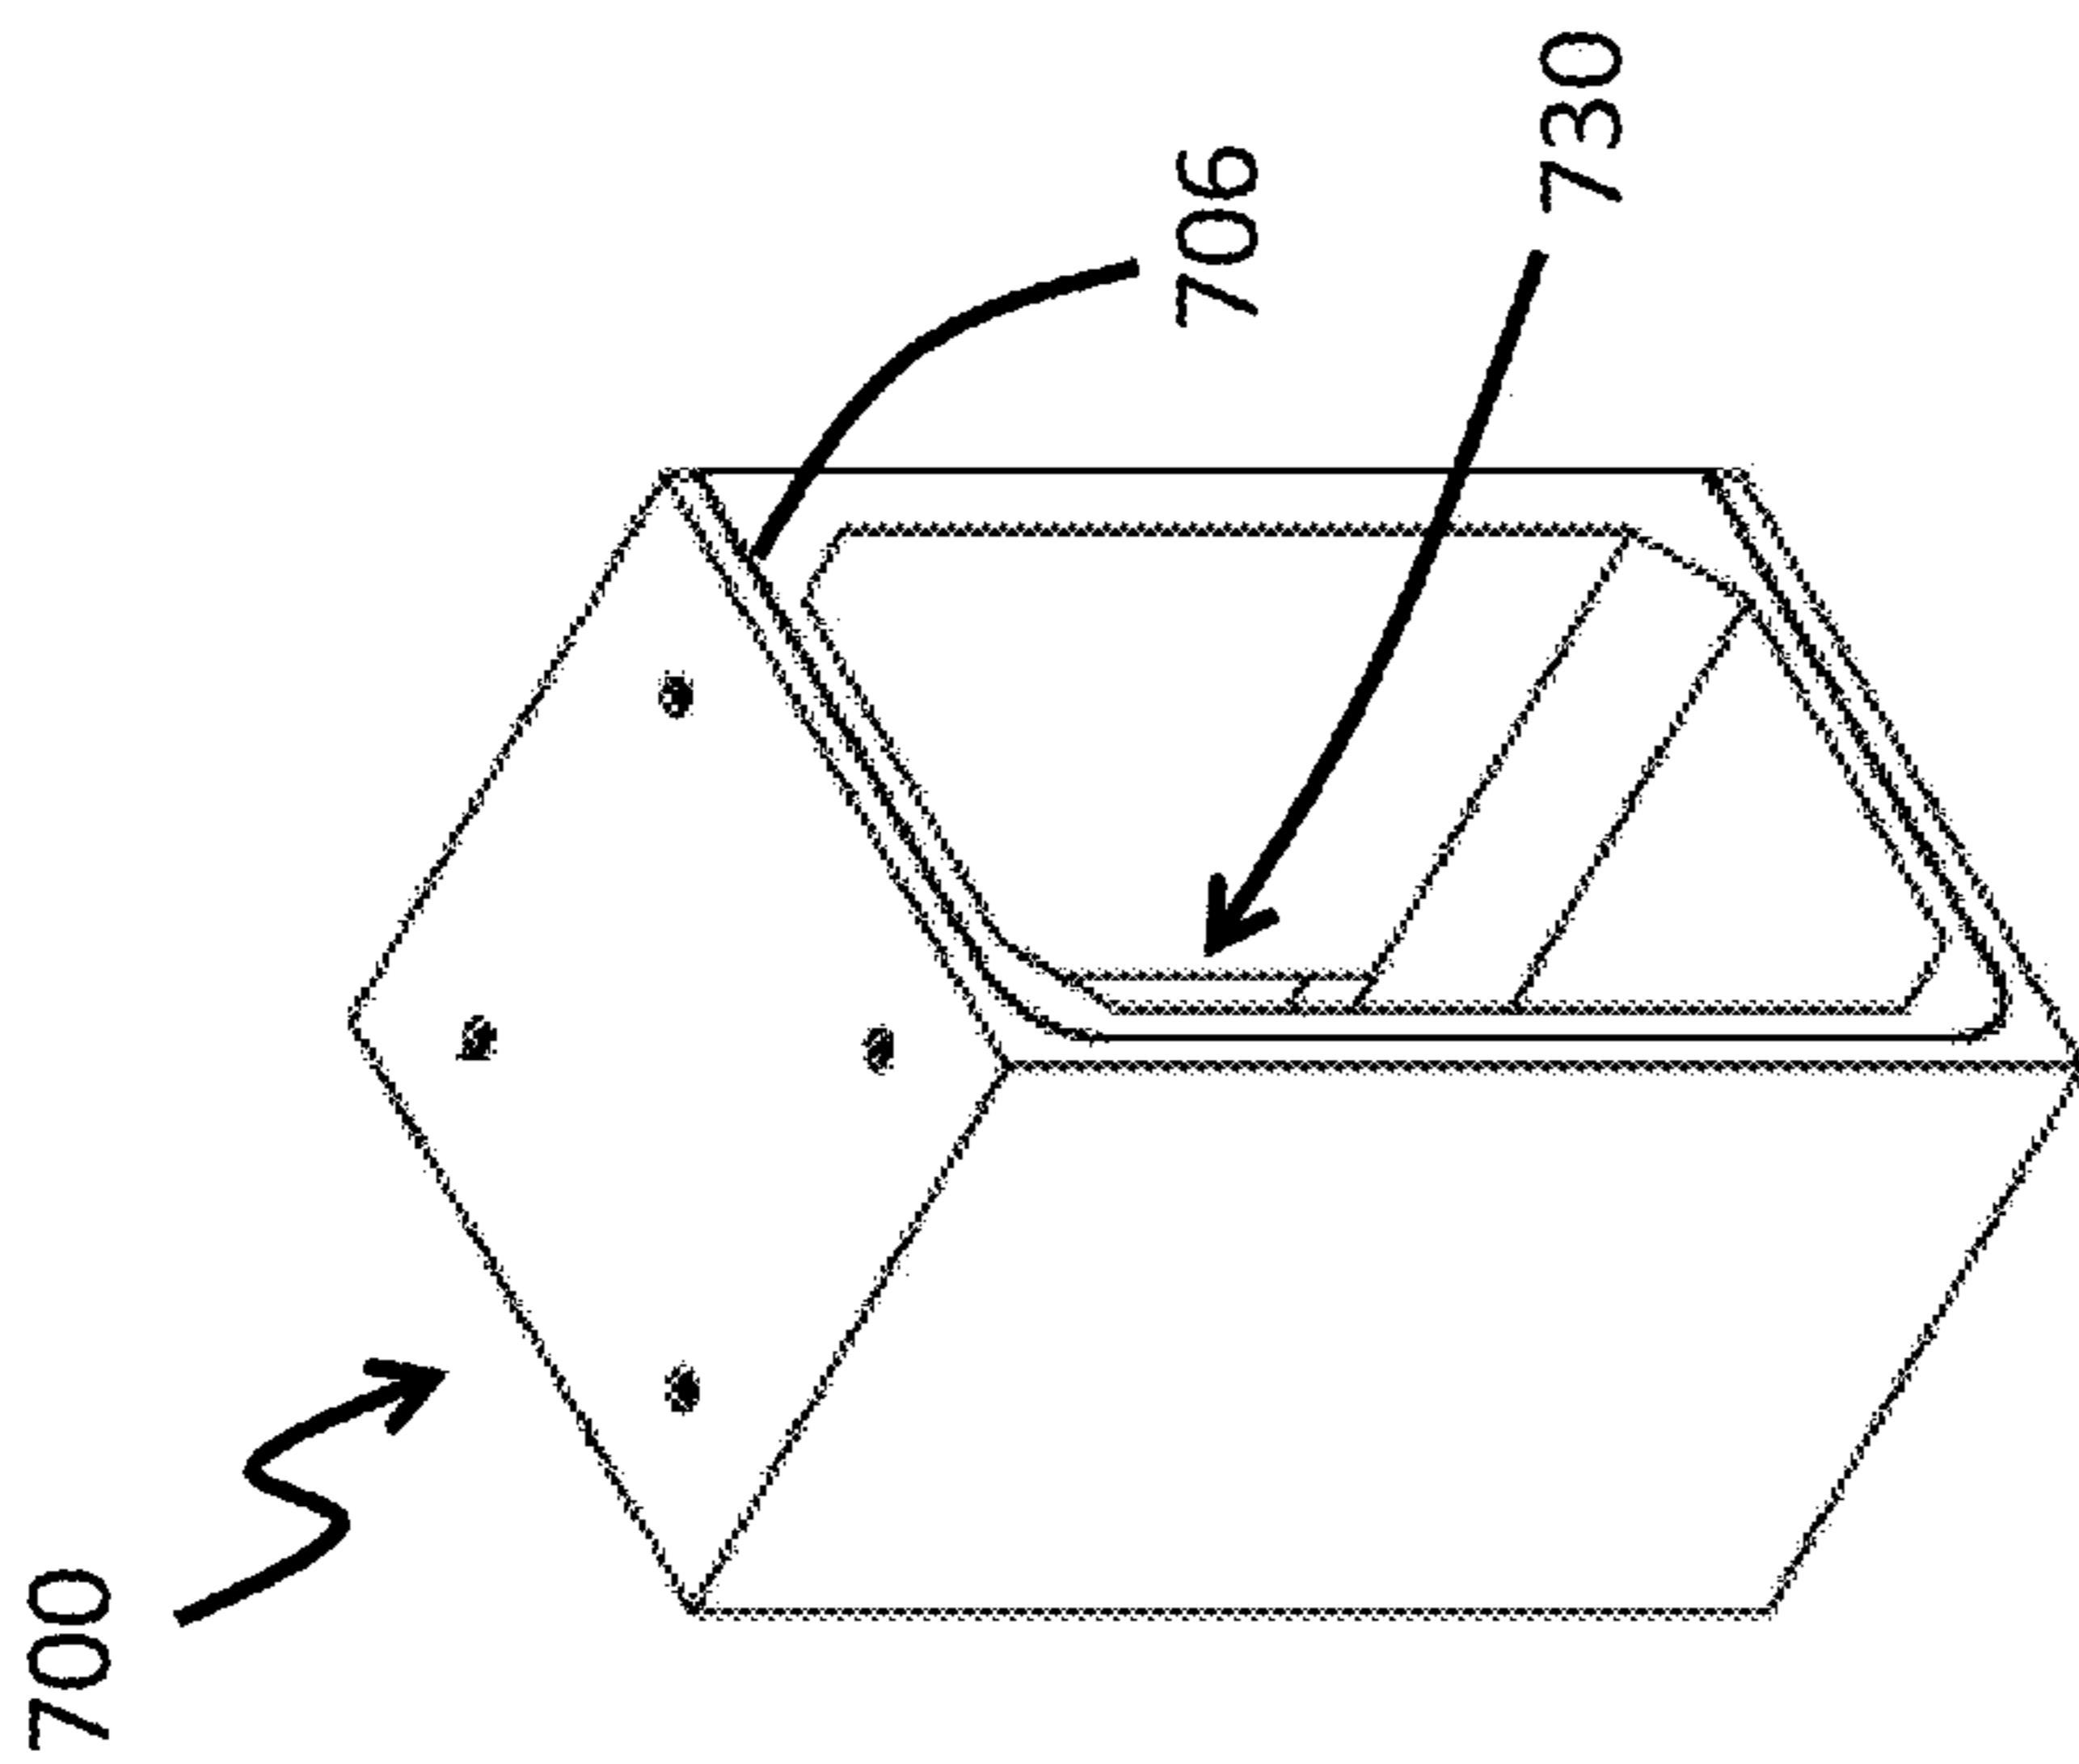


FIG. 14A

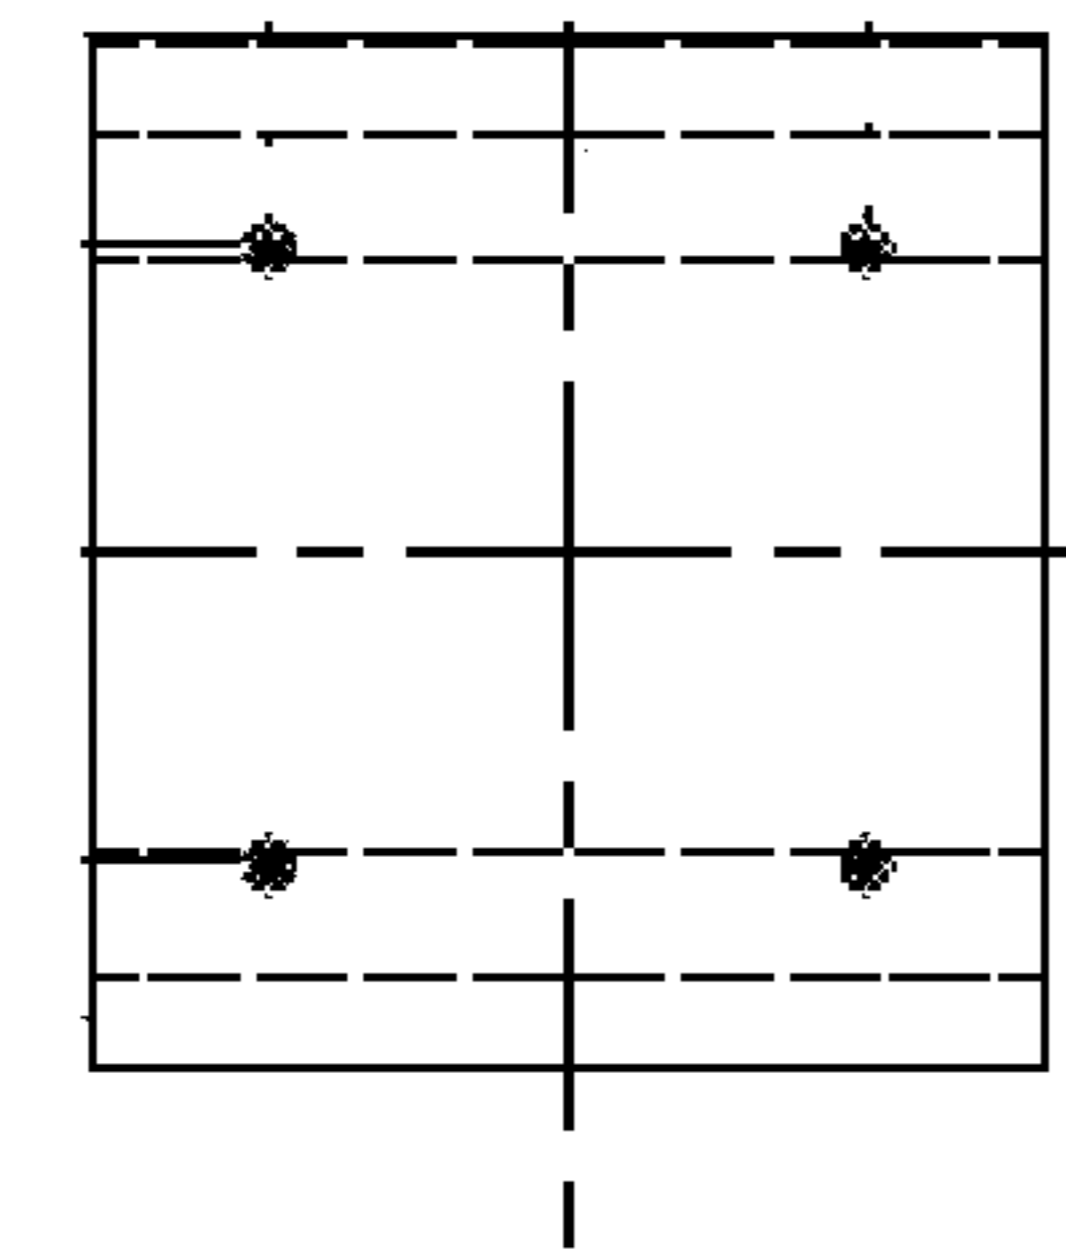


FIG. 14B

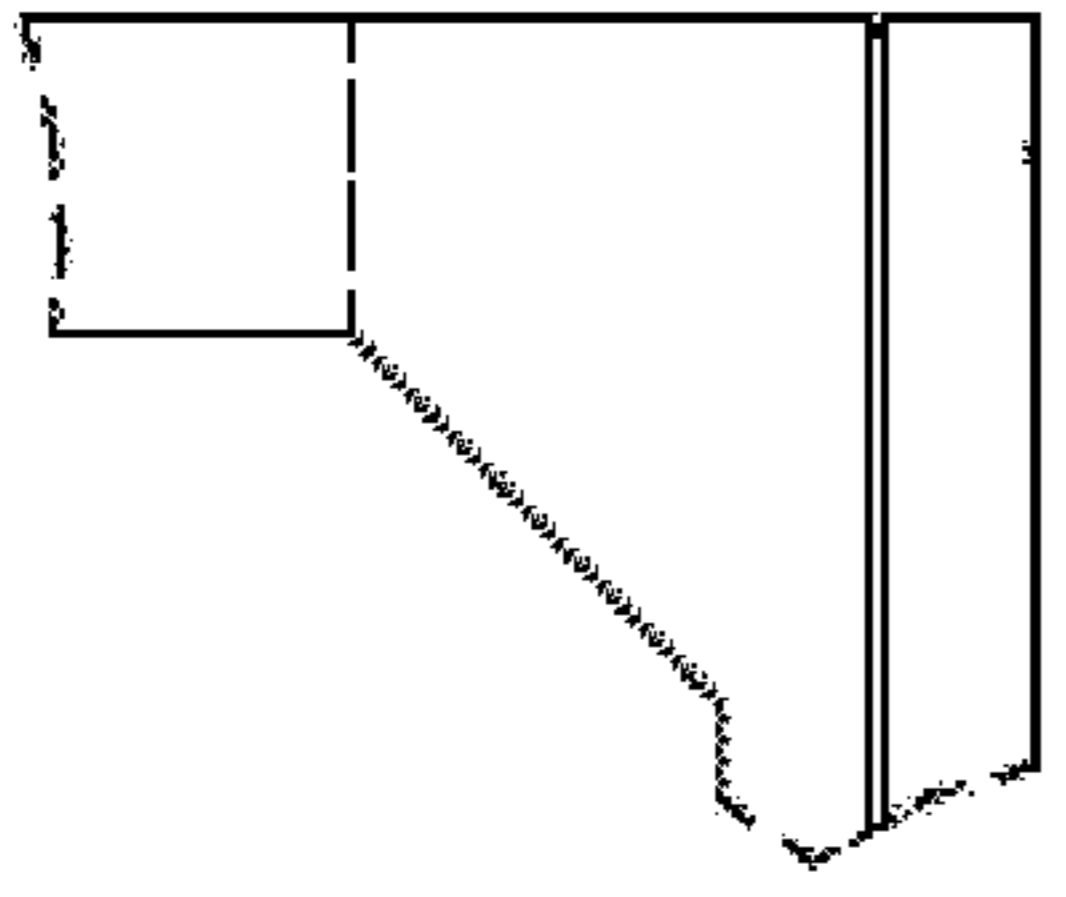


FIG. 14G

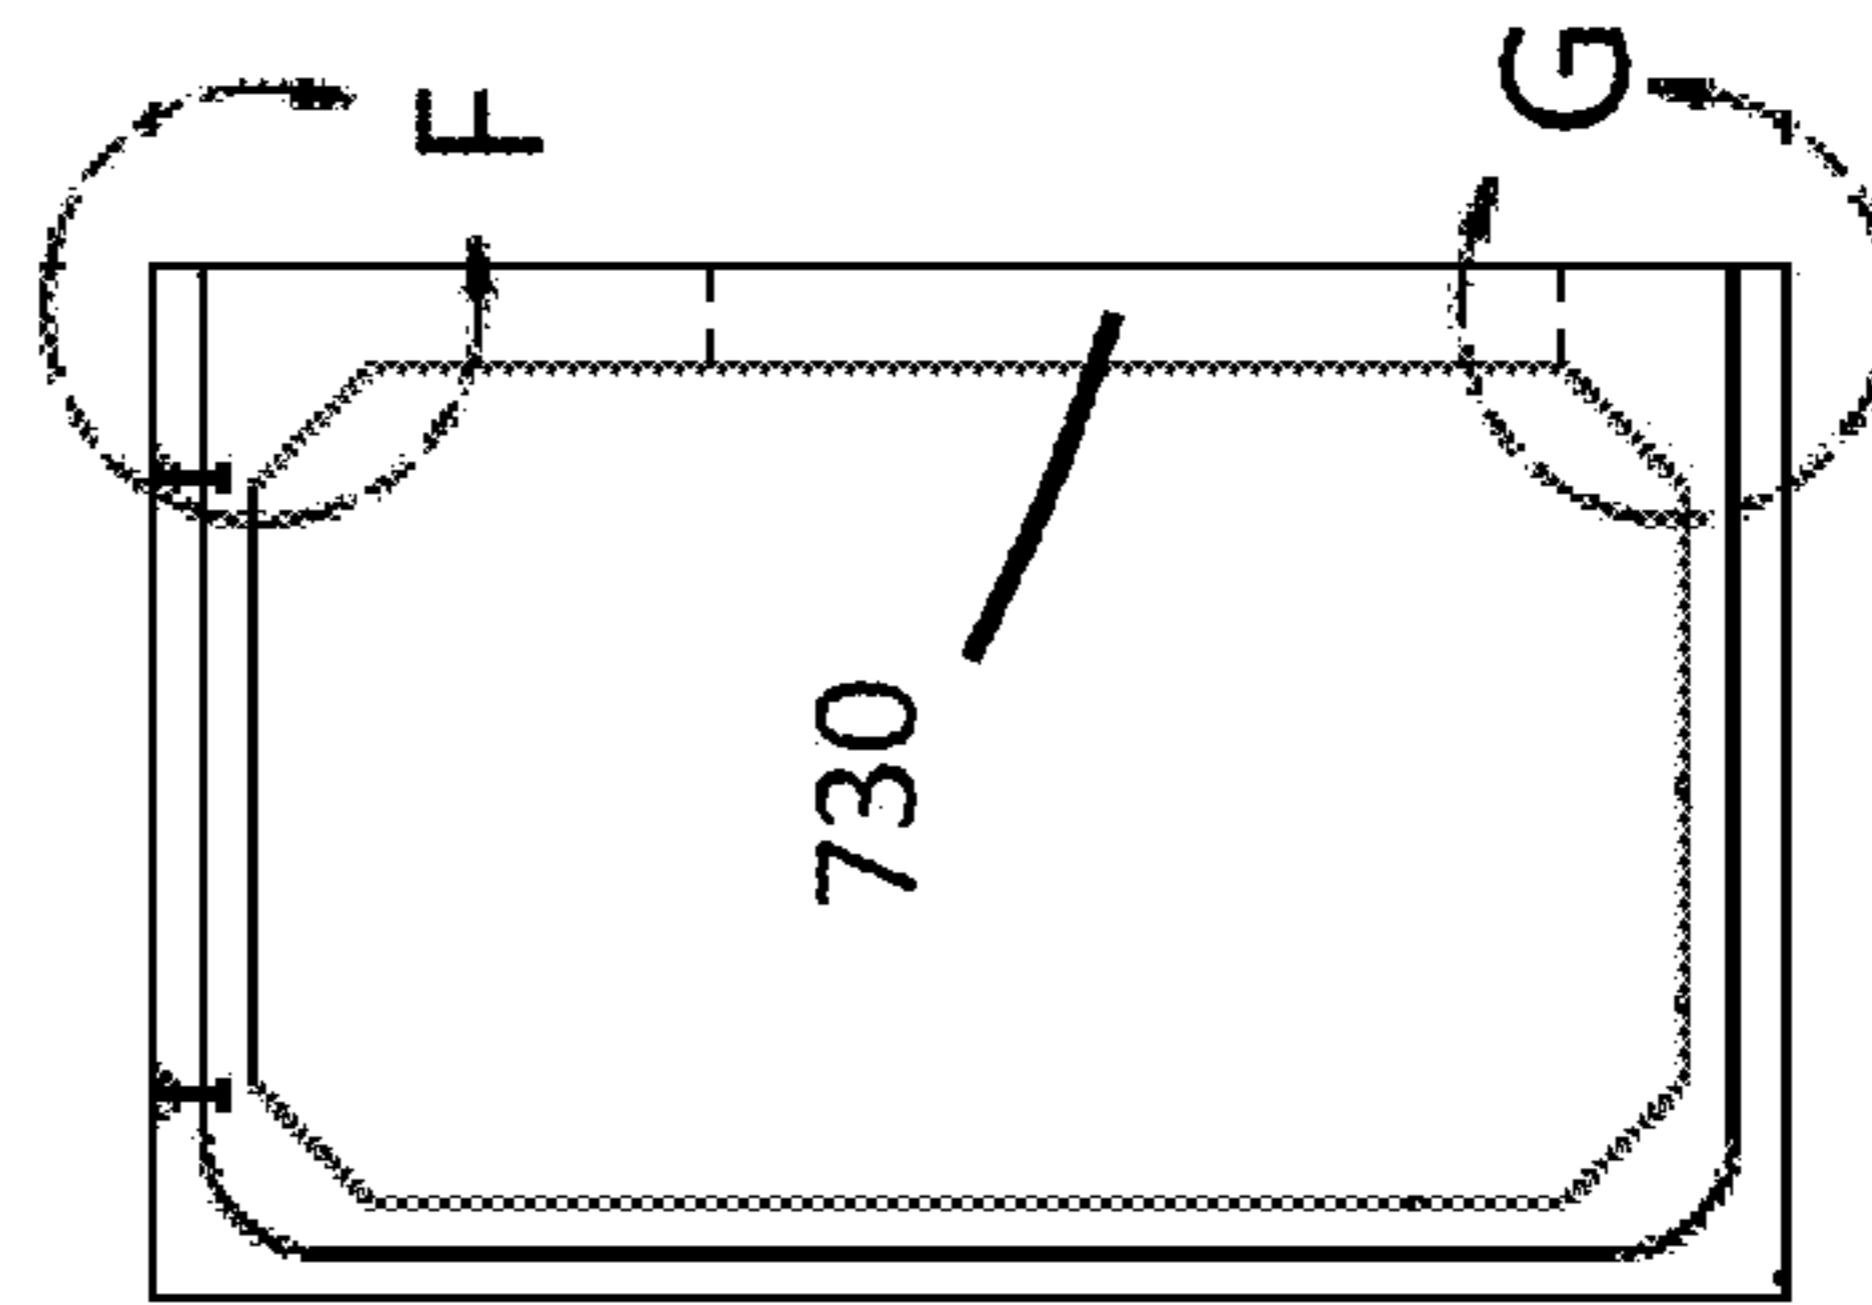


FIG. 14C

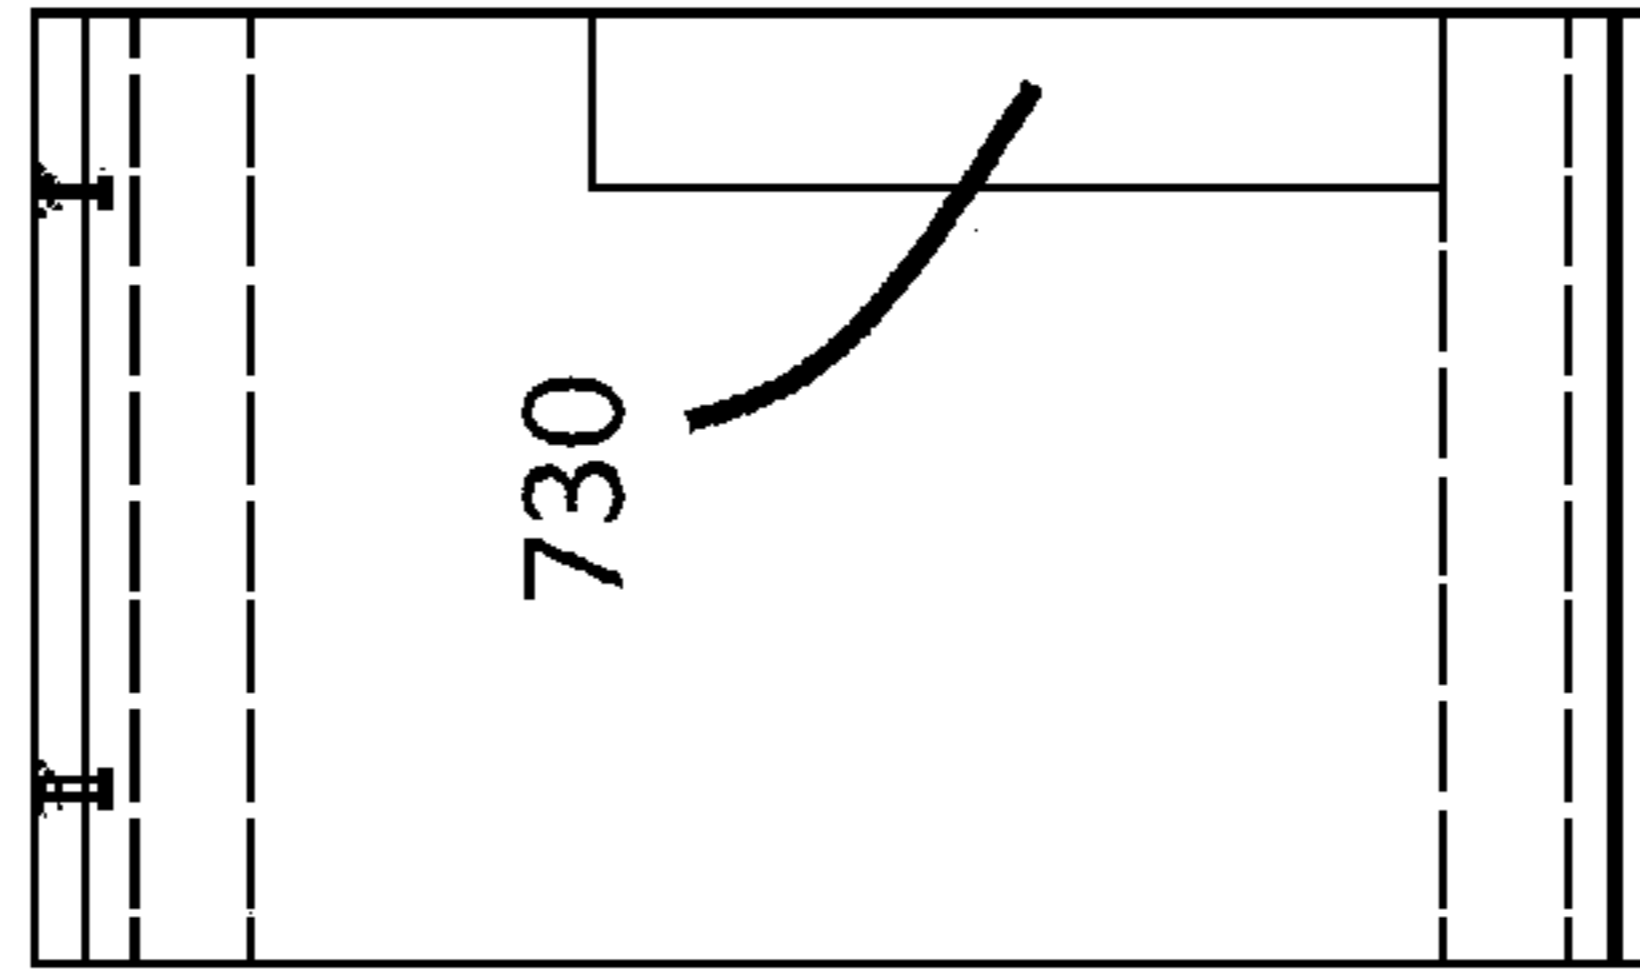


FIG. 14D

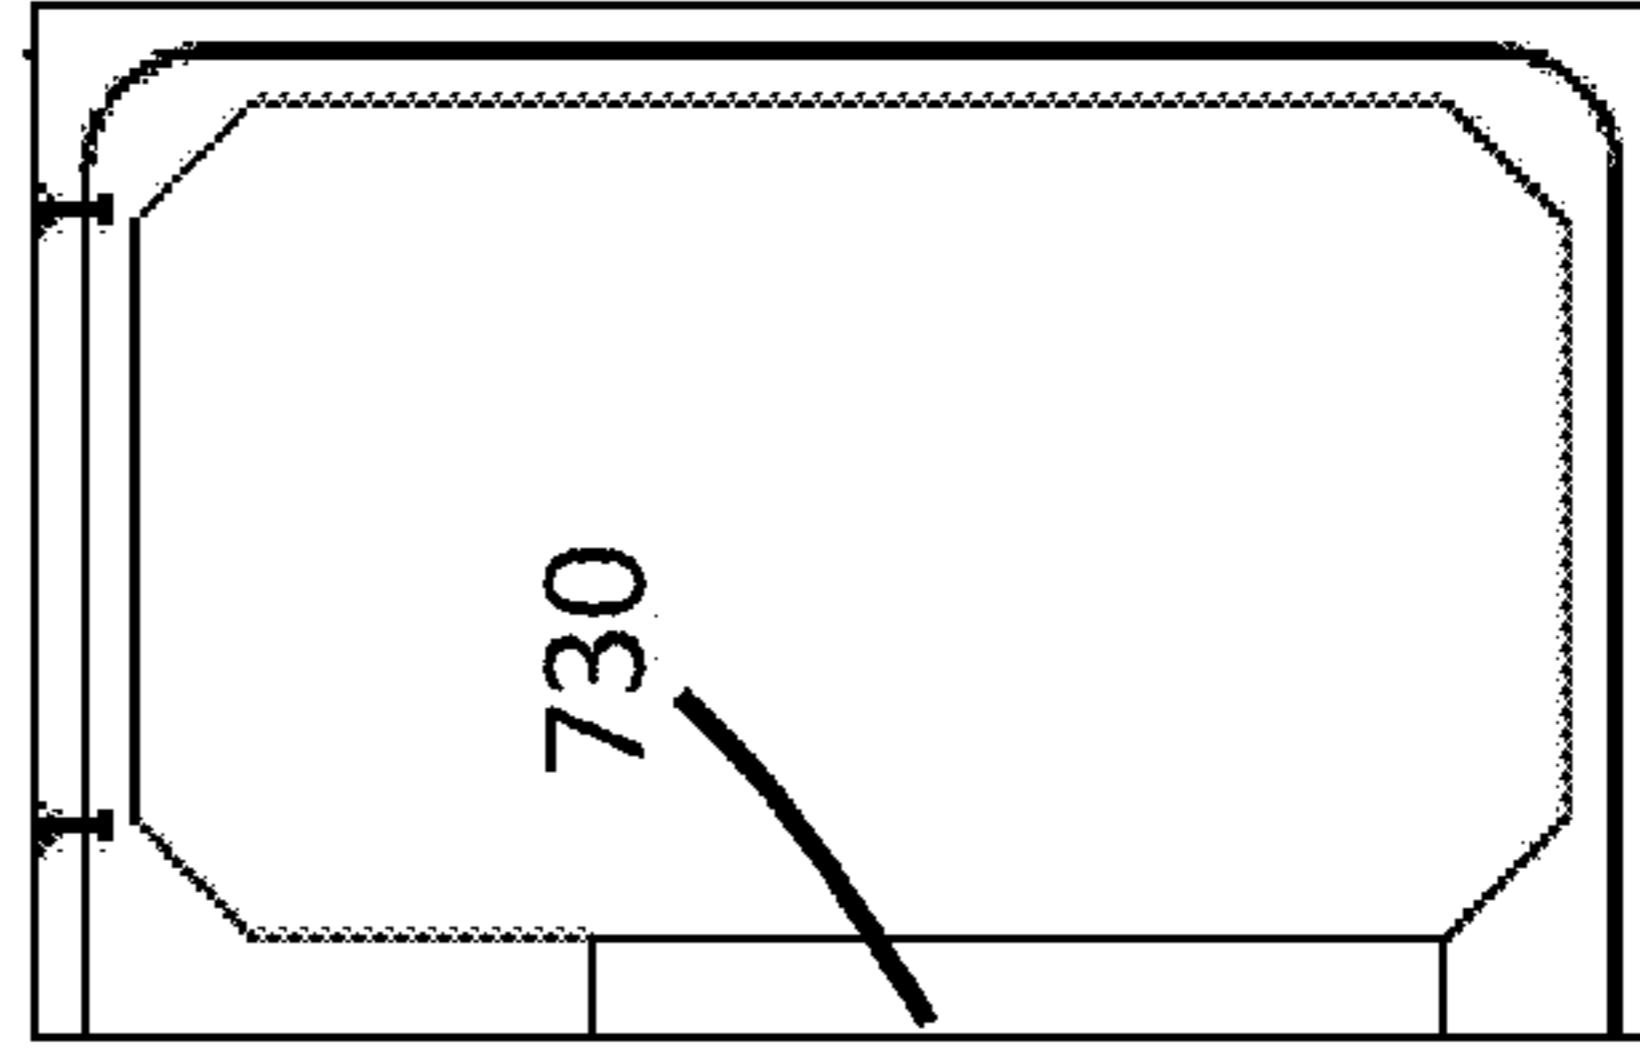


FIG. 14E

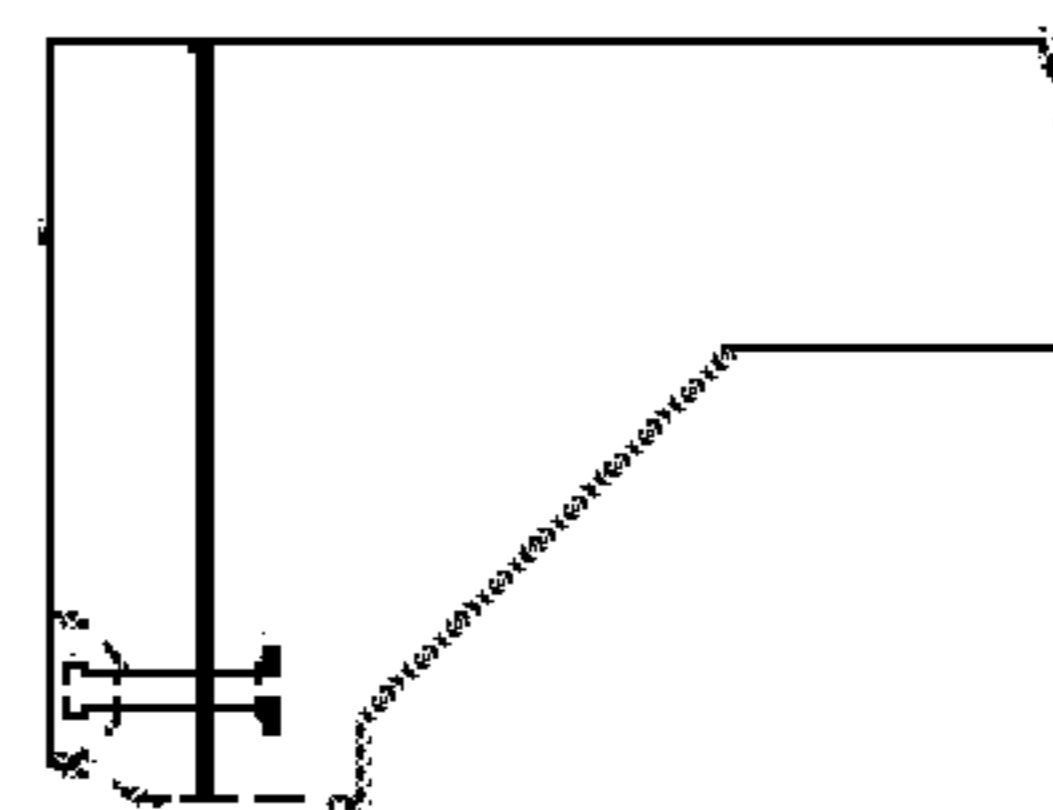
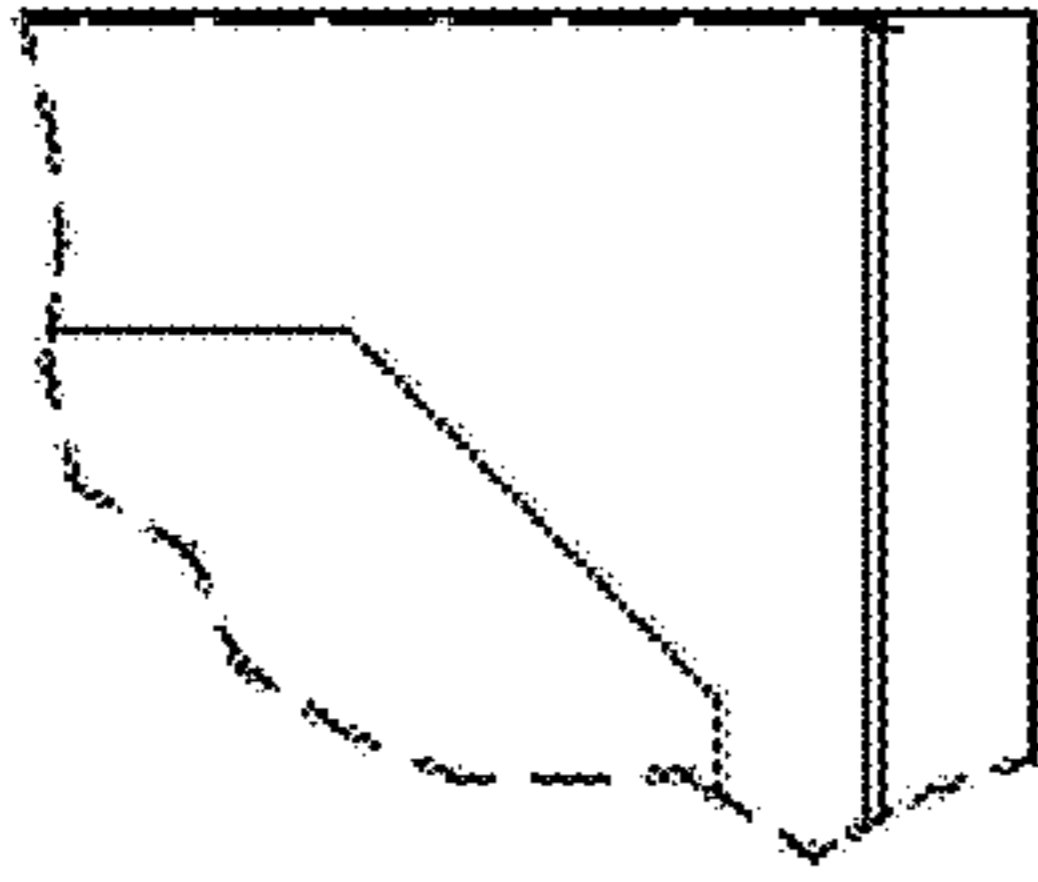
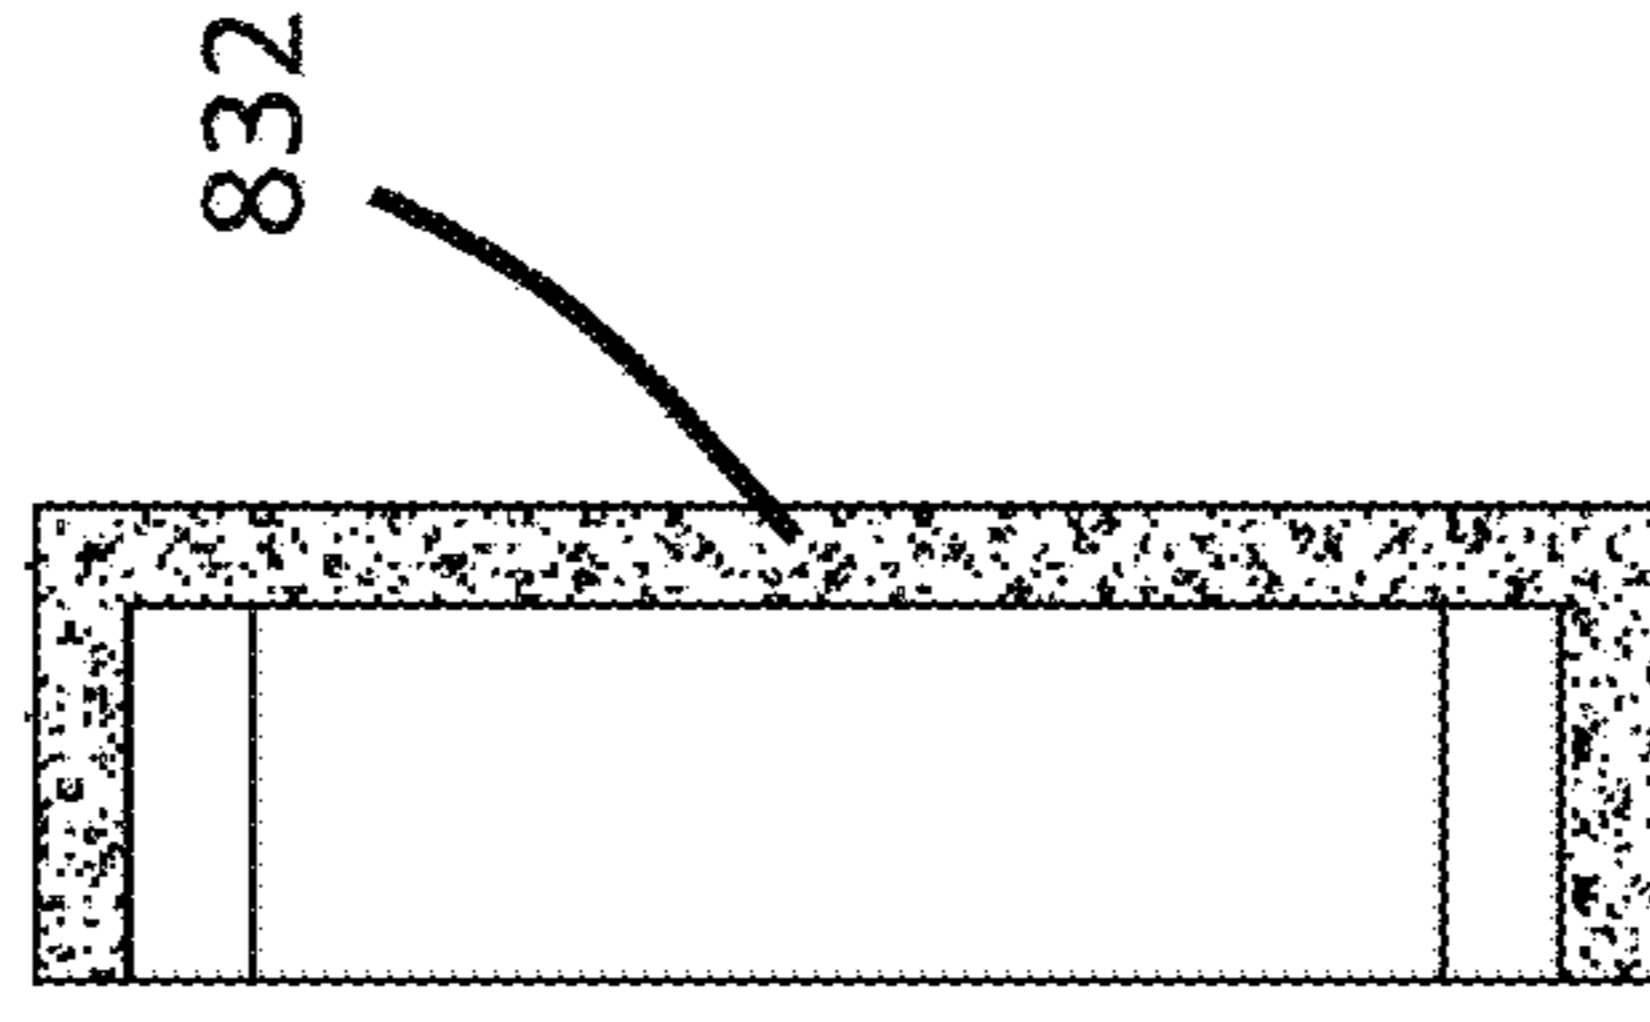
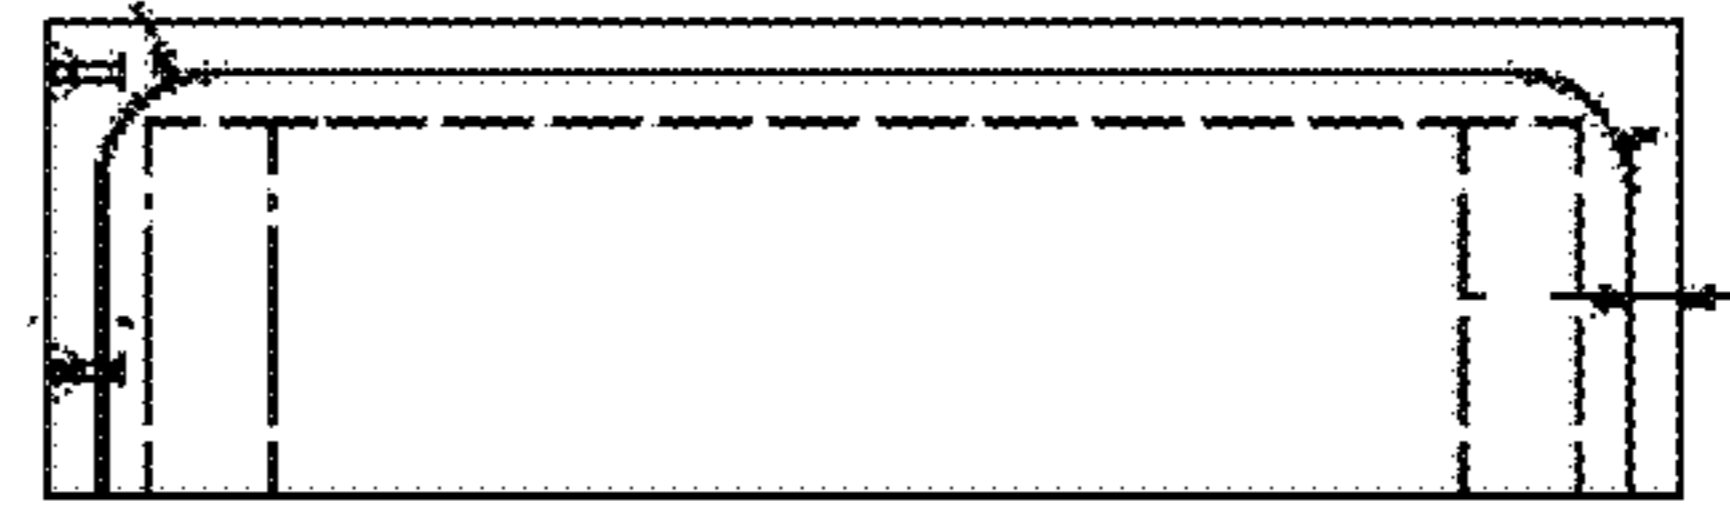
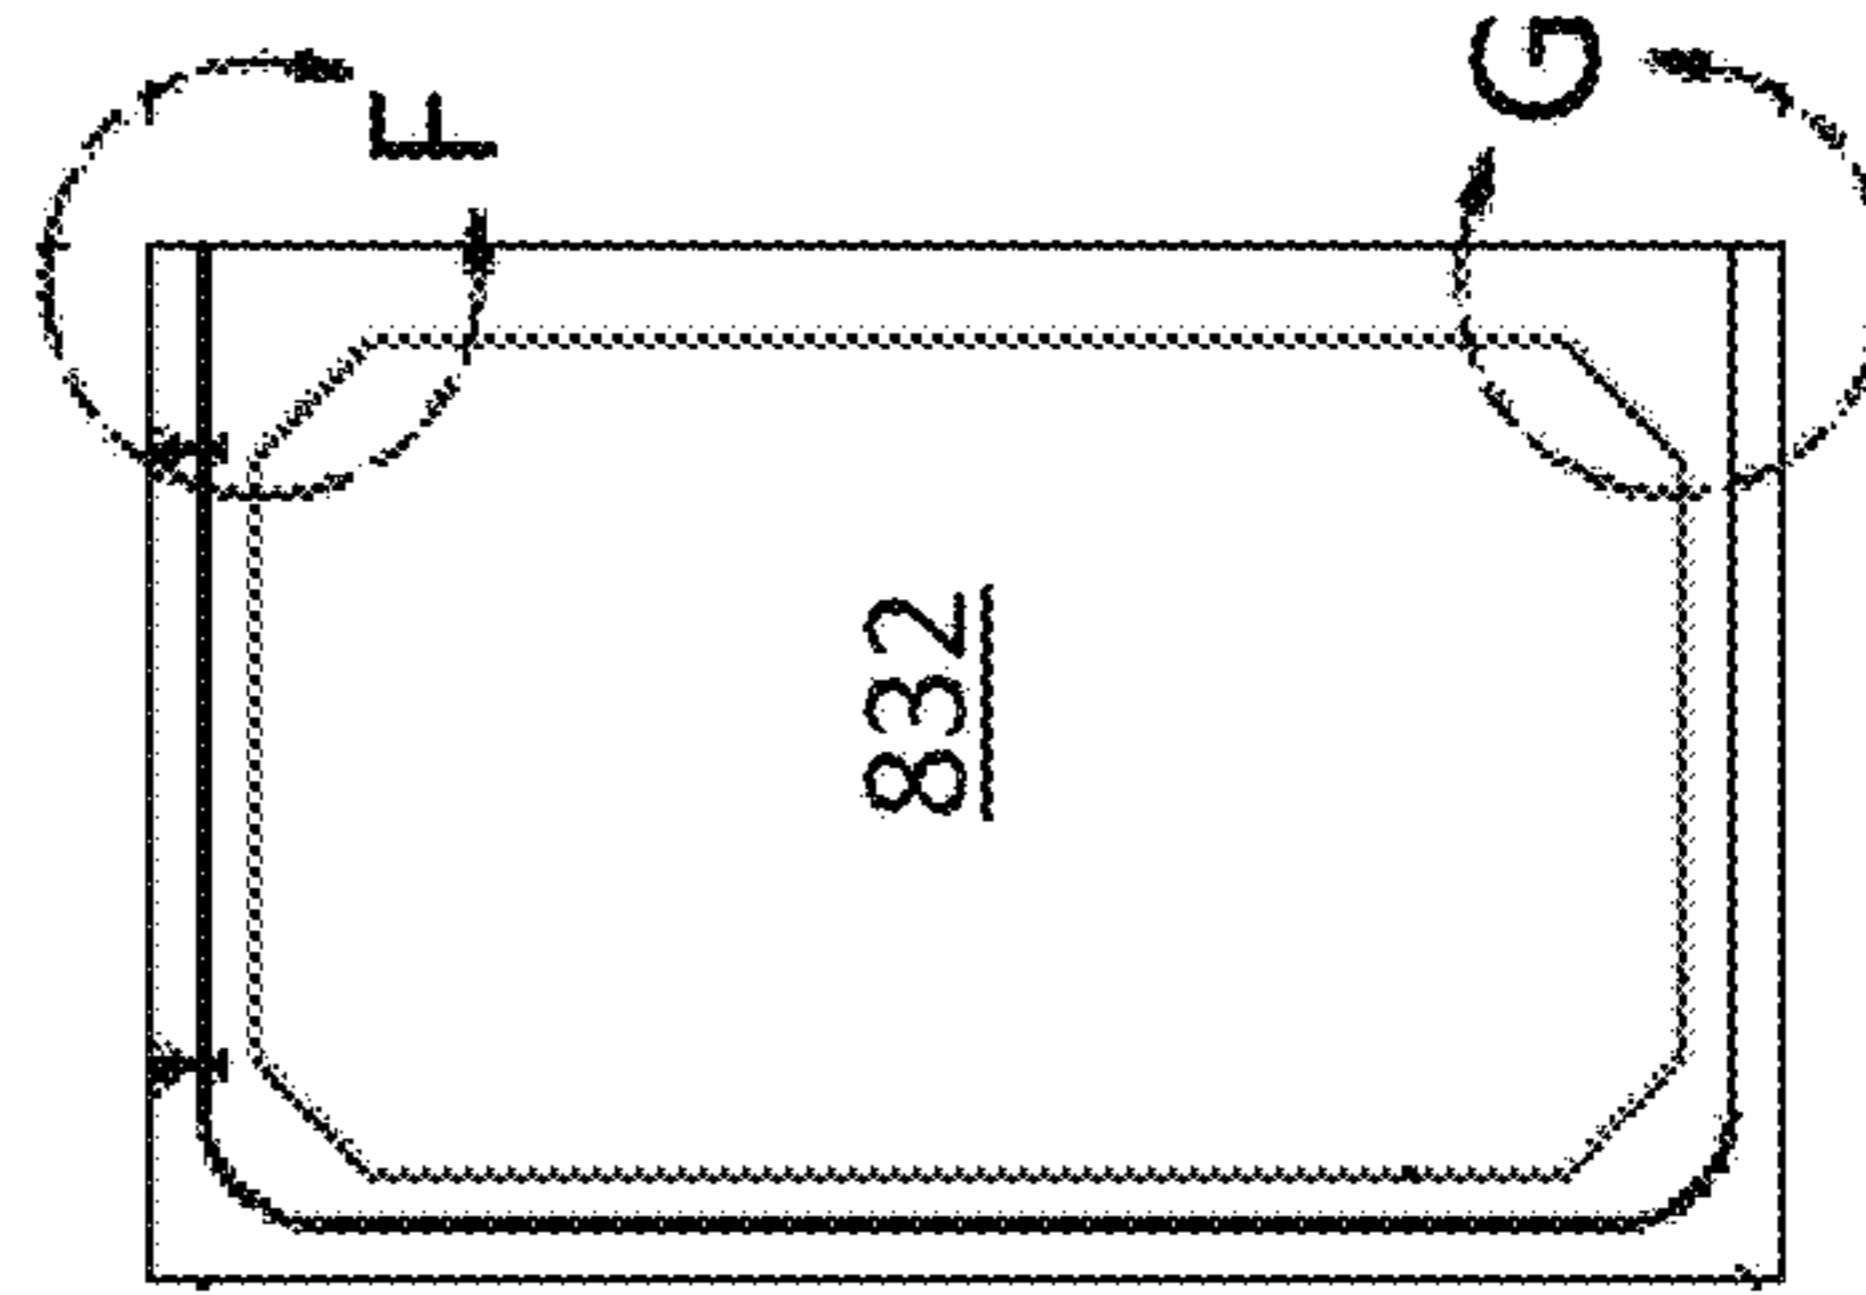
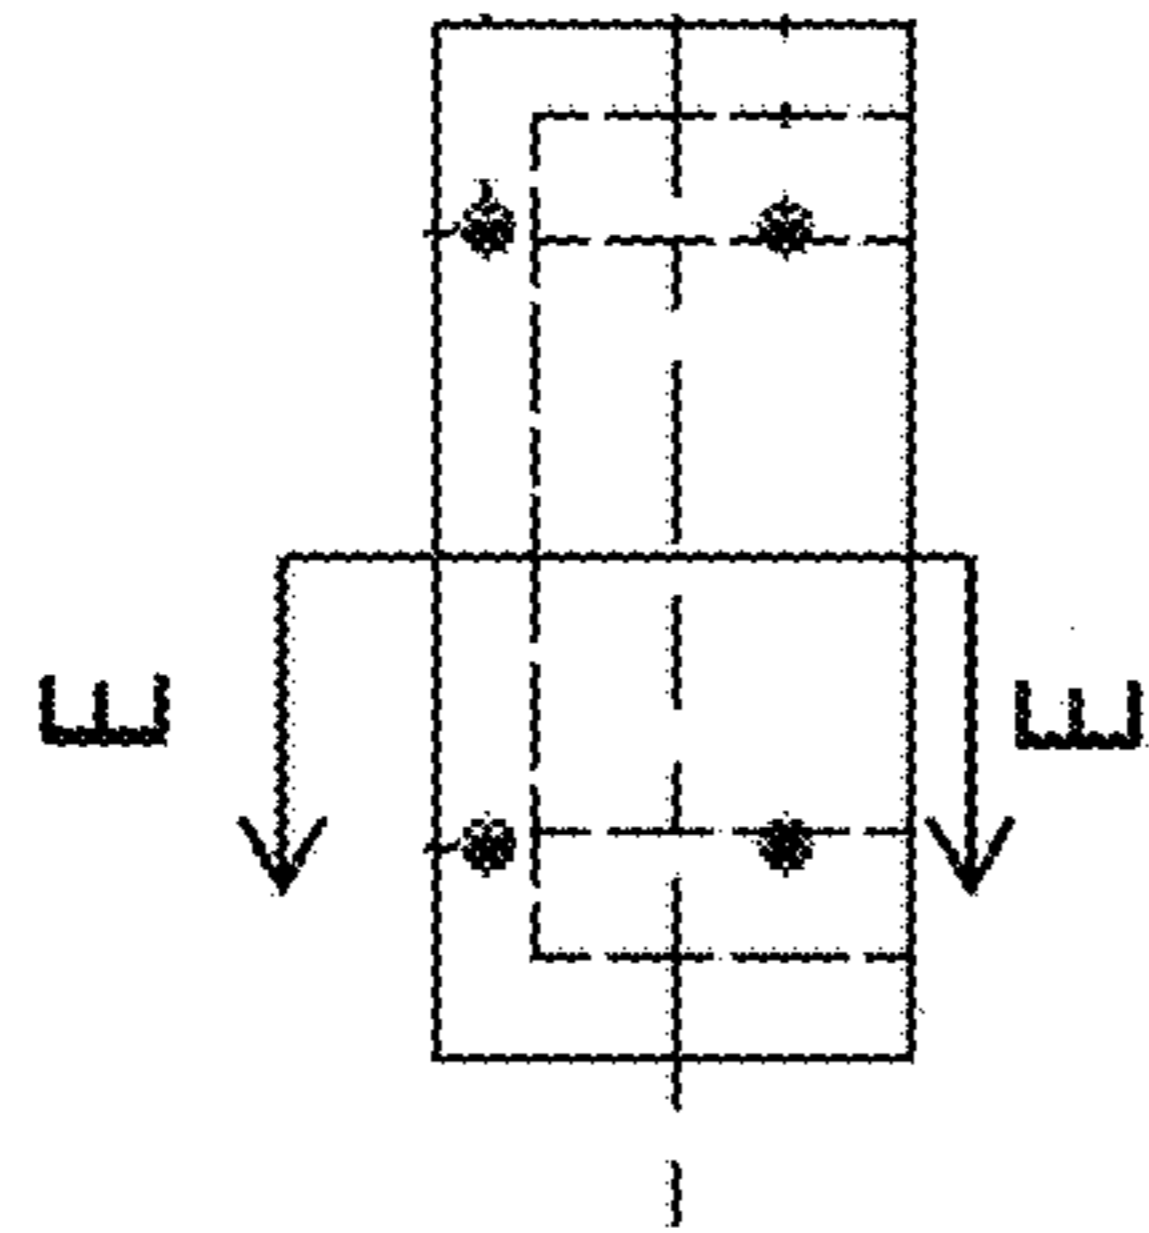
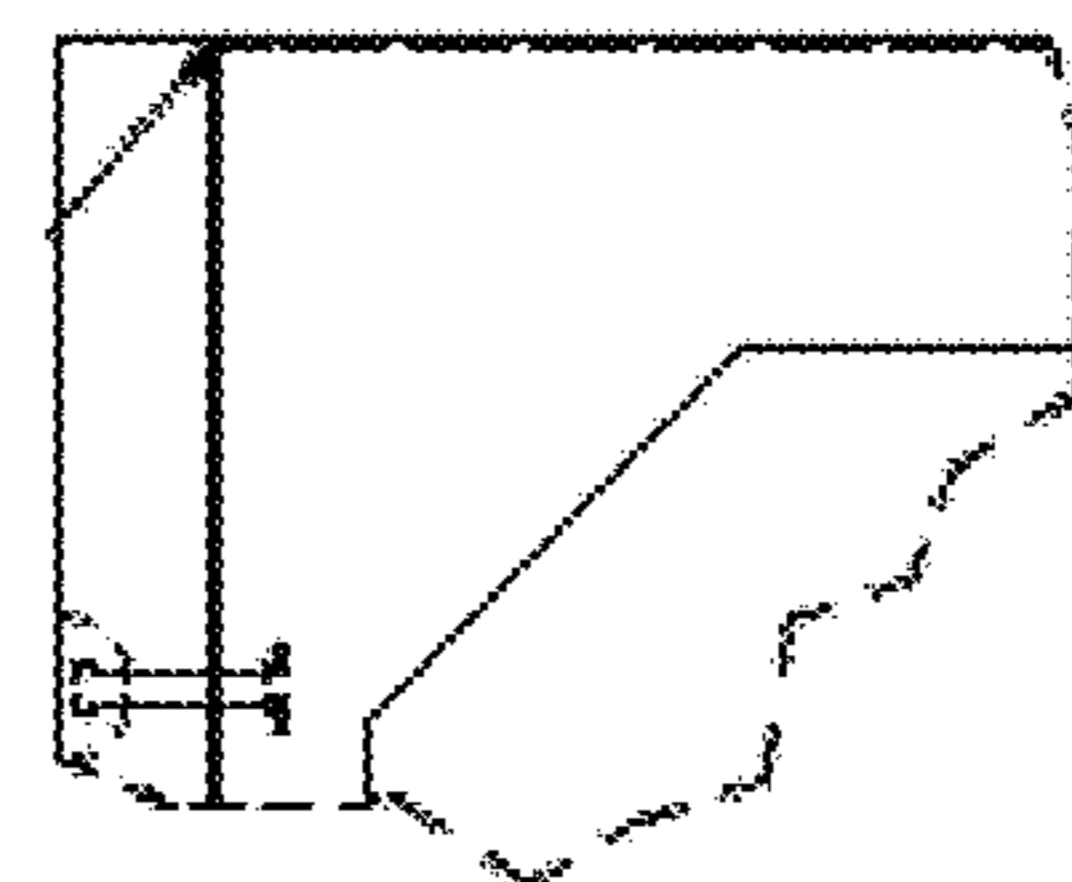
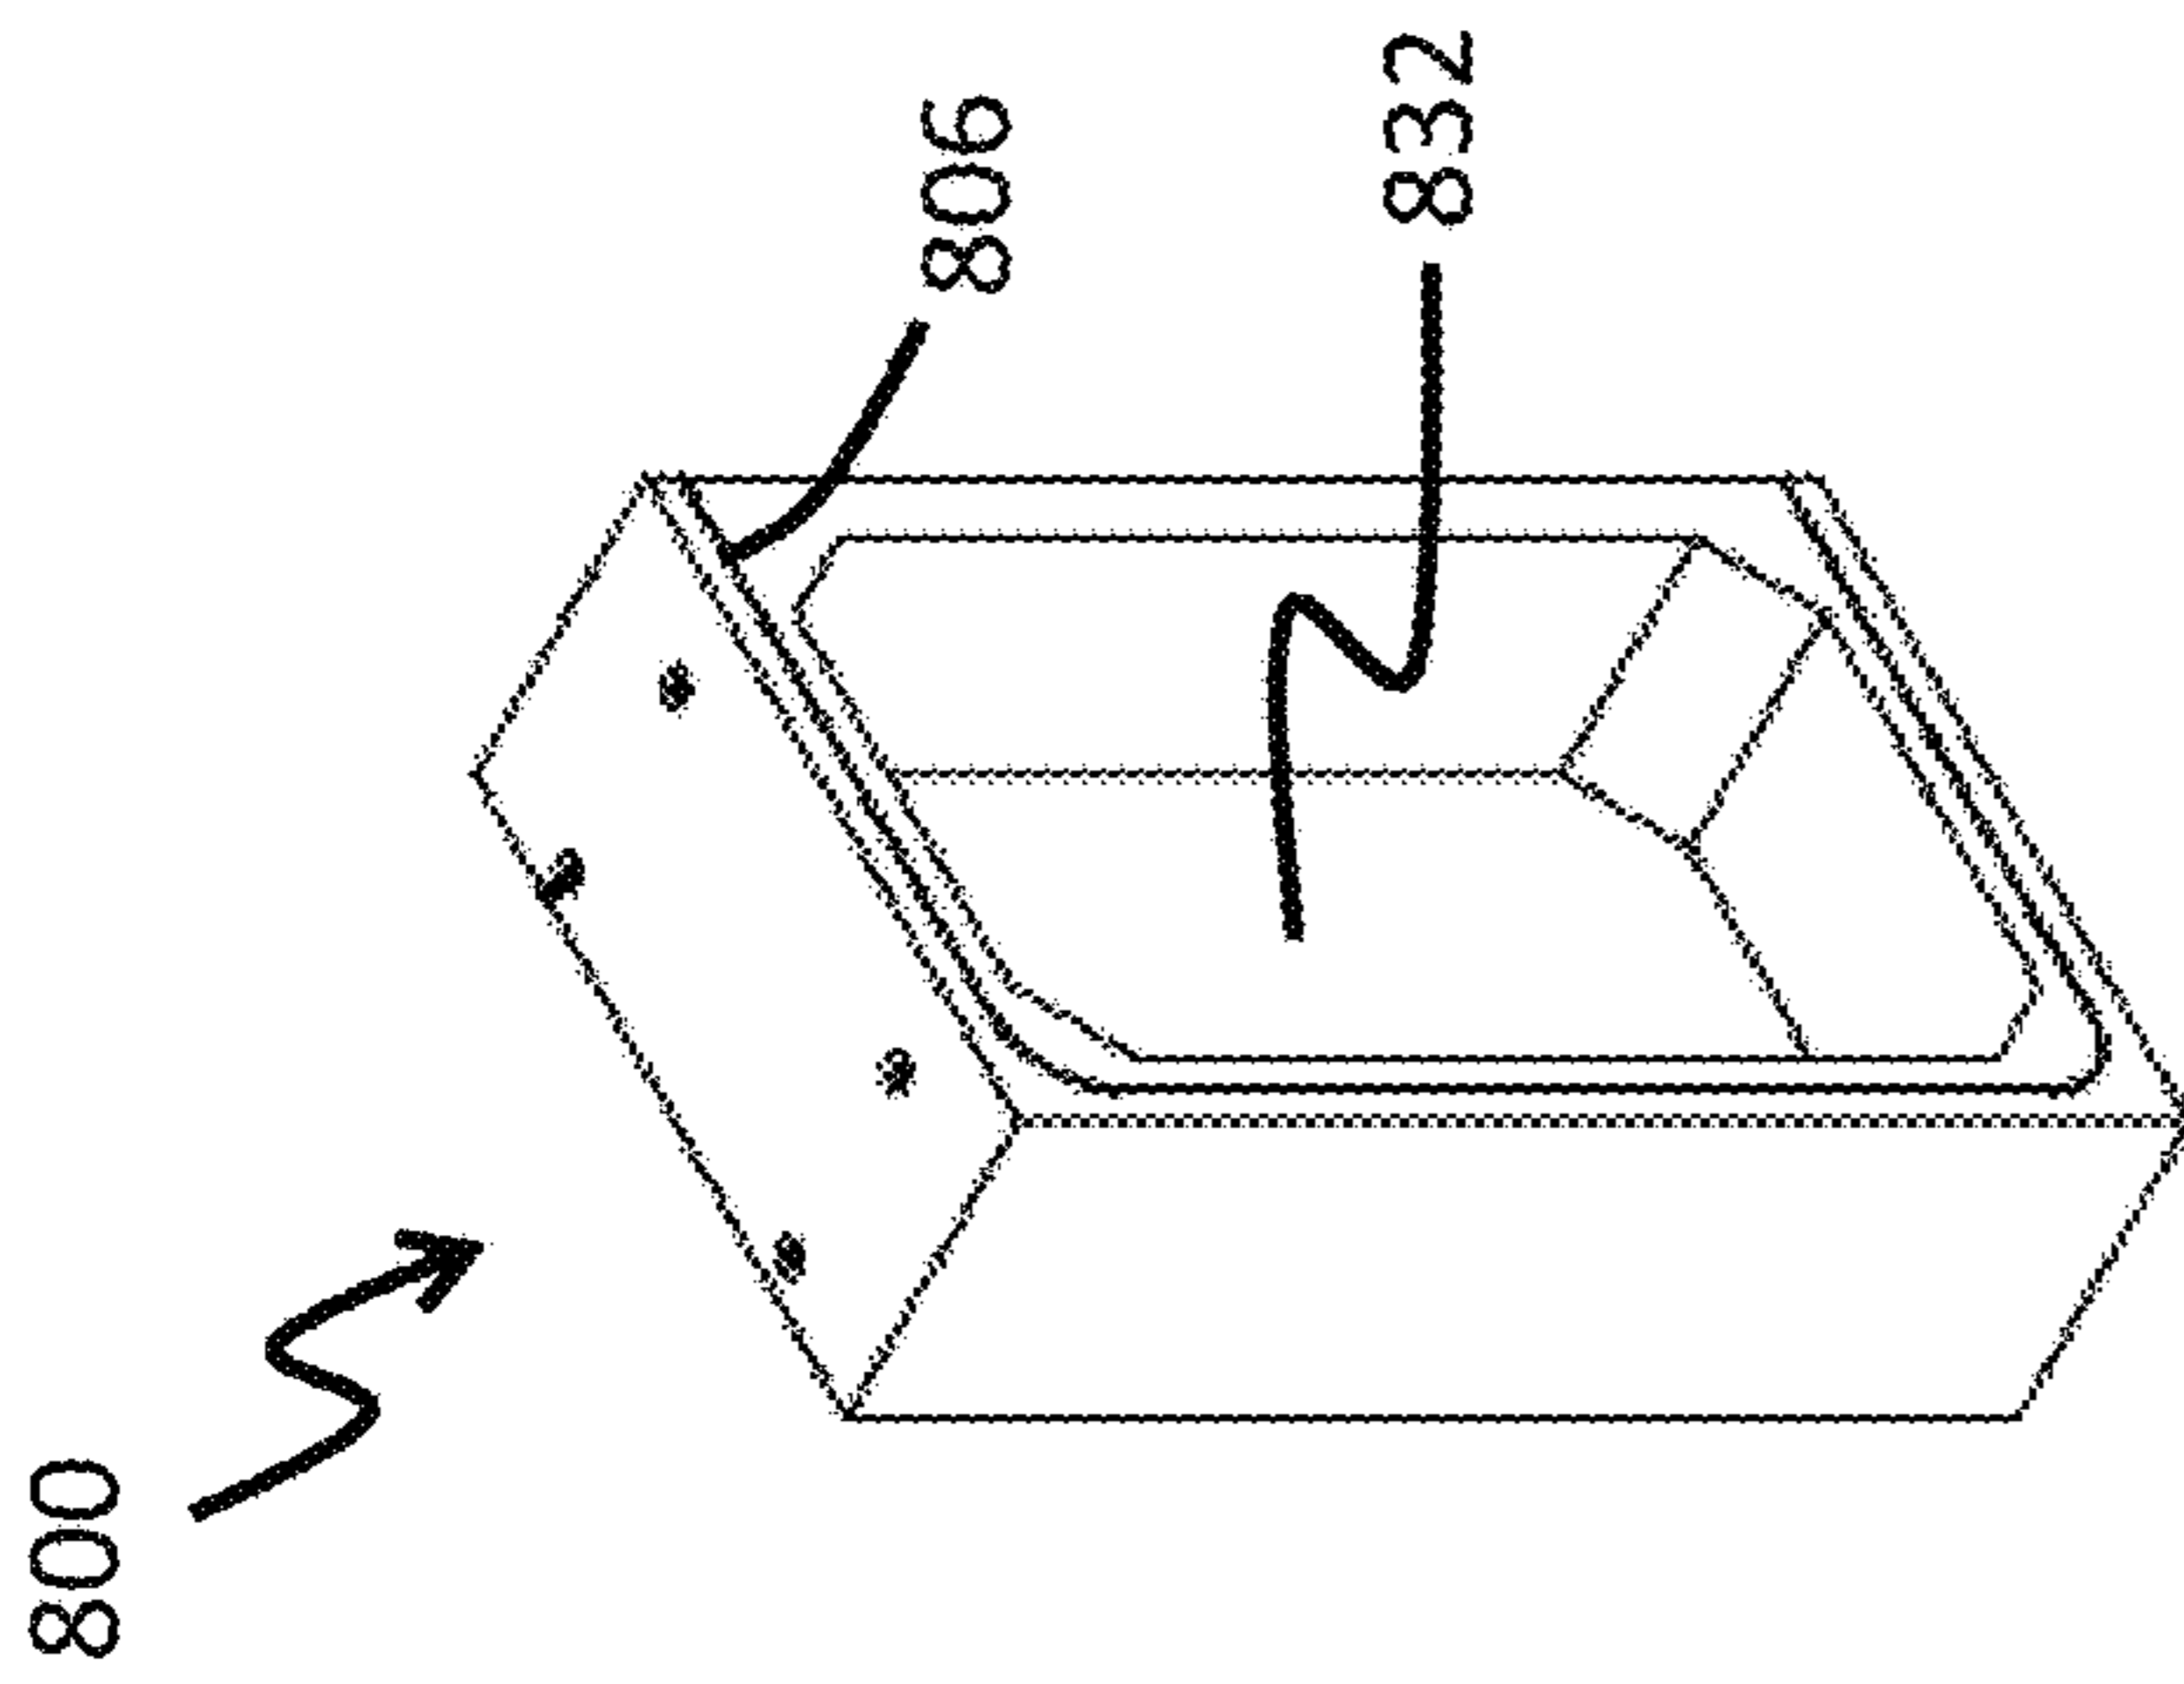
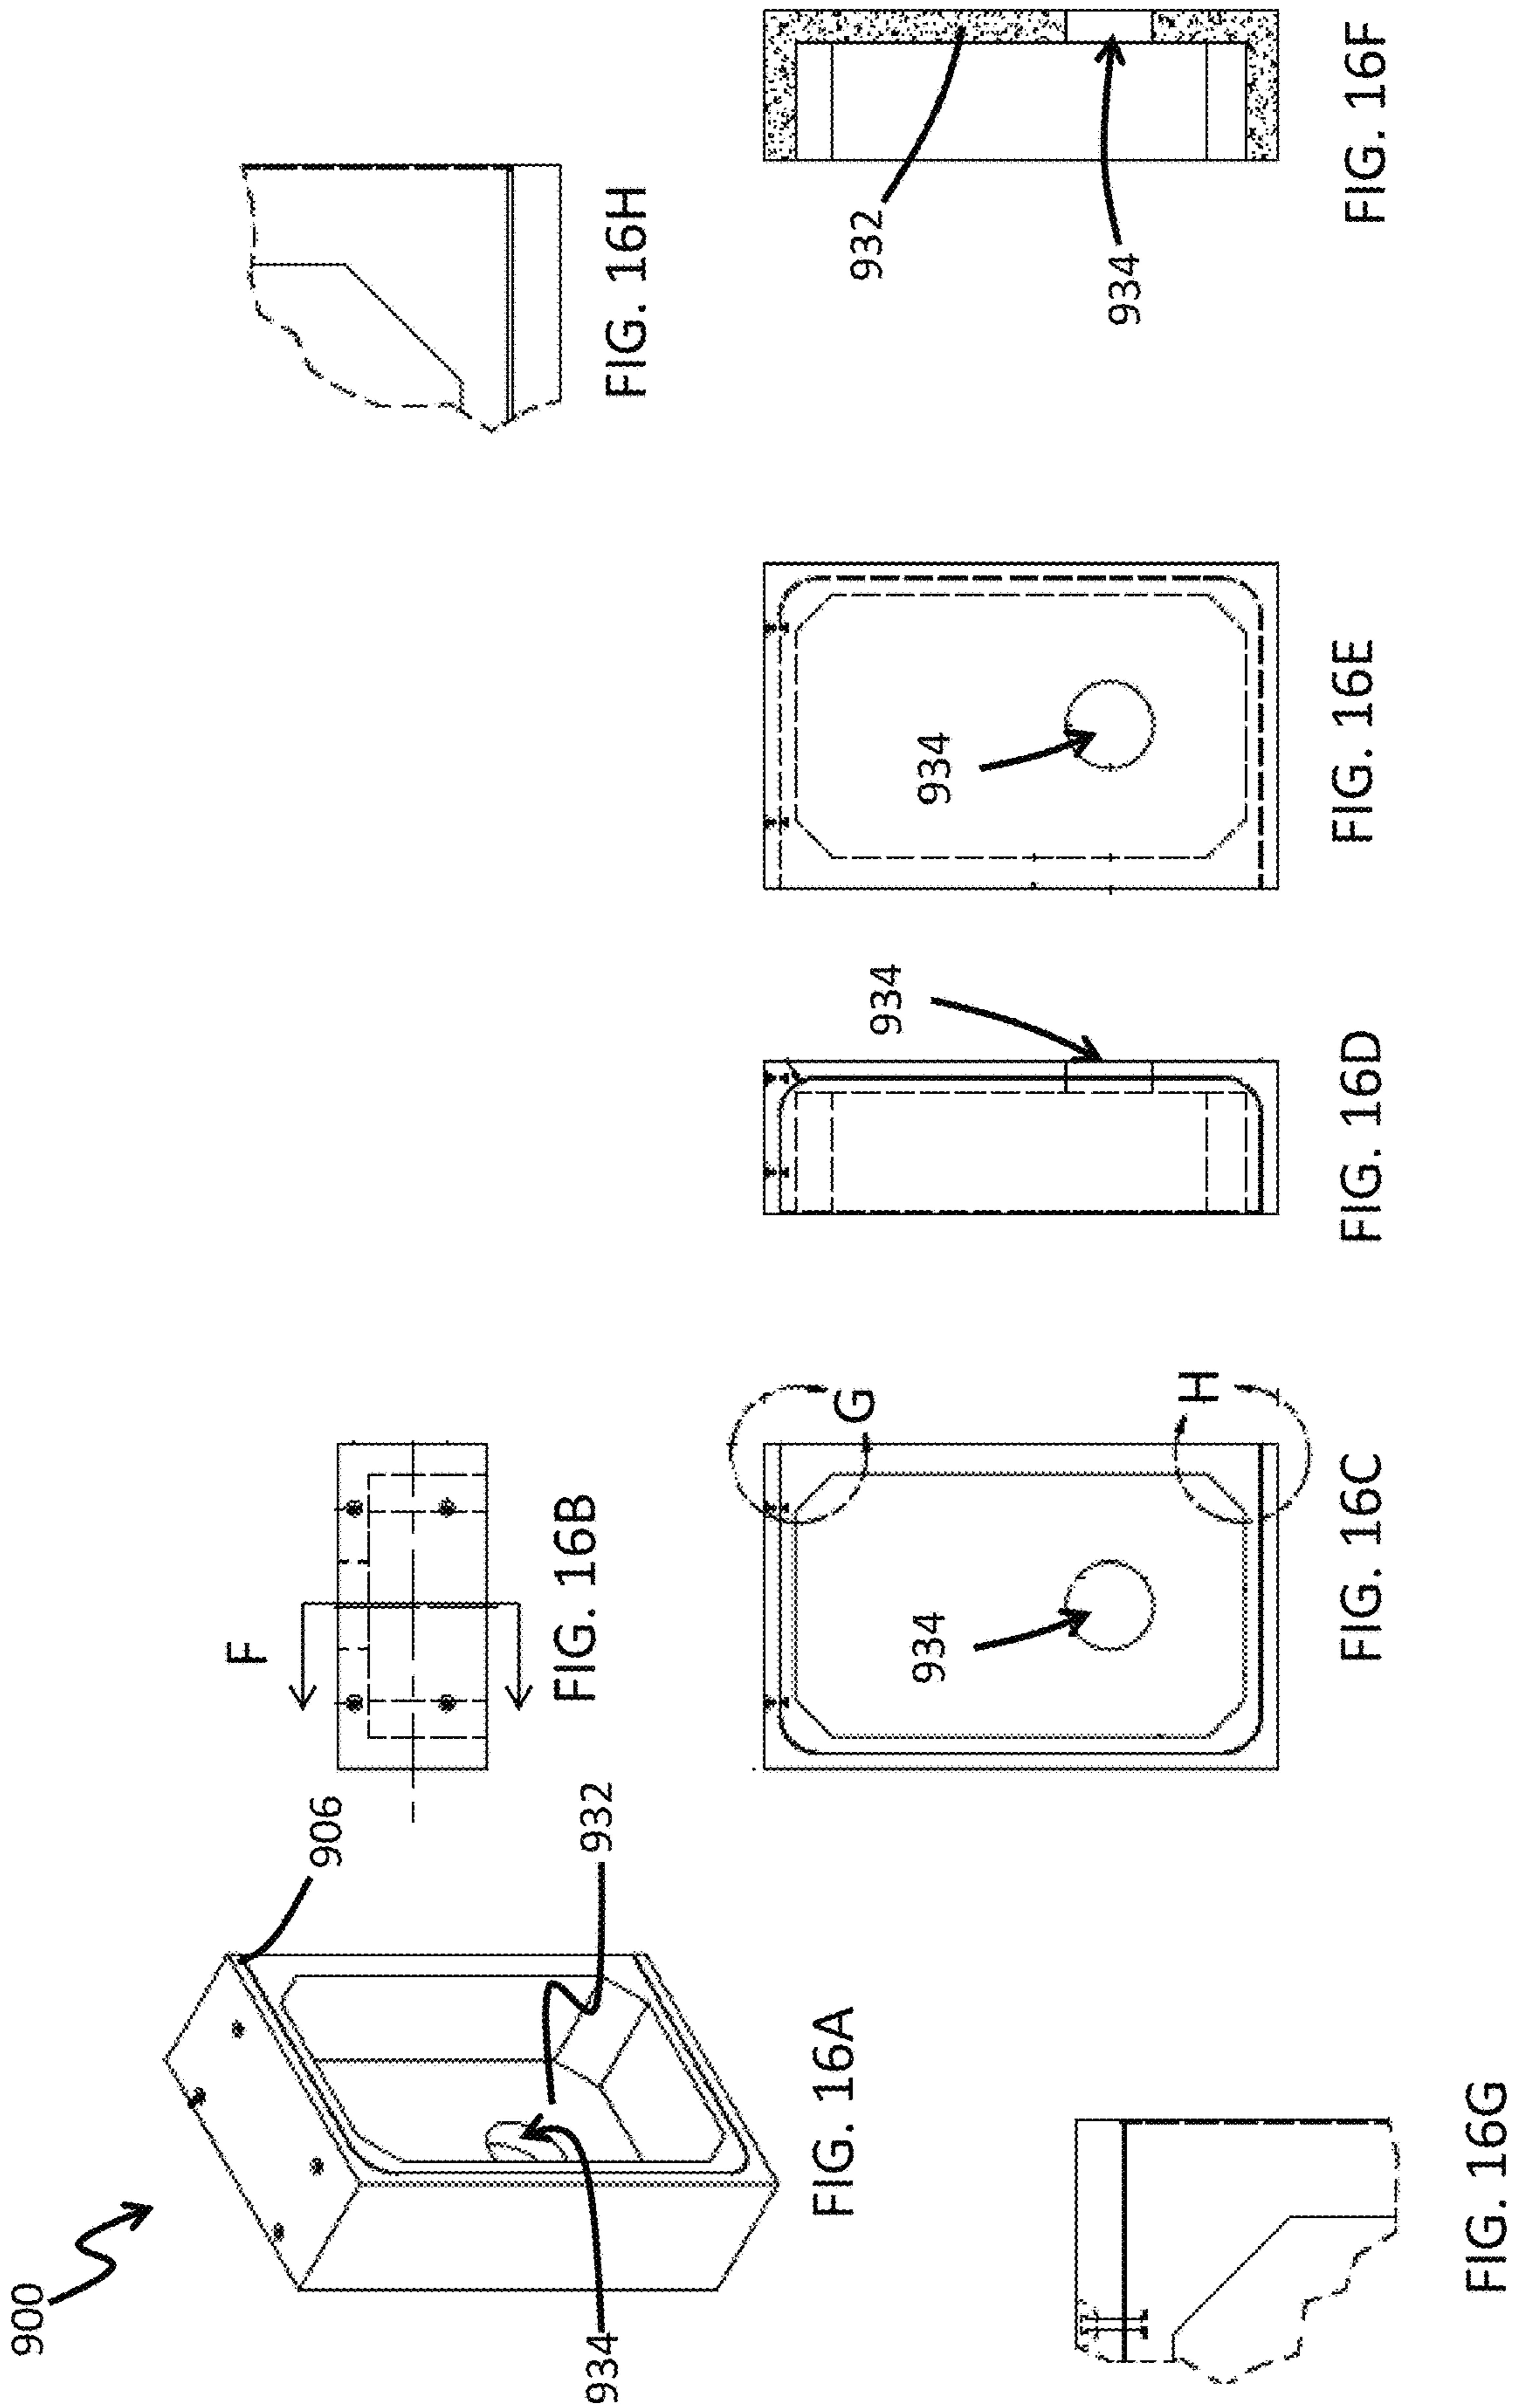


FIG. 14F





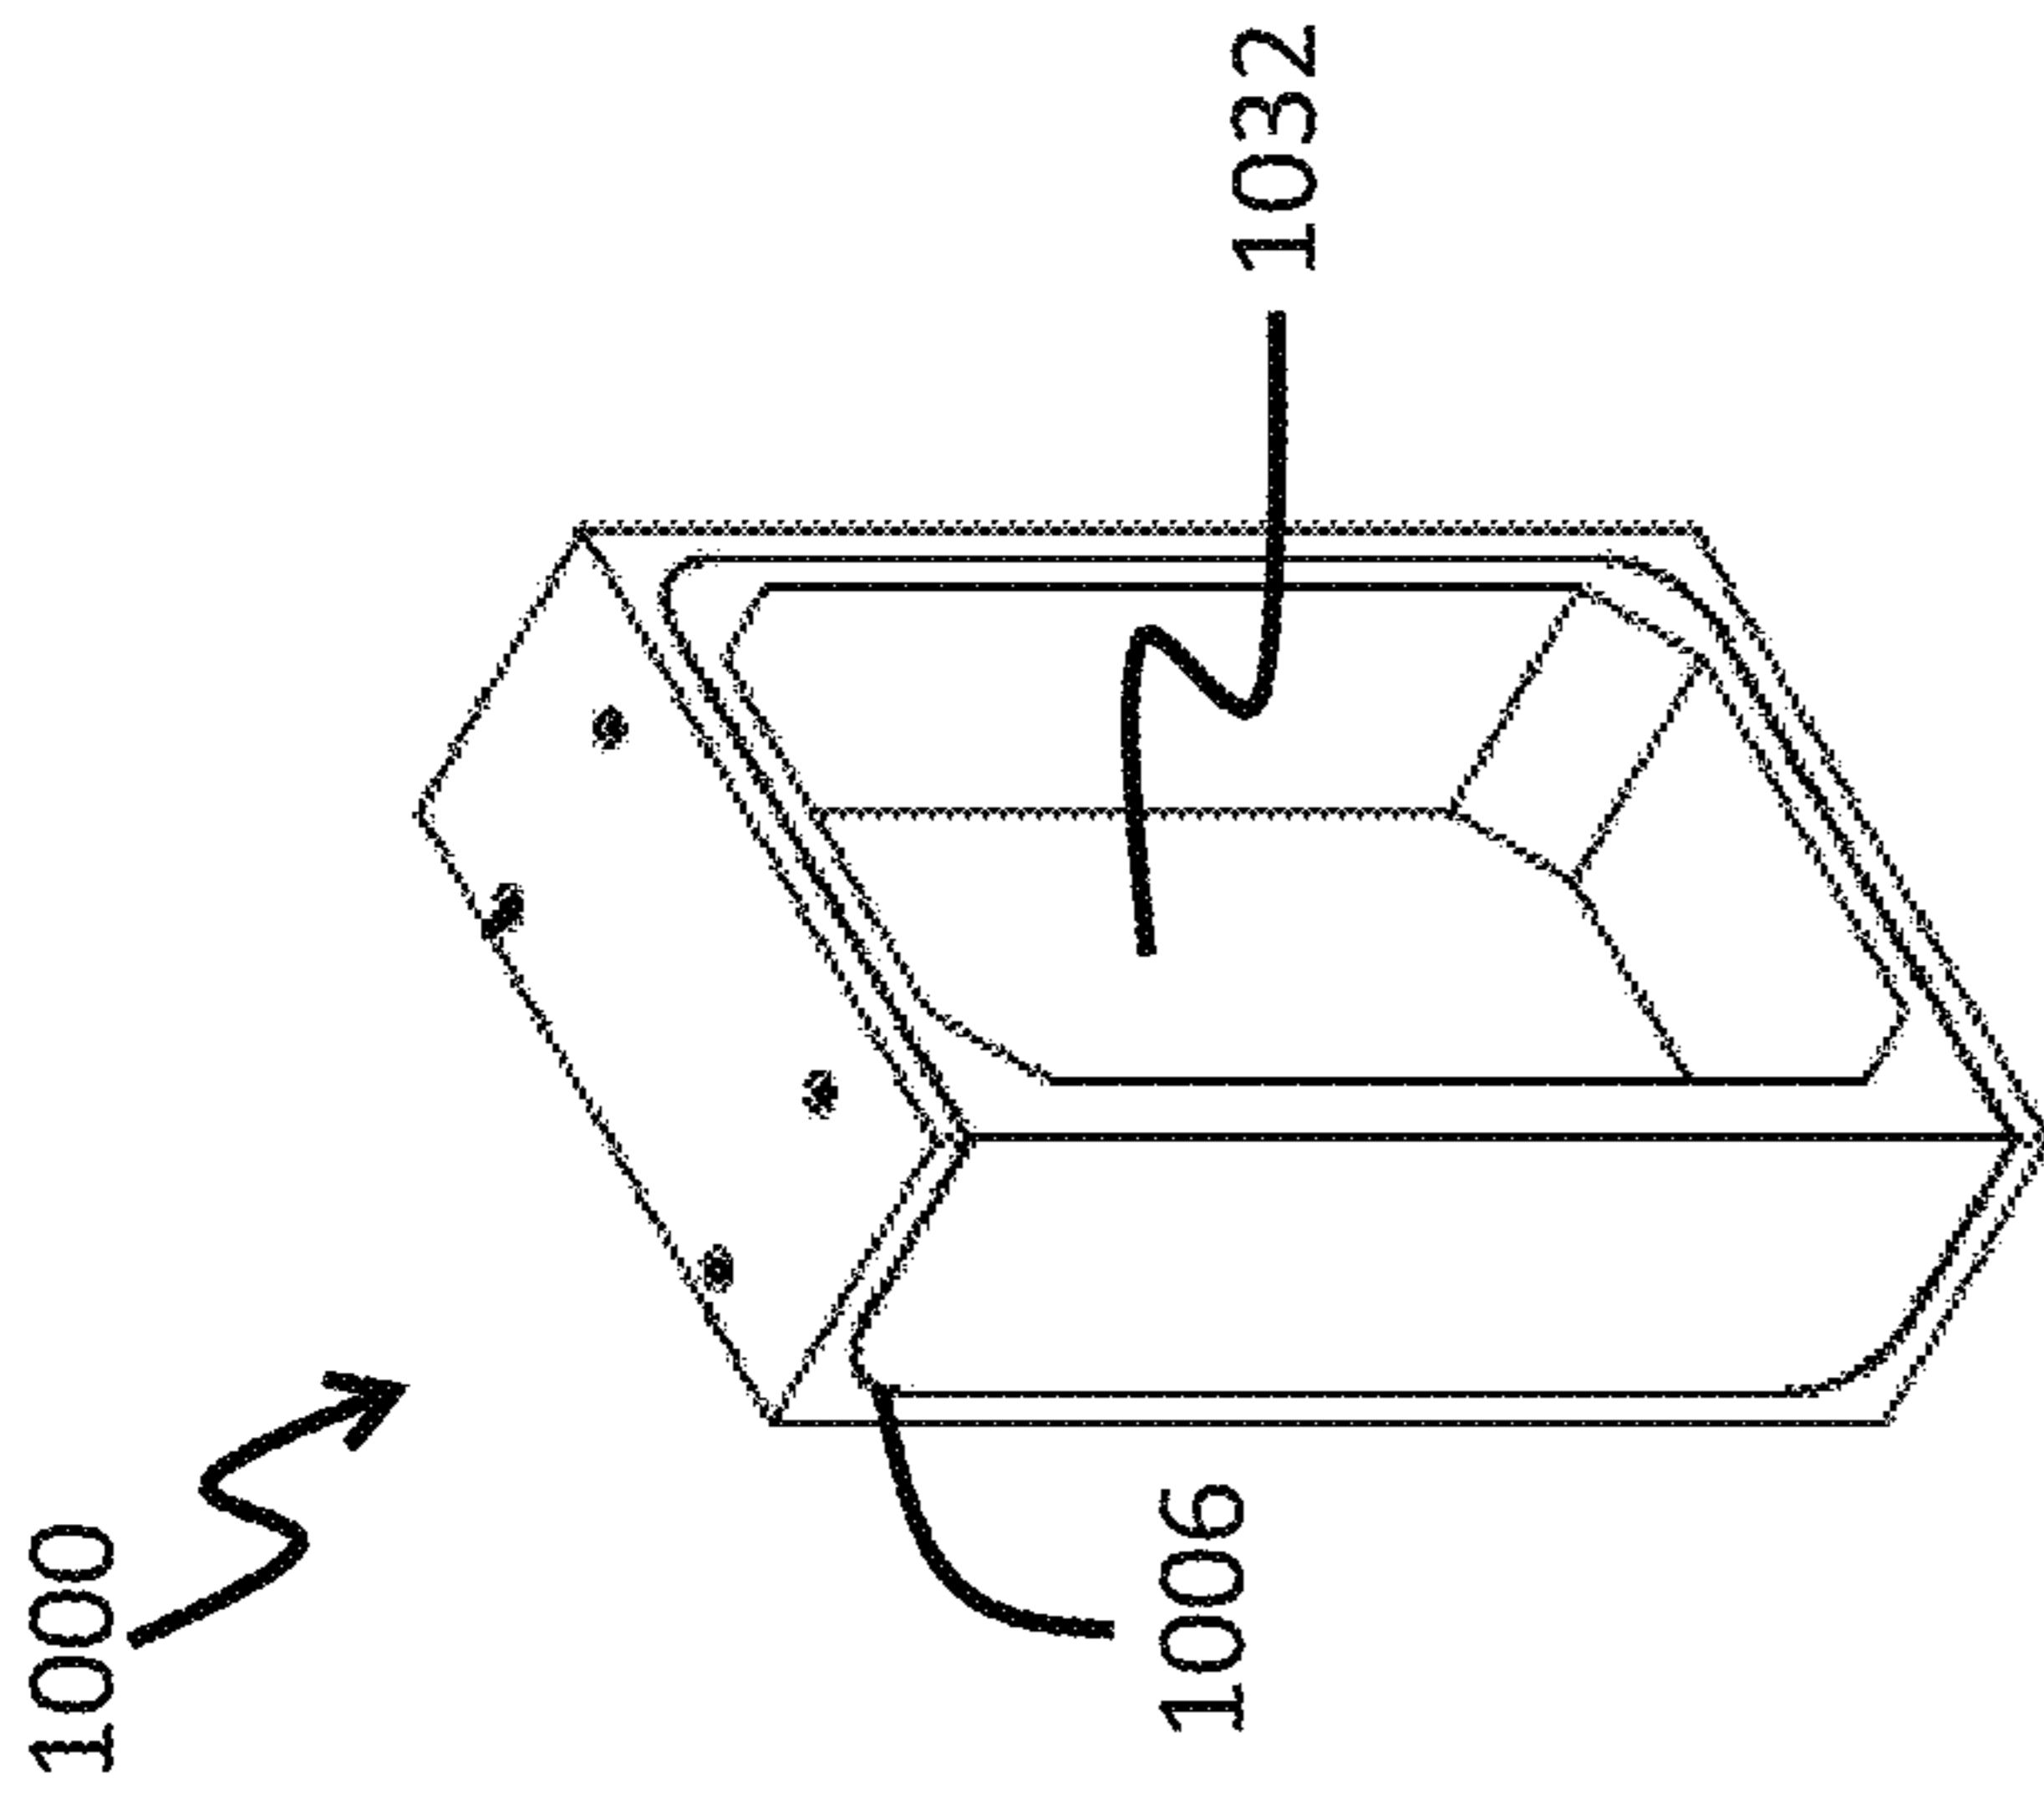


FIG. 17A

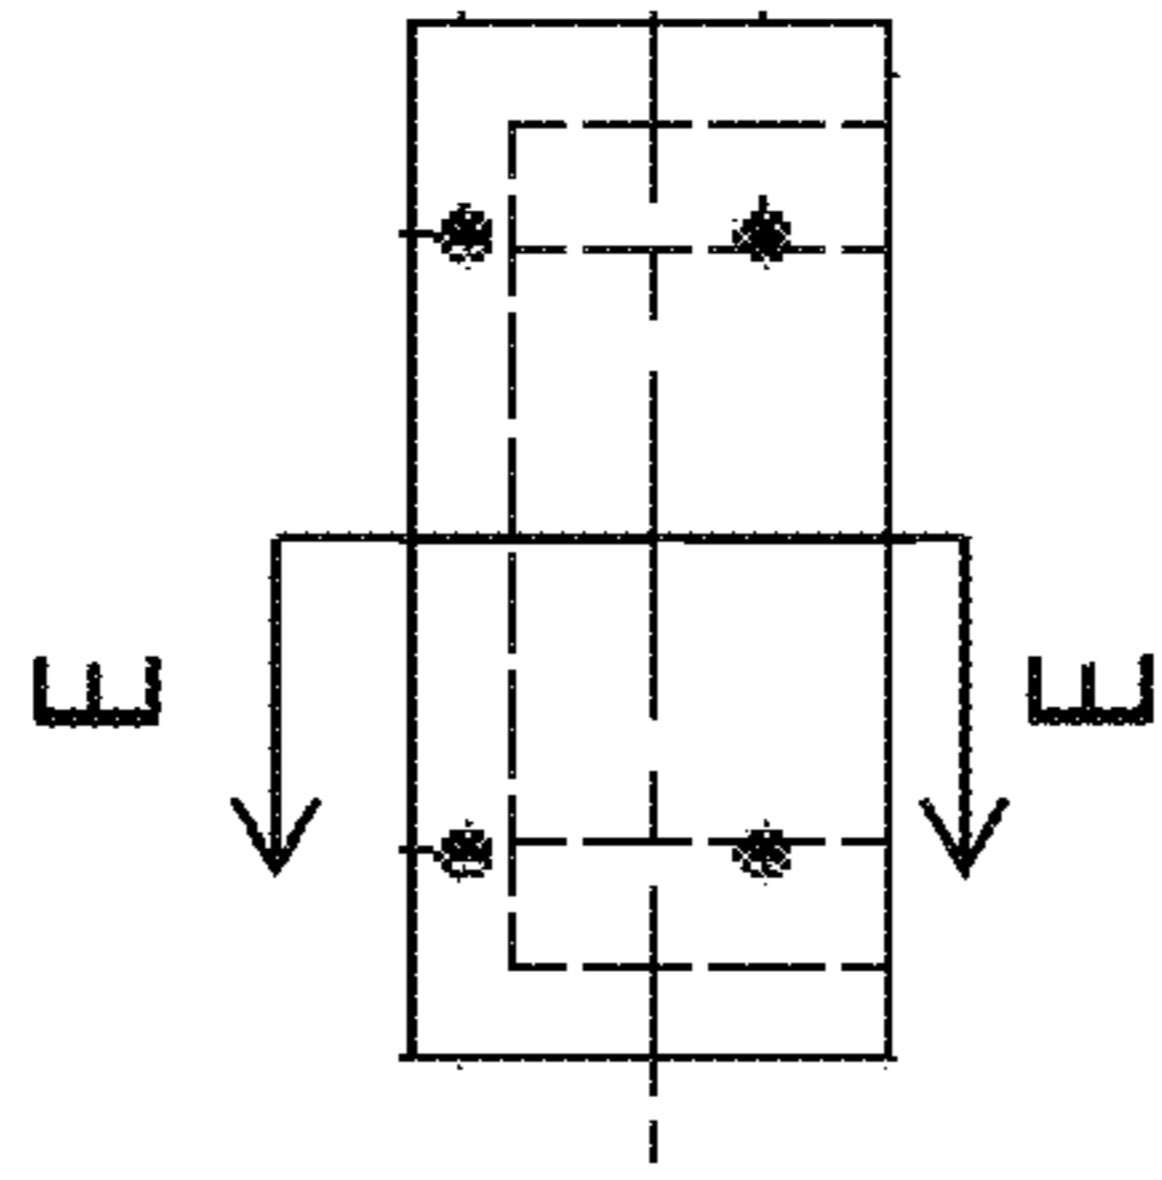


FIG. 17B

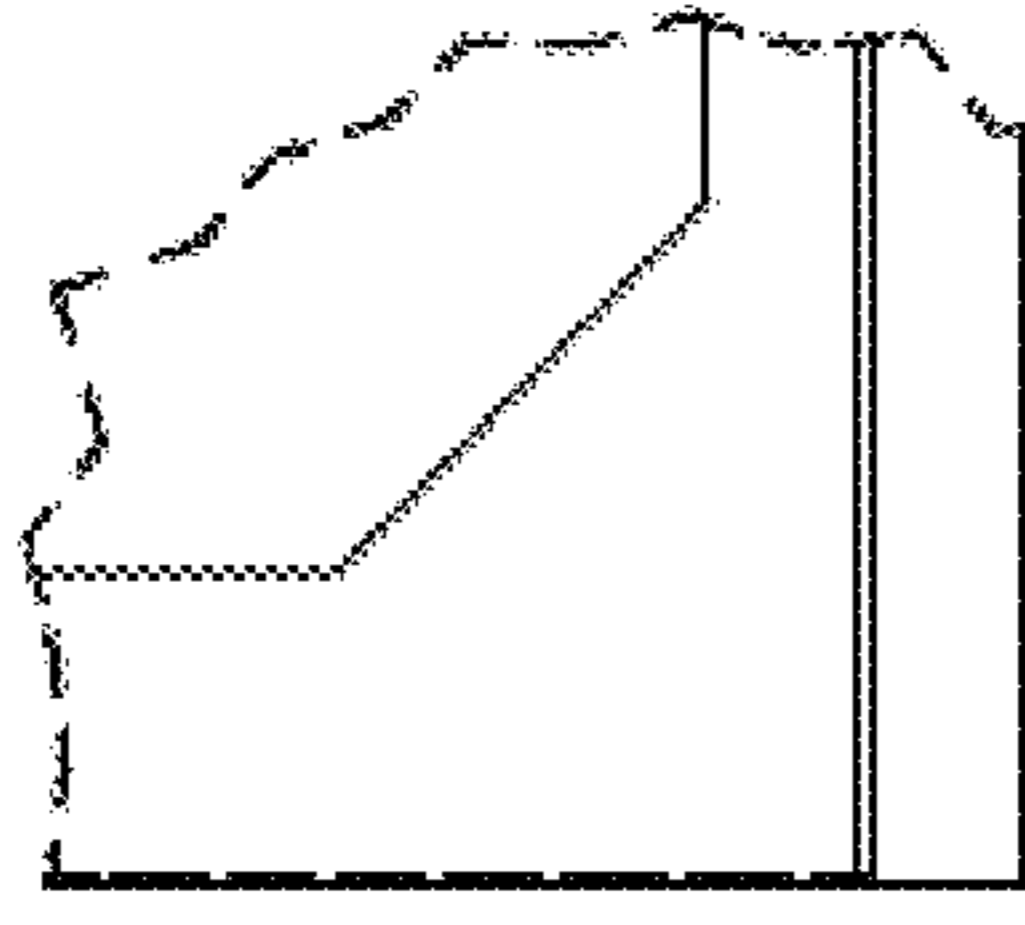


FIG. 17G

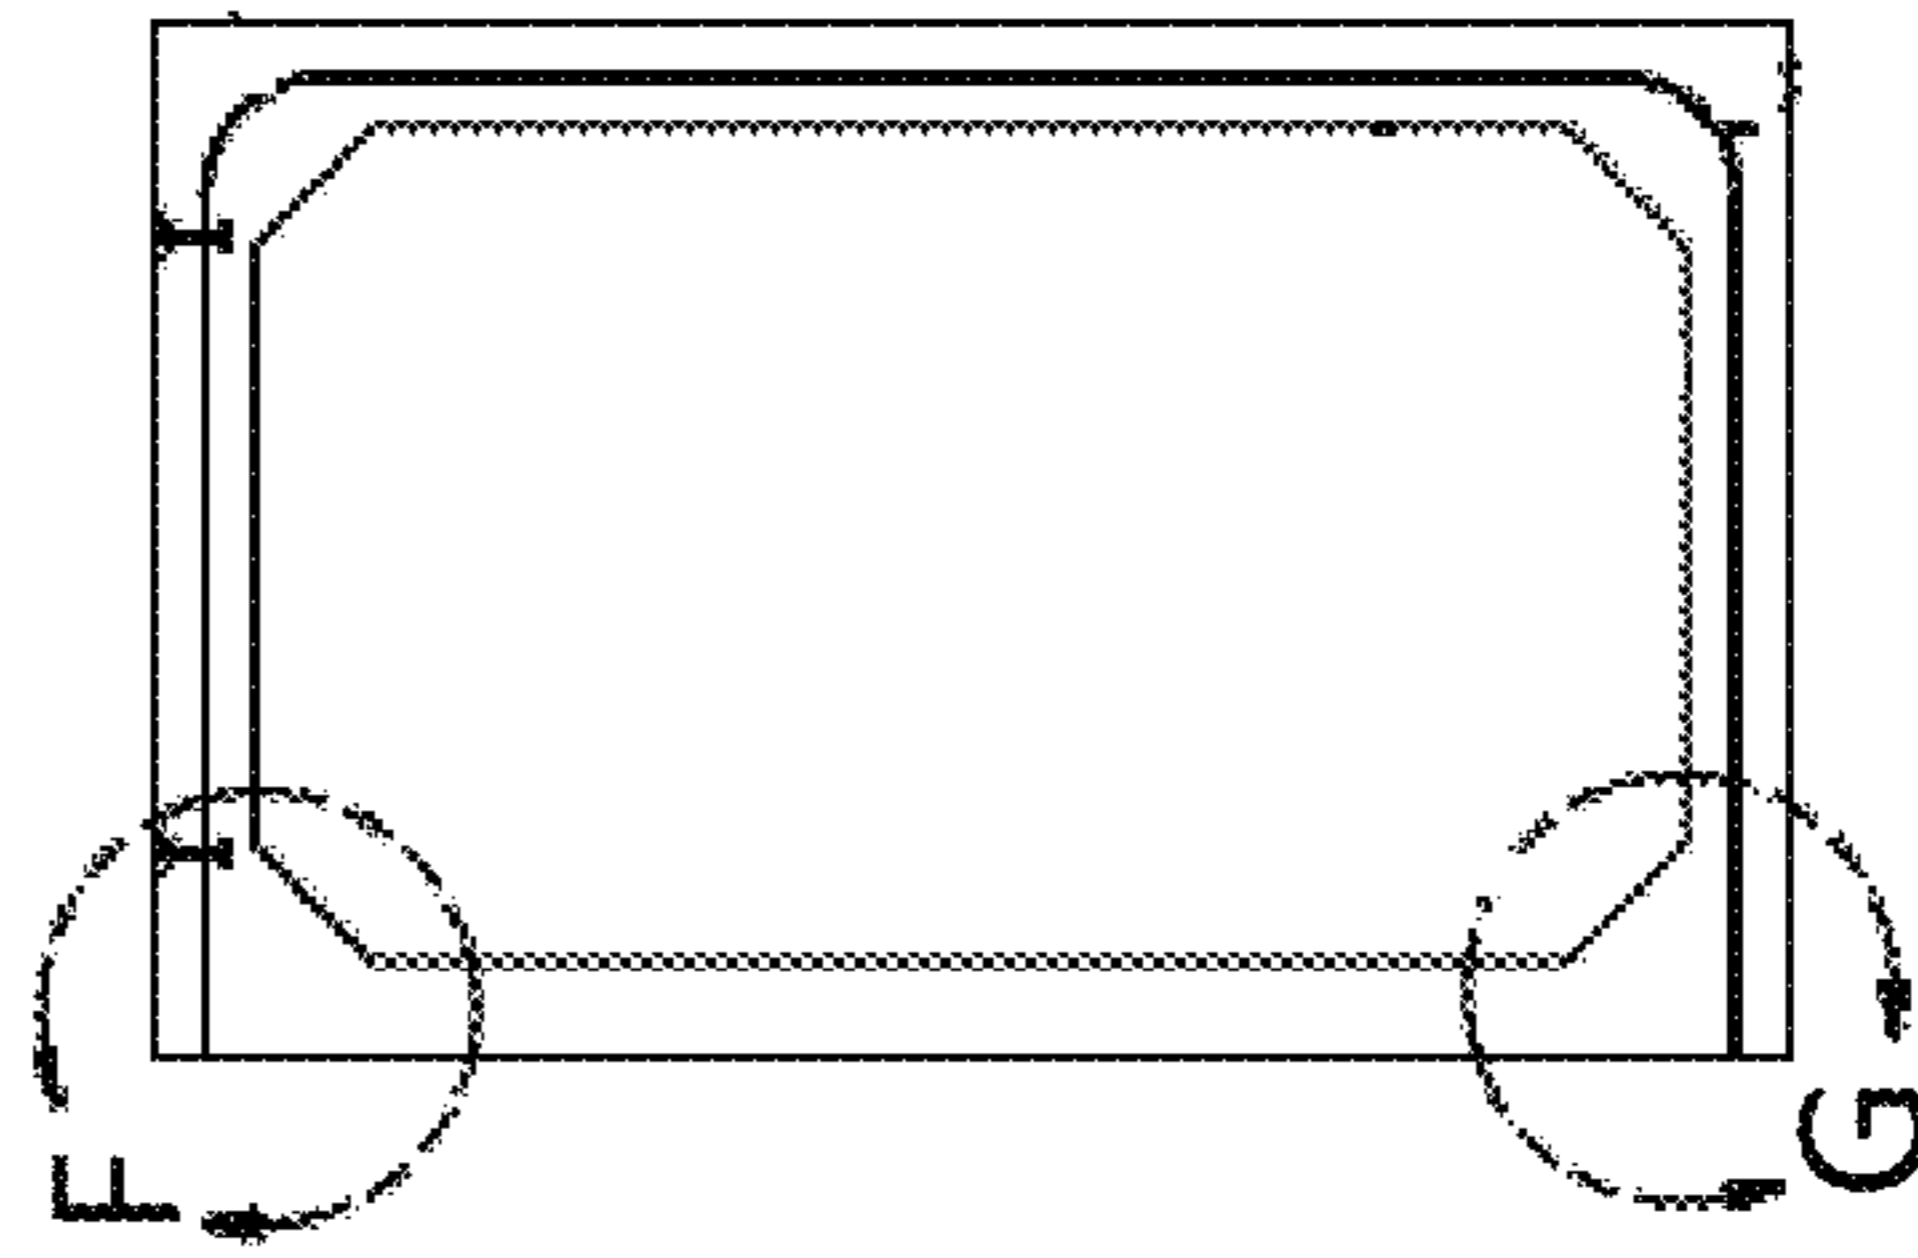


FIG. 17C

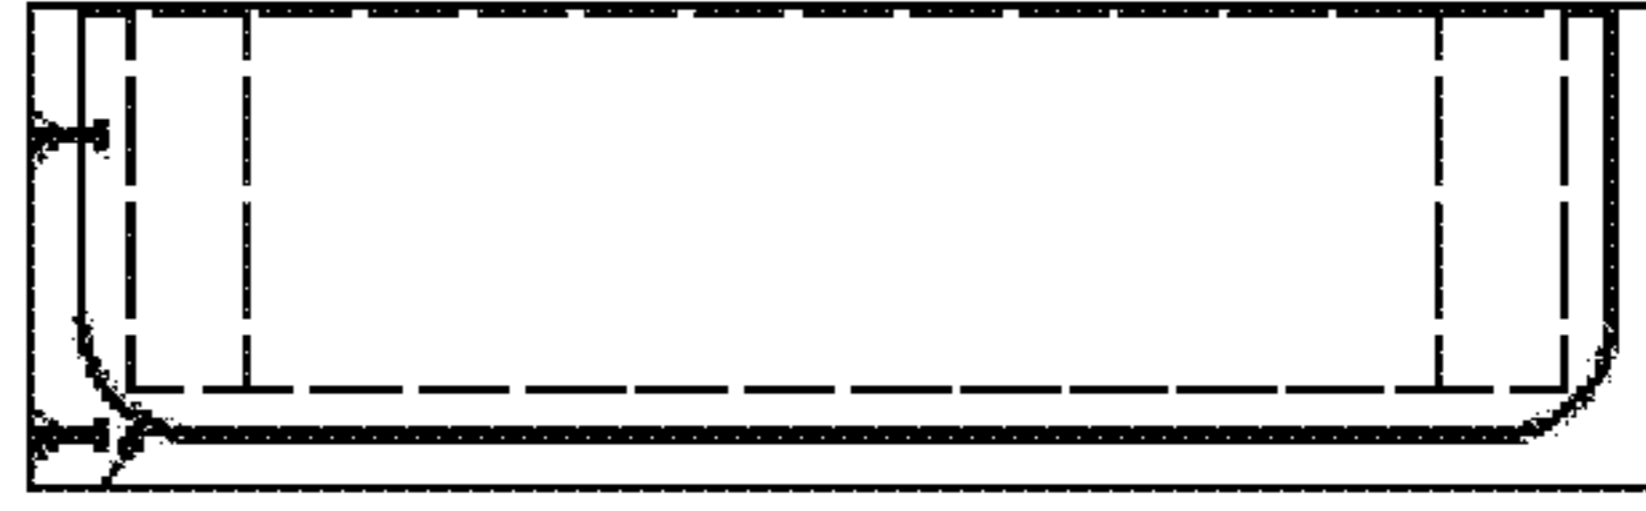


FIG. 17D

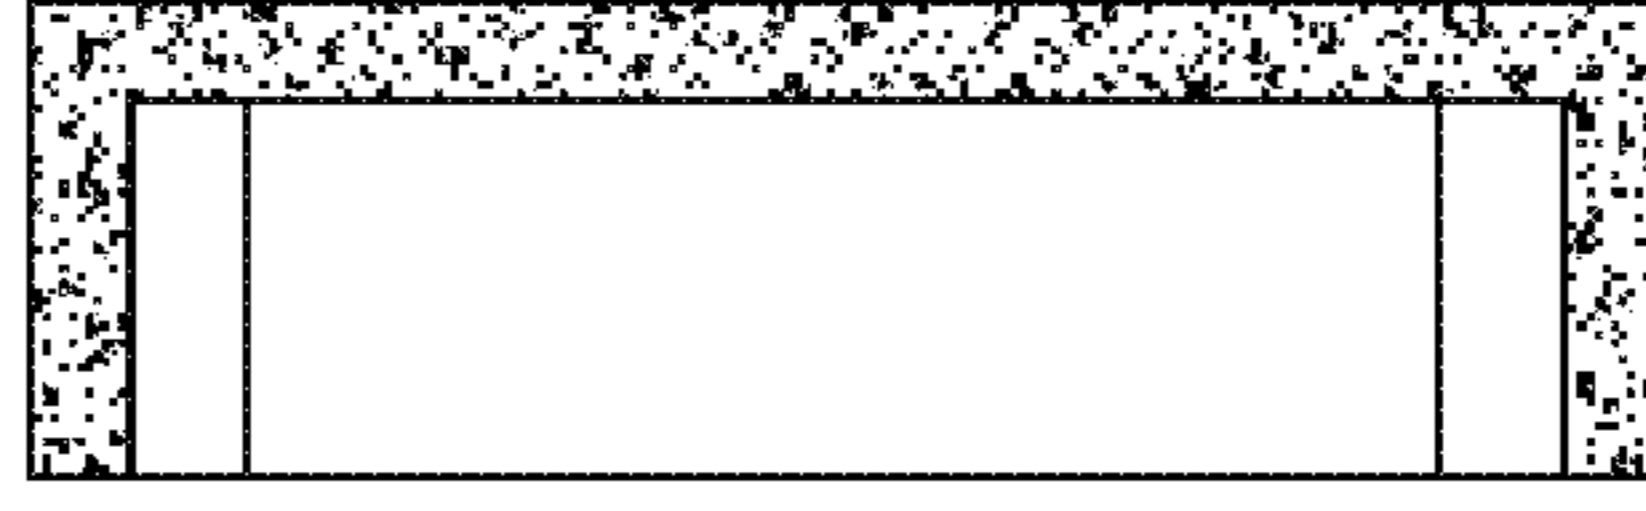


FIG. 17E

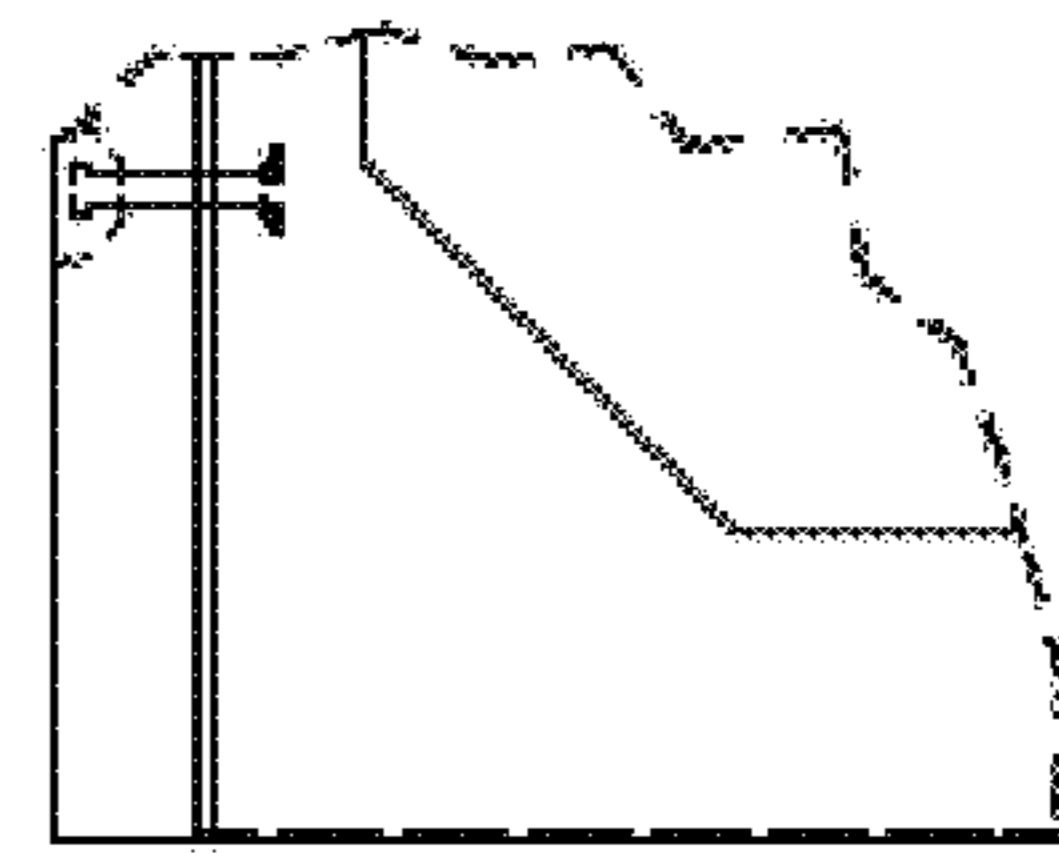


FIG. 17F

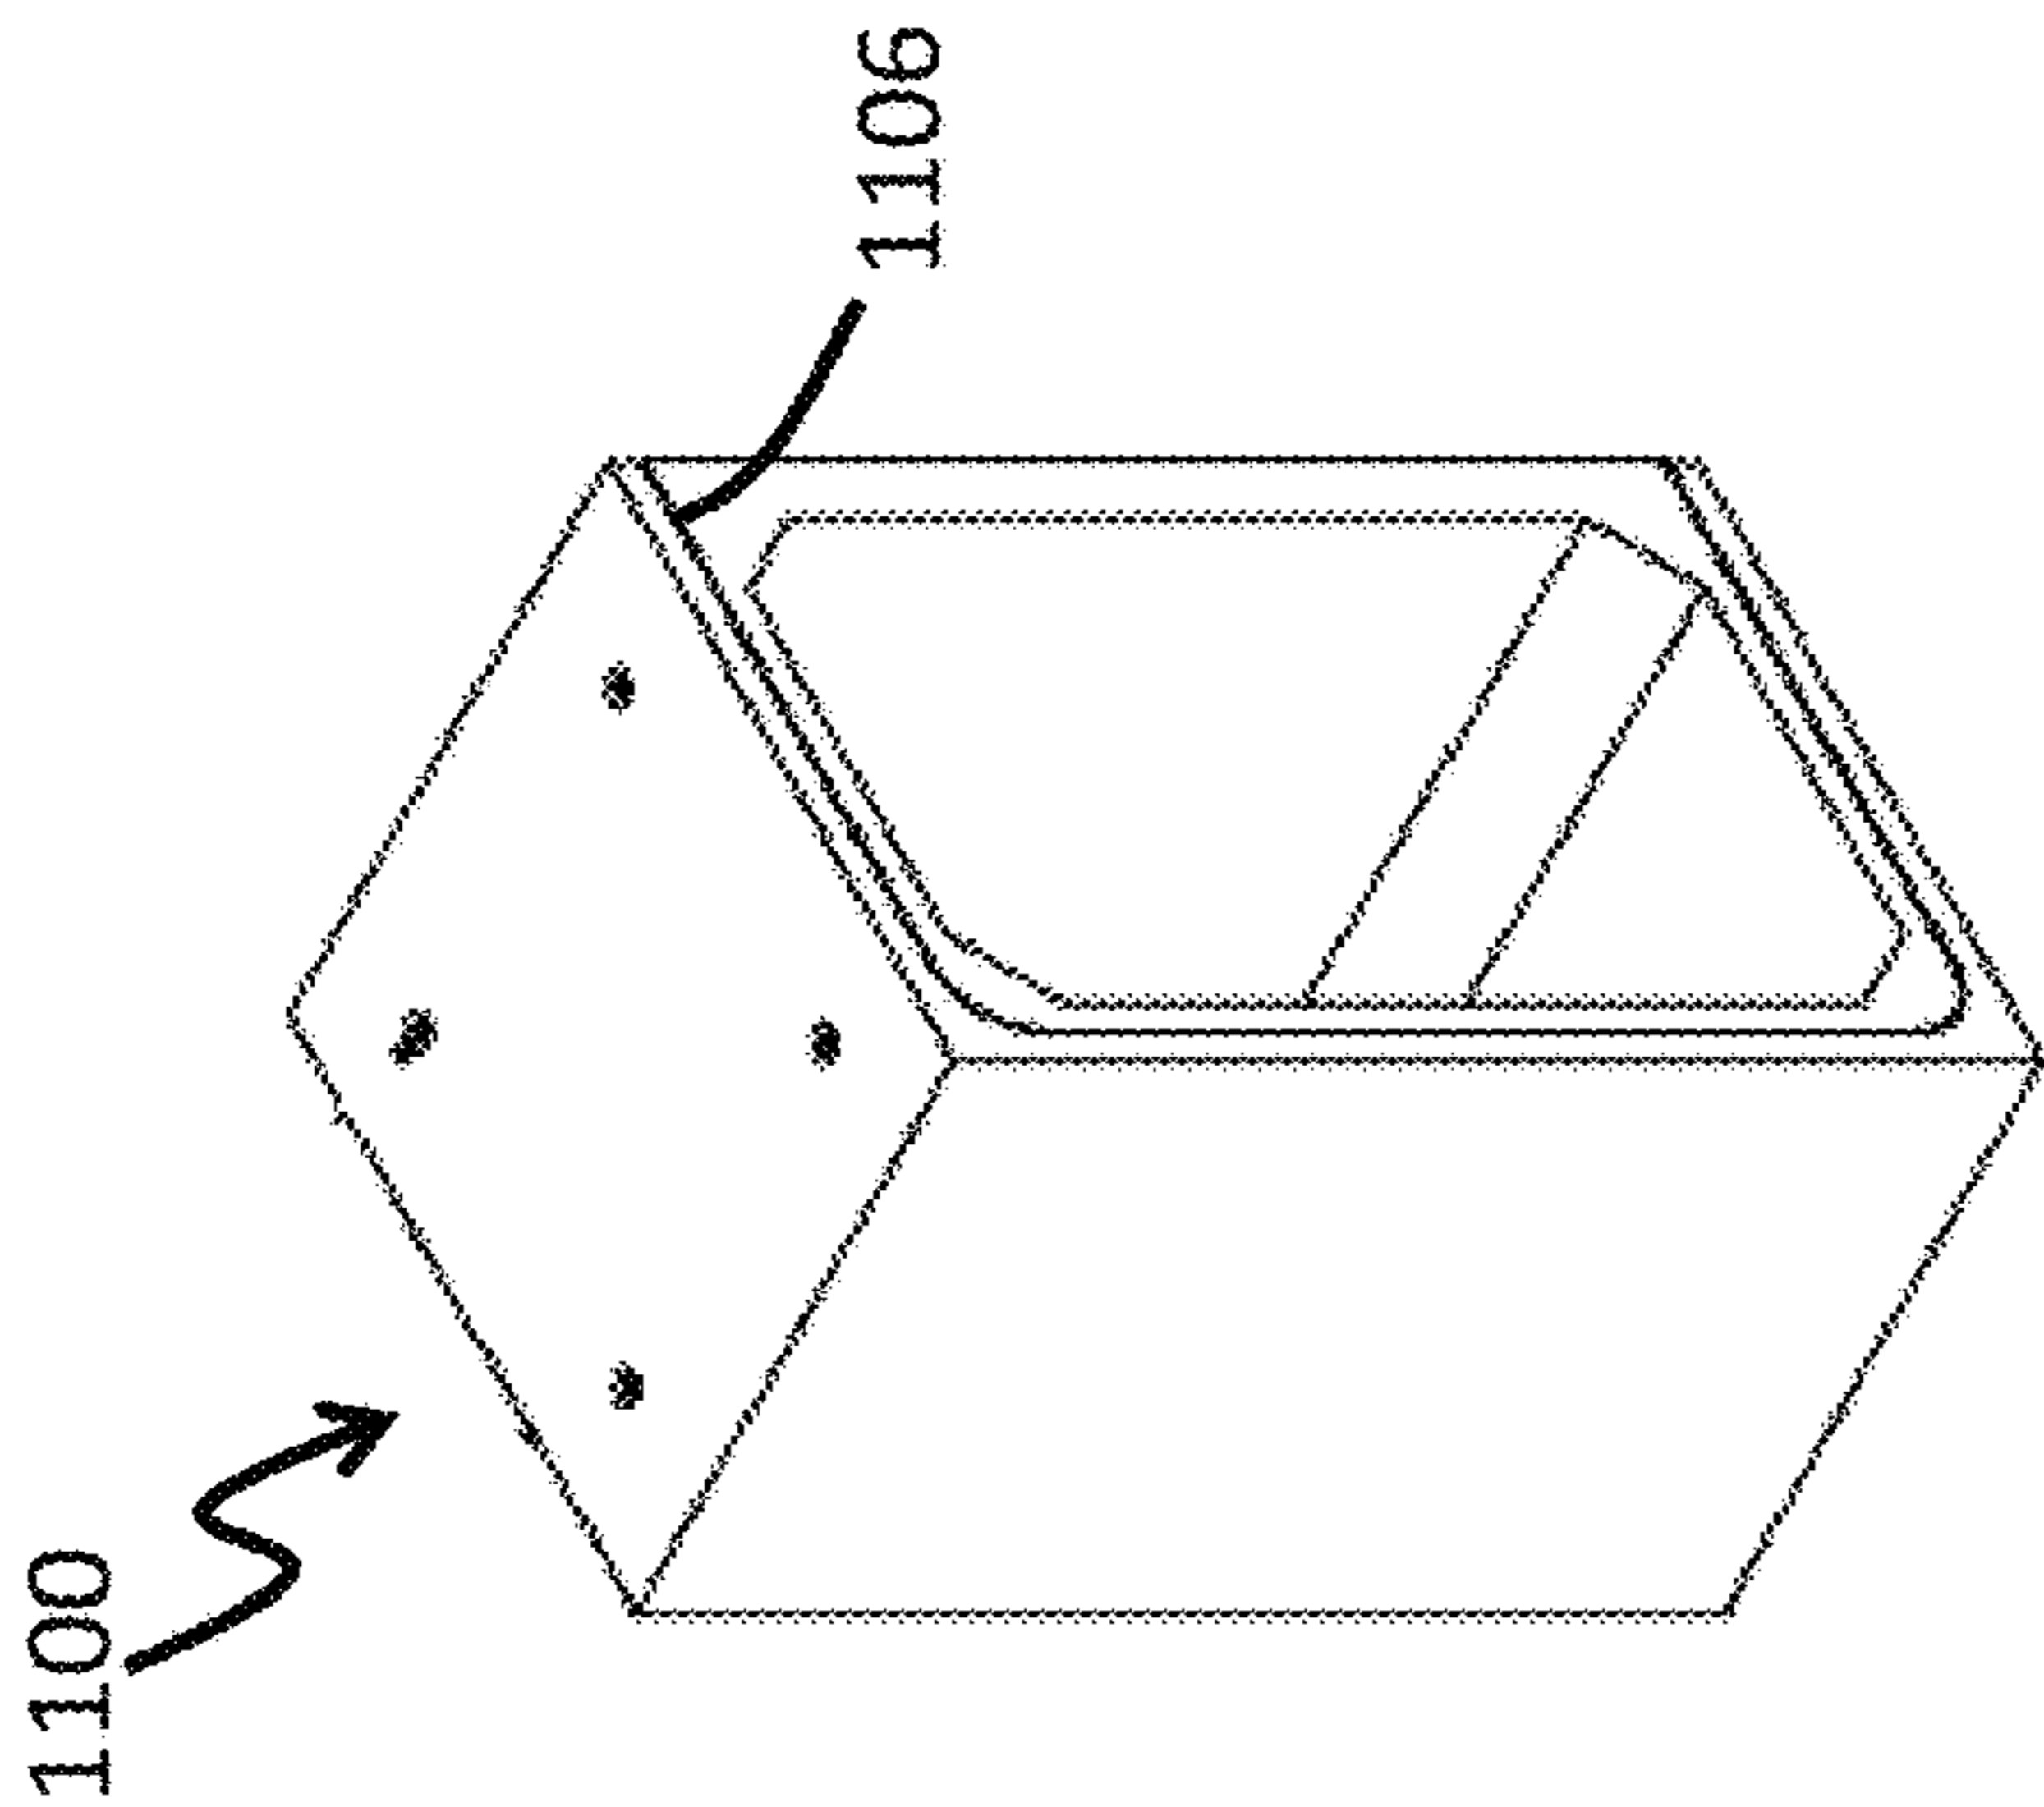


FIG. 18A

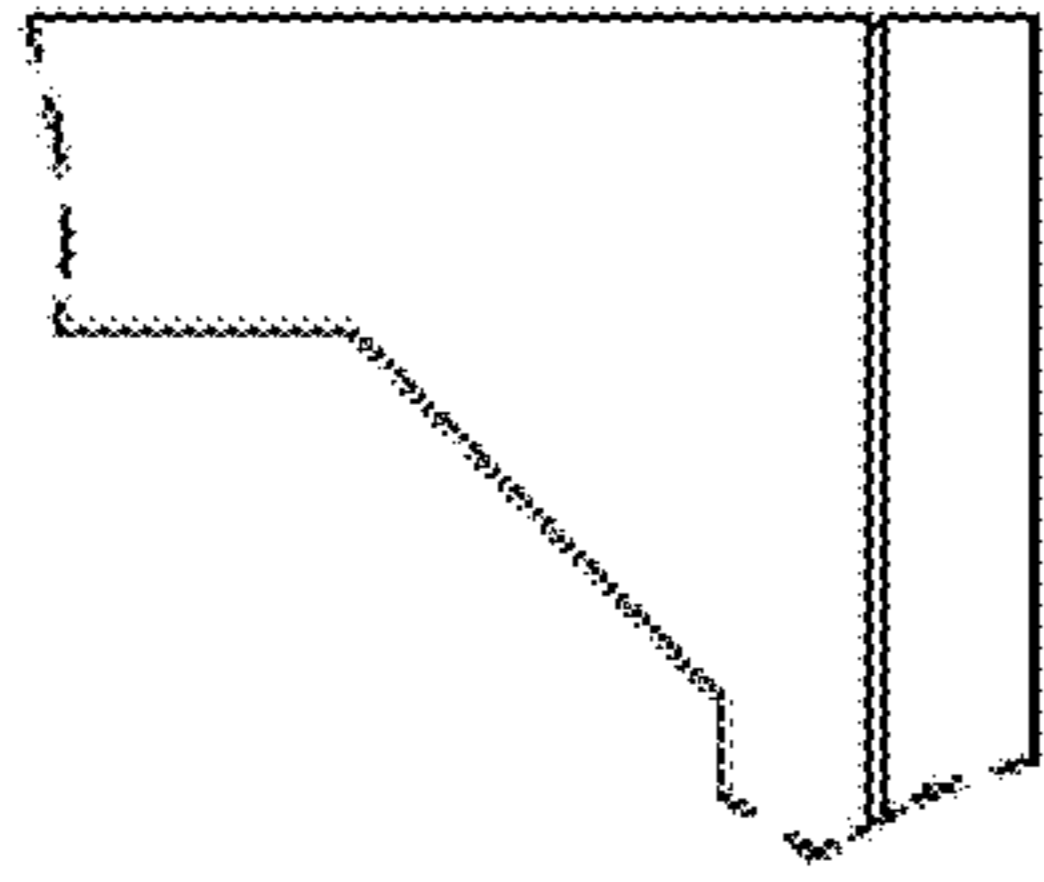


FIG. 18G

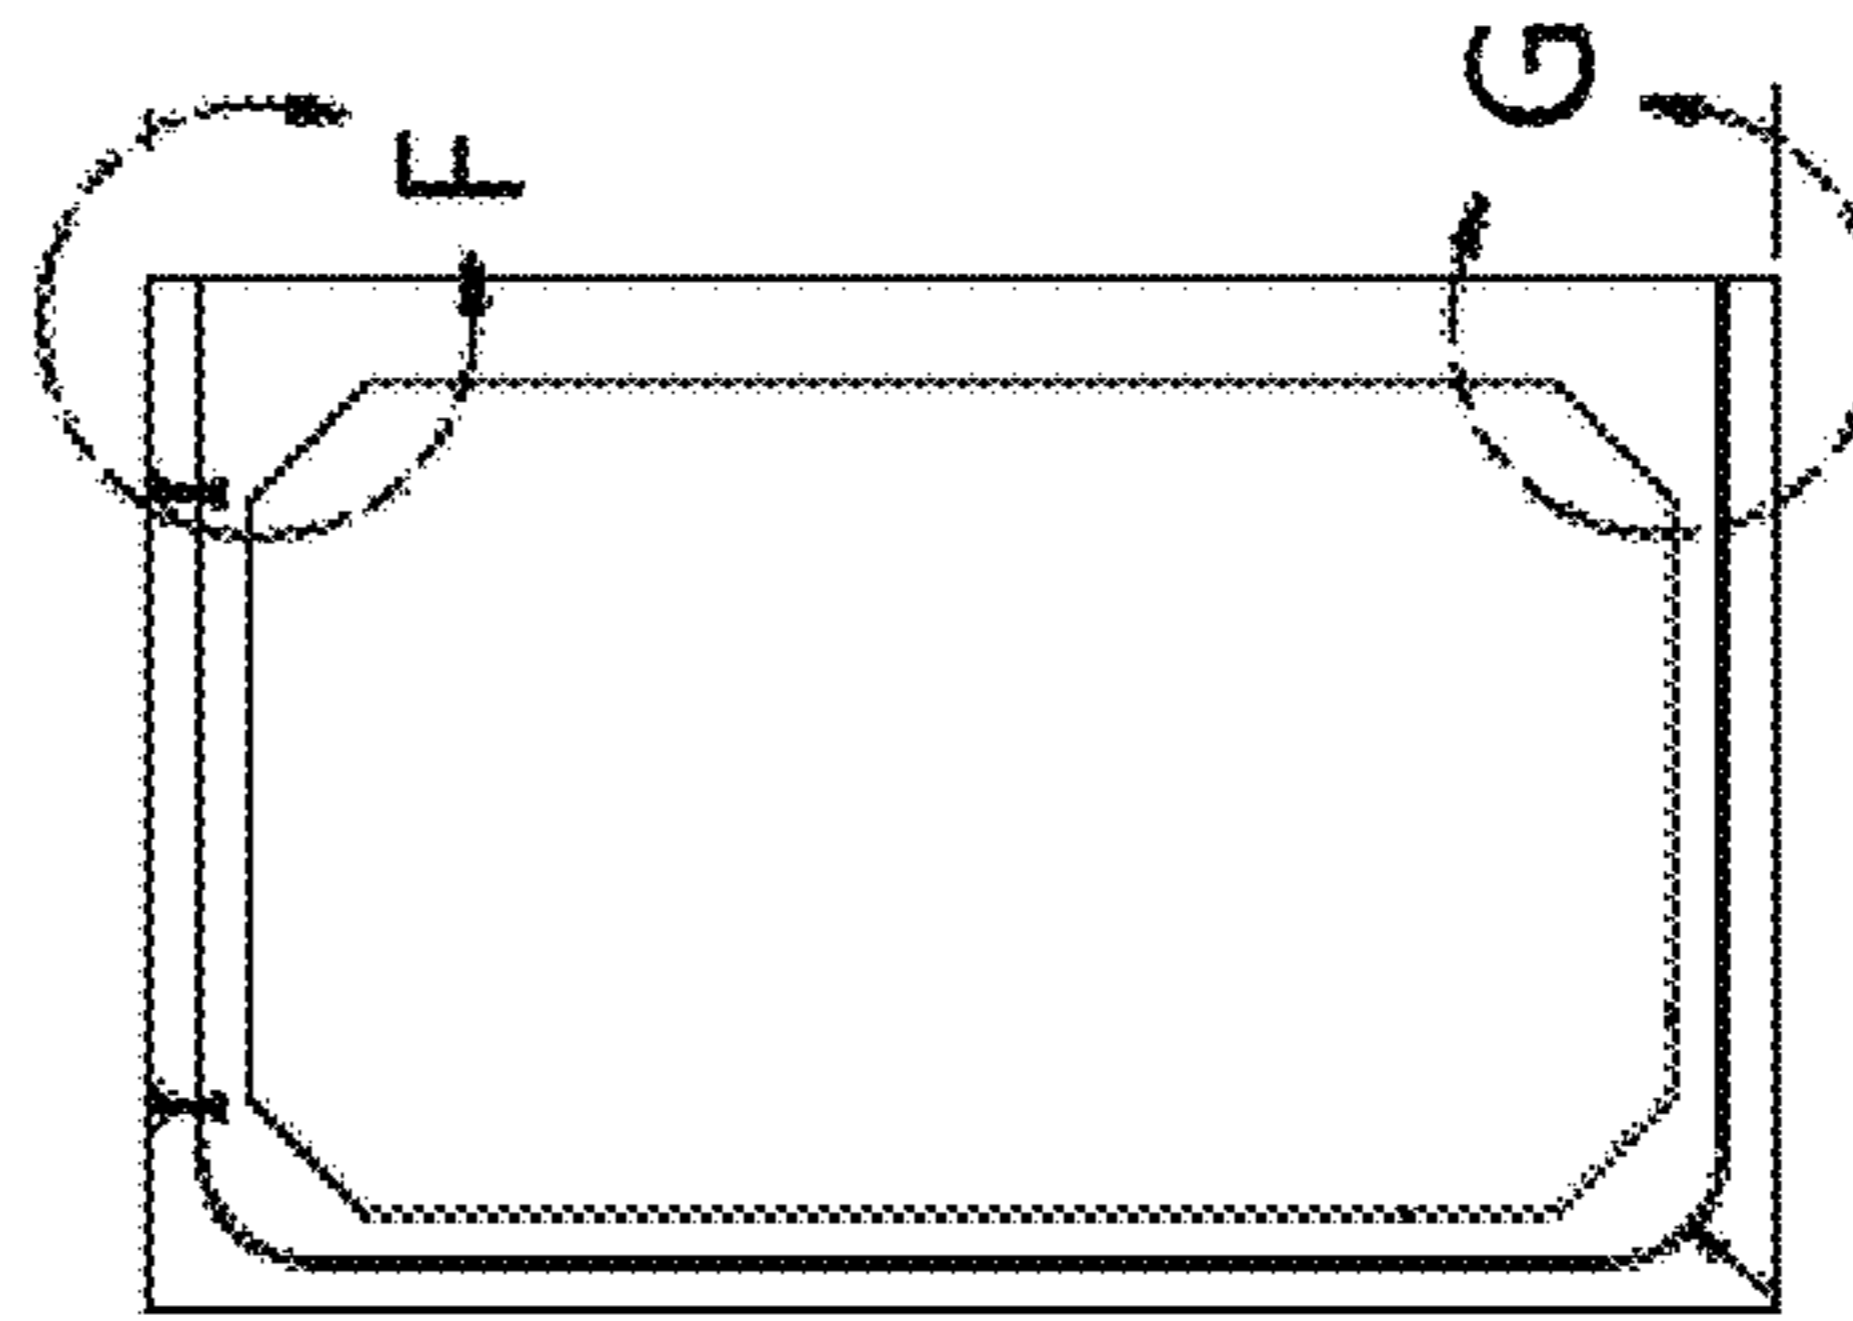


FIG. 18C



FIG. 18D

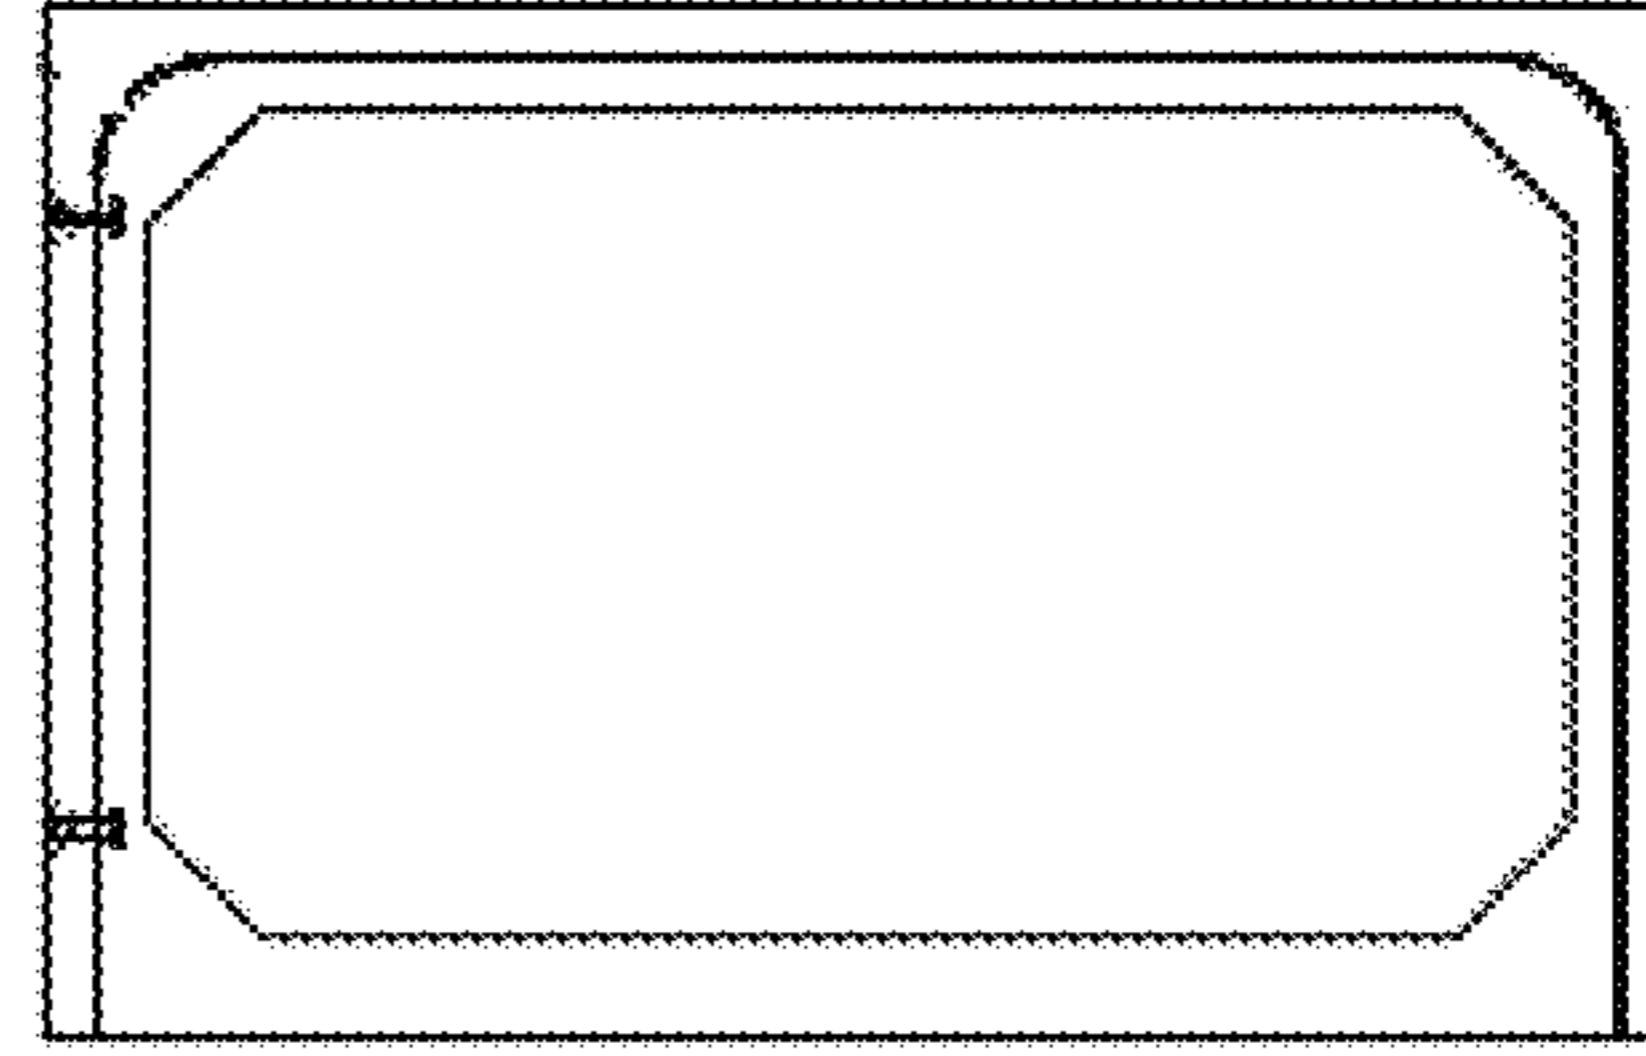


FIG. 18E

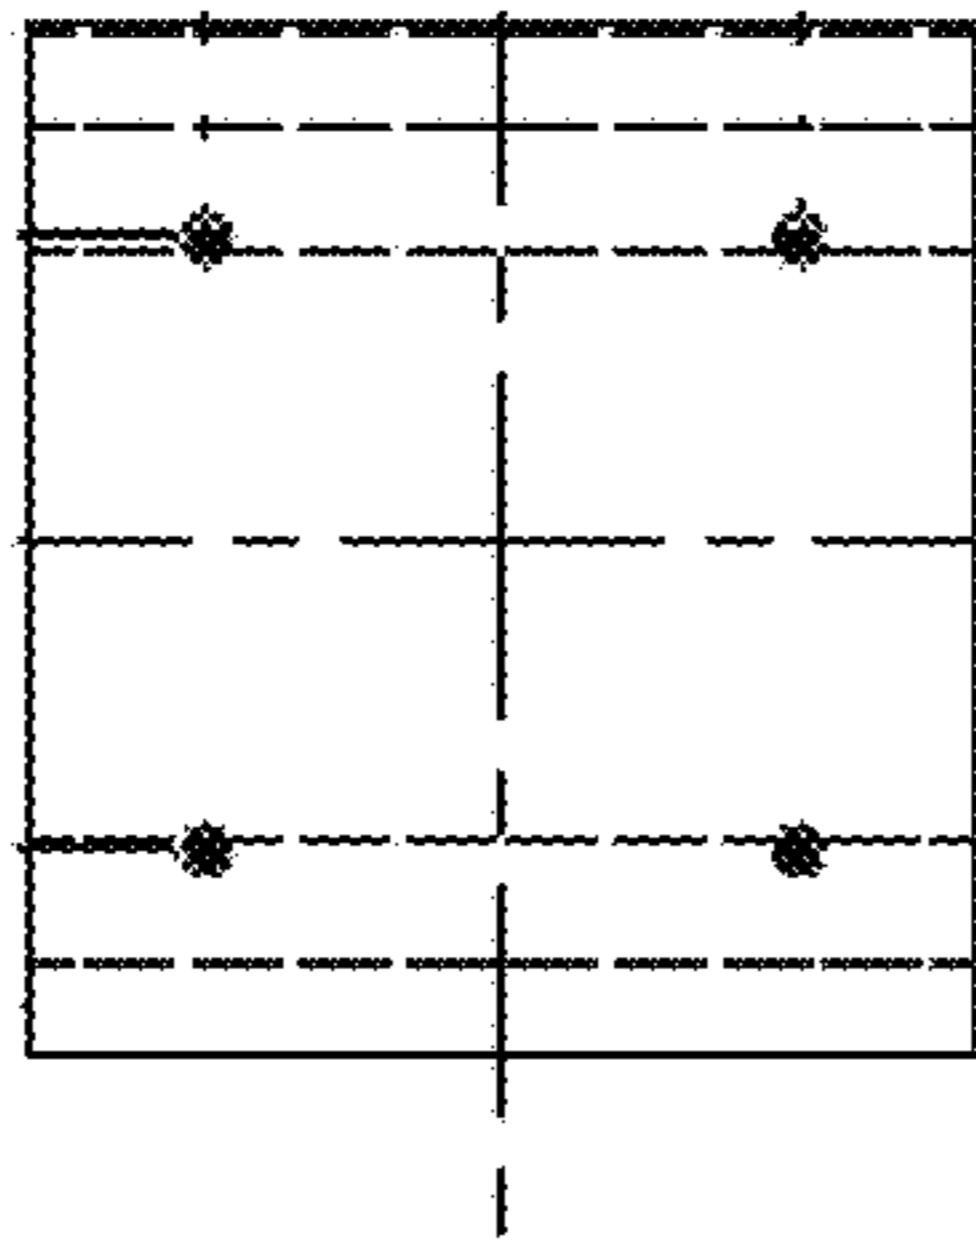


FIG. 18B

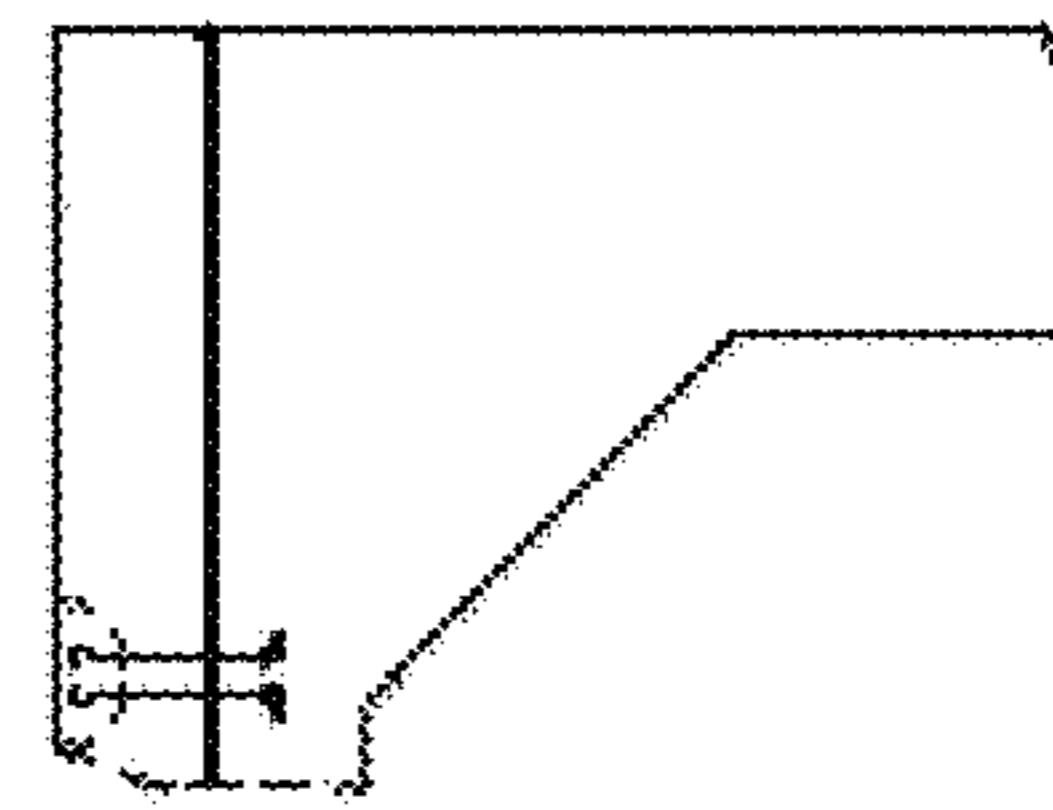


FIG. 18F

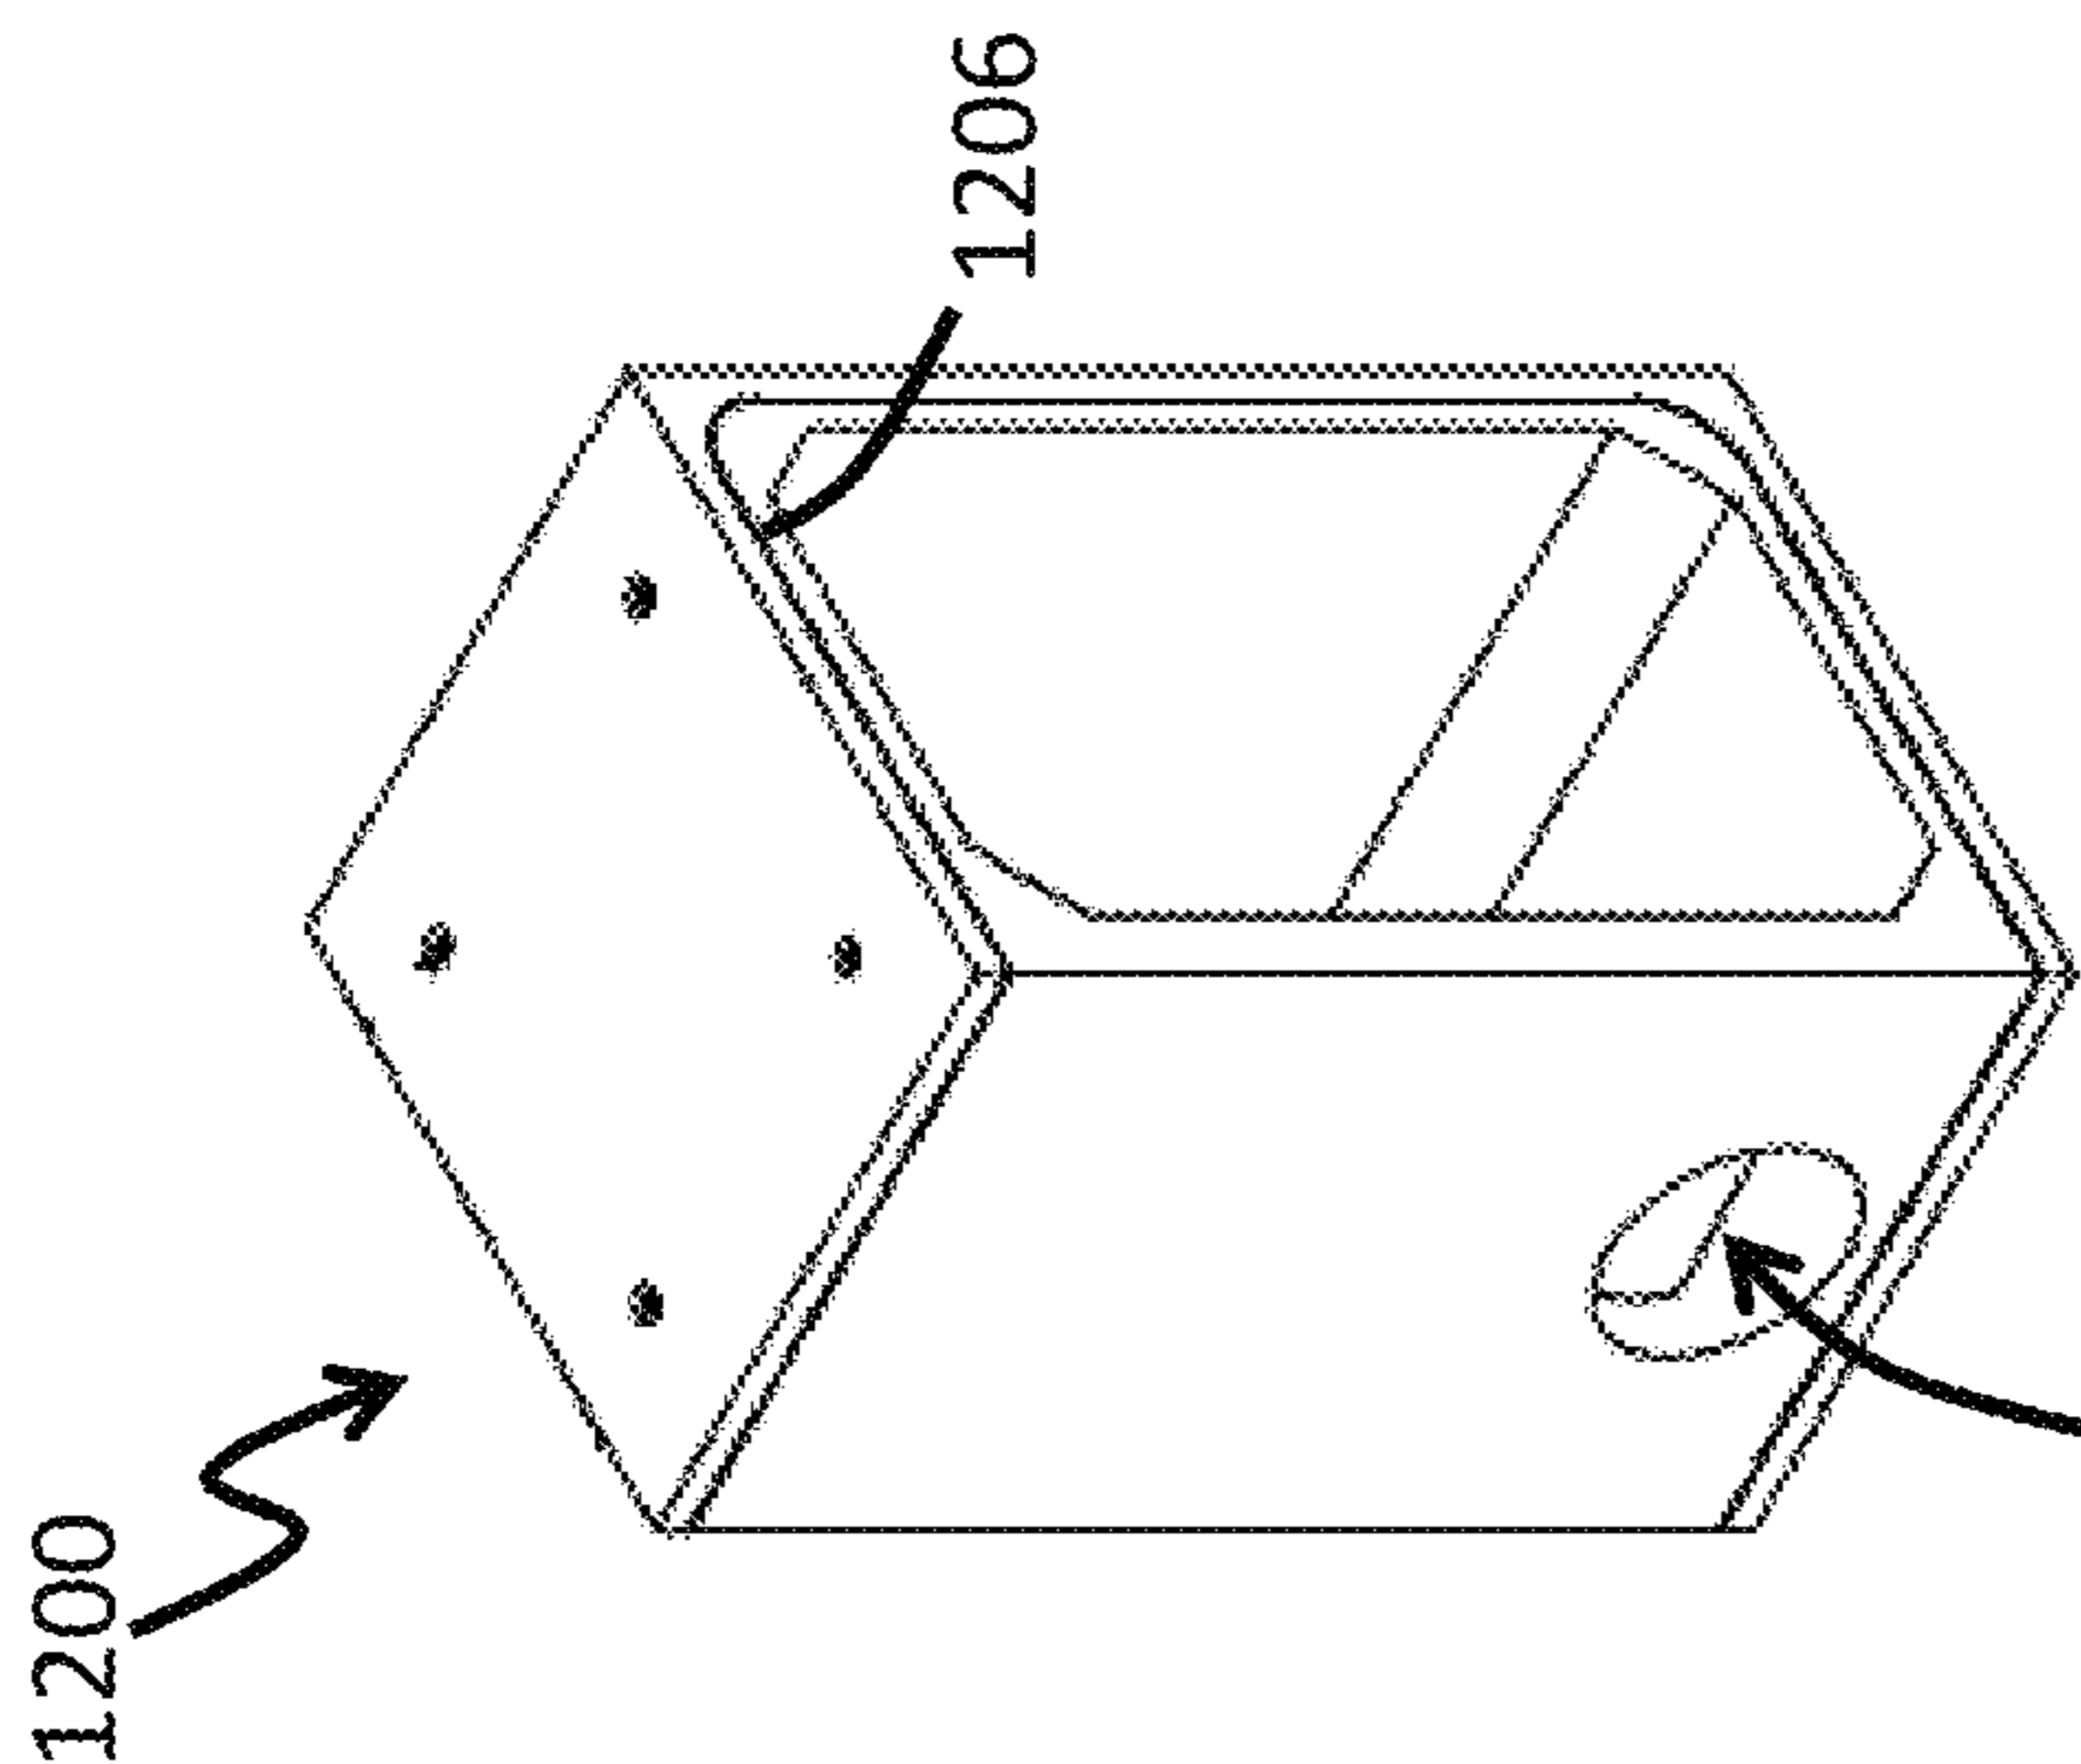


FIG. 19A

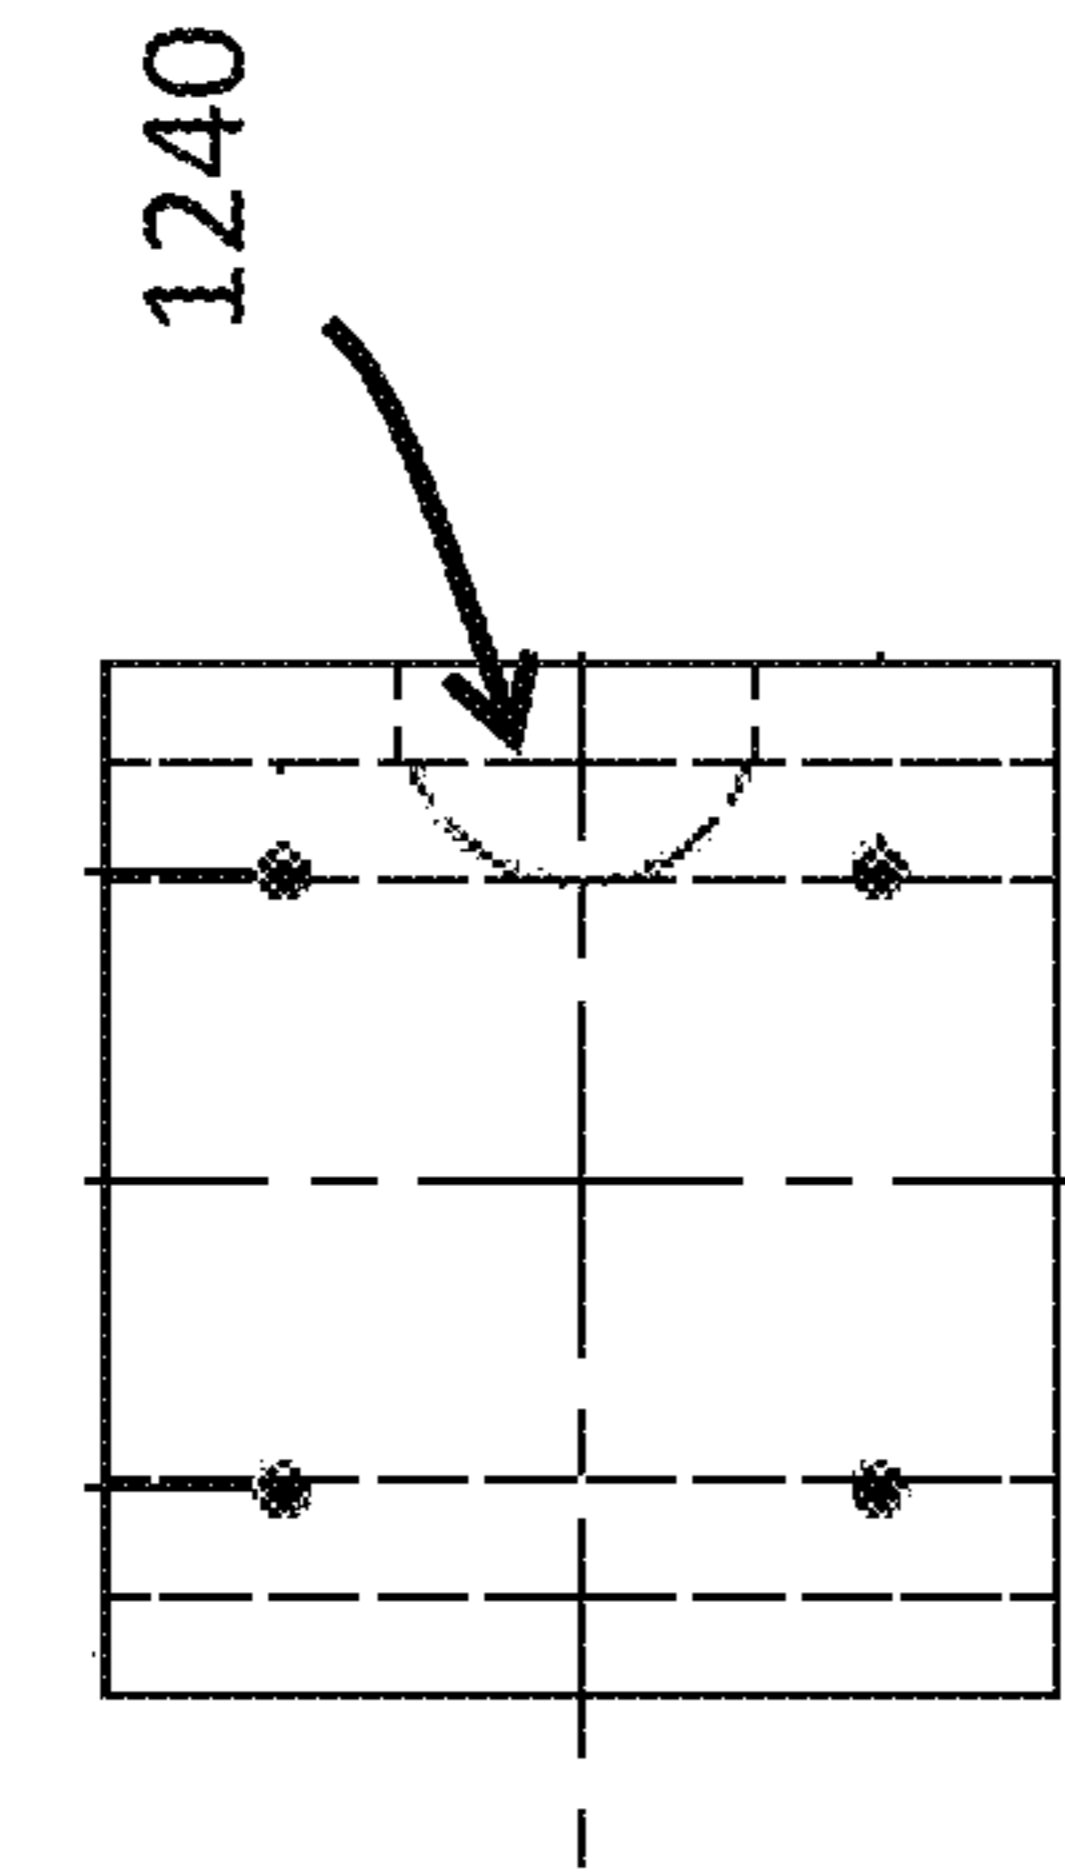


FIG. 19B

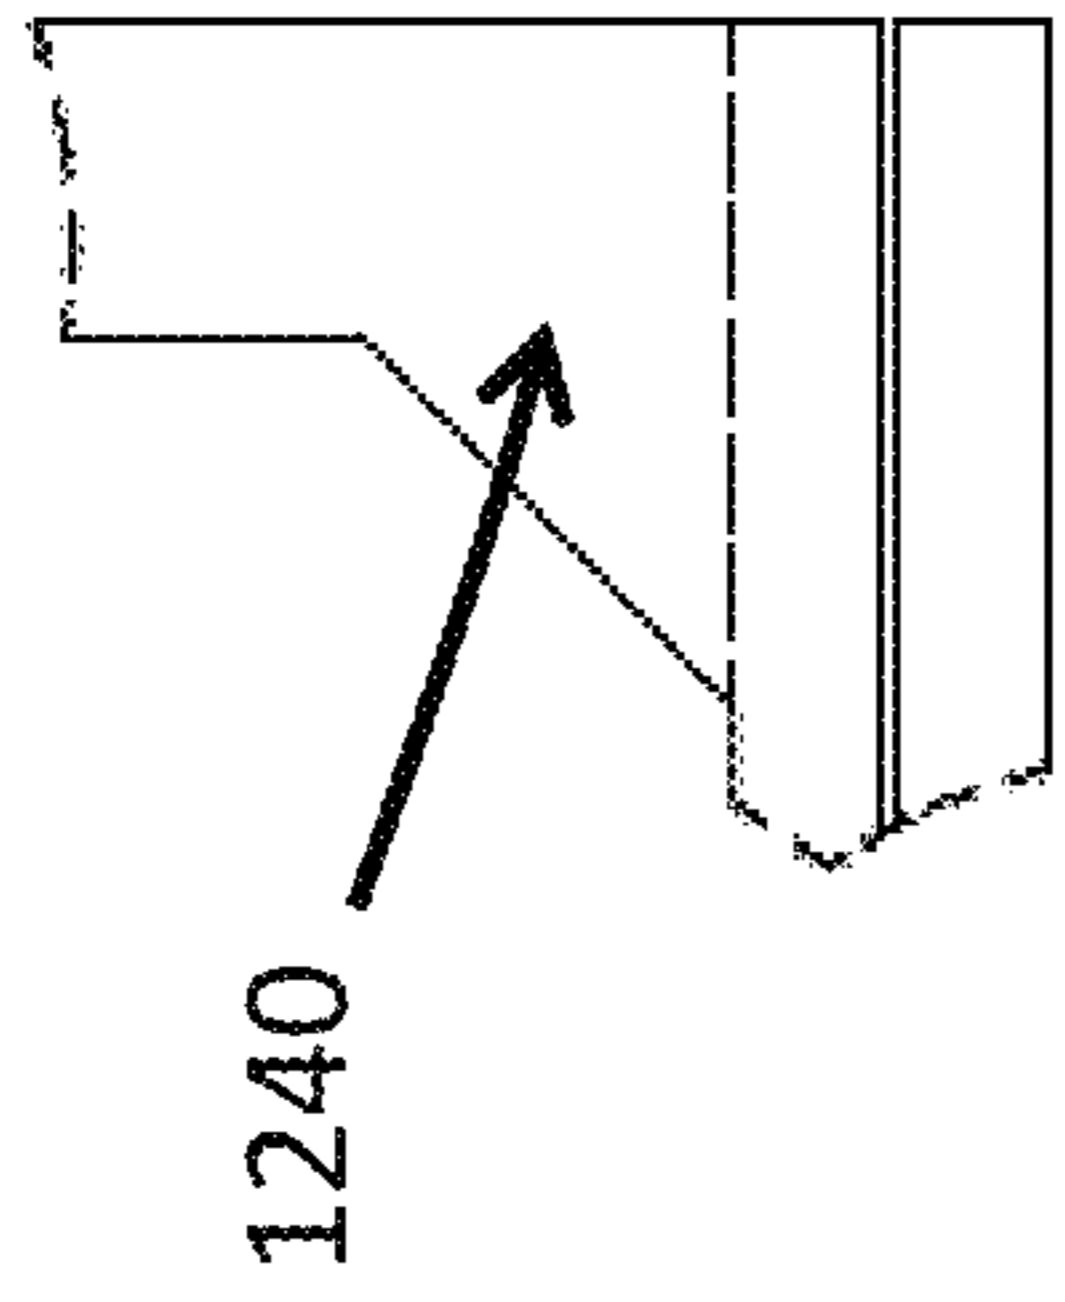


FIG. 19G

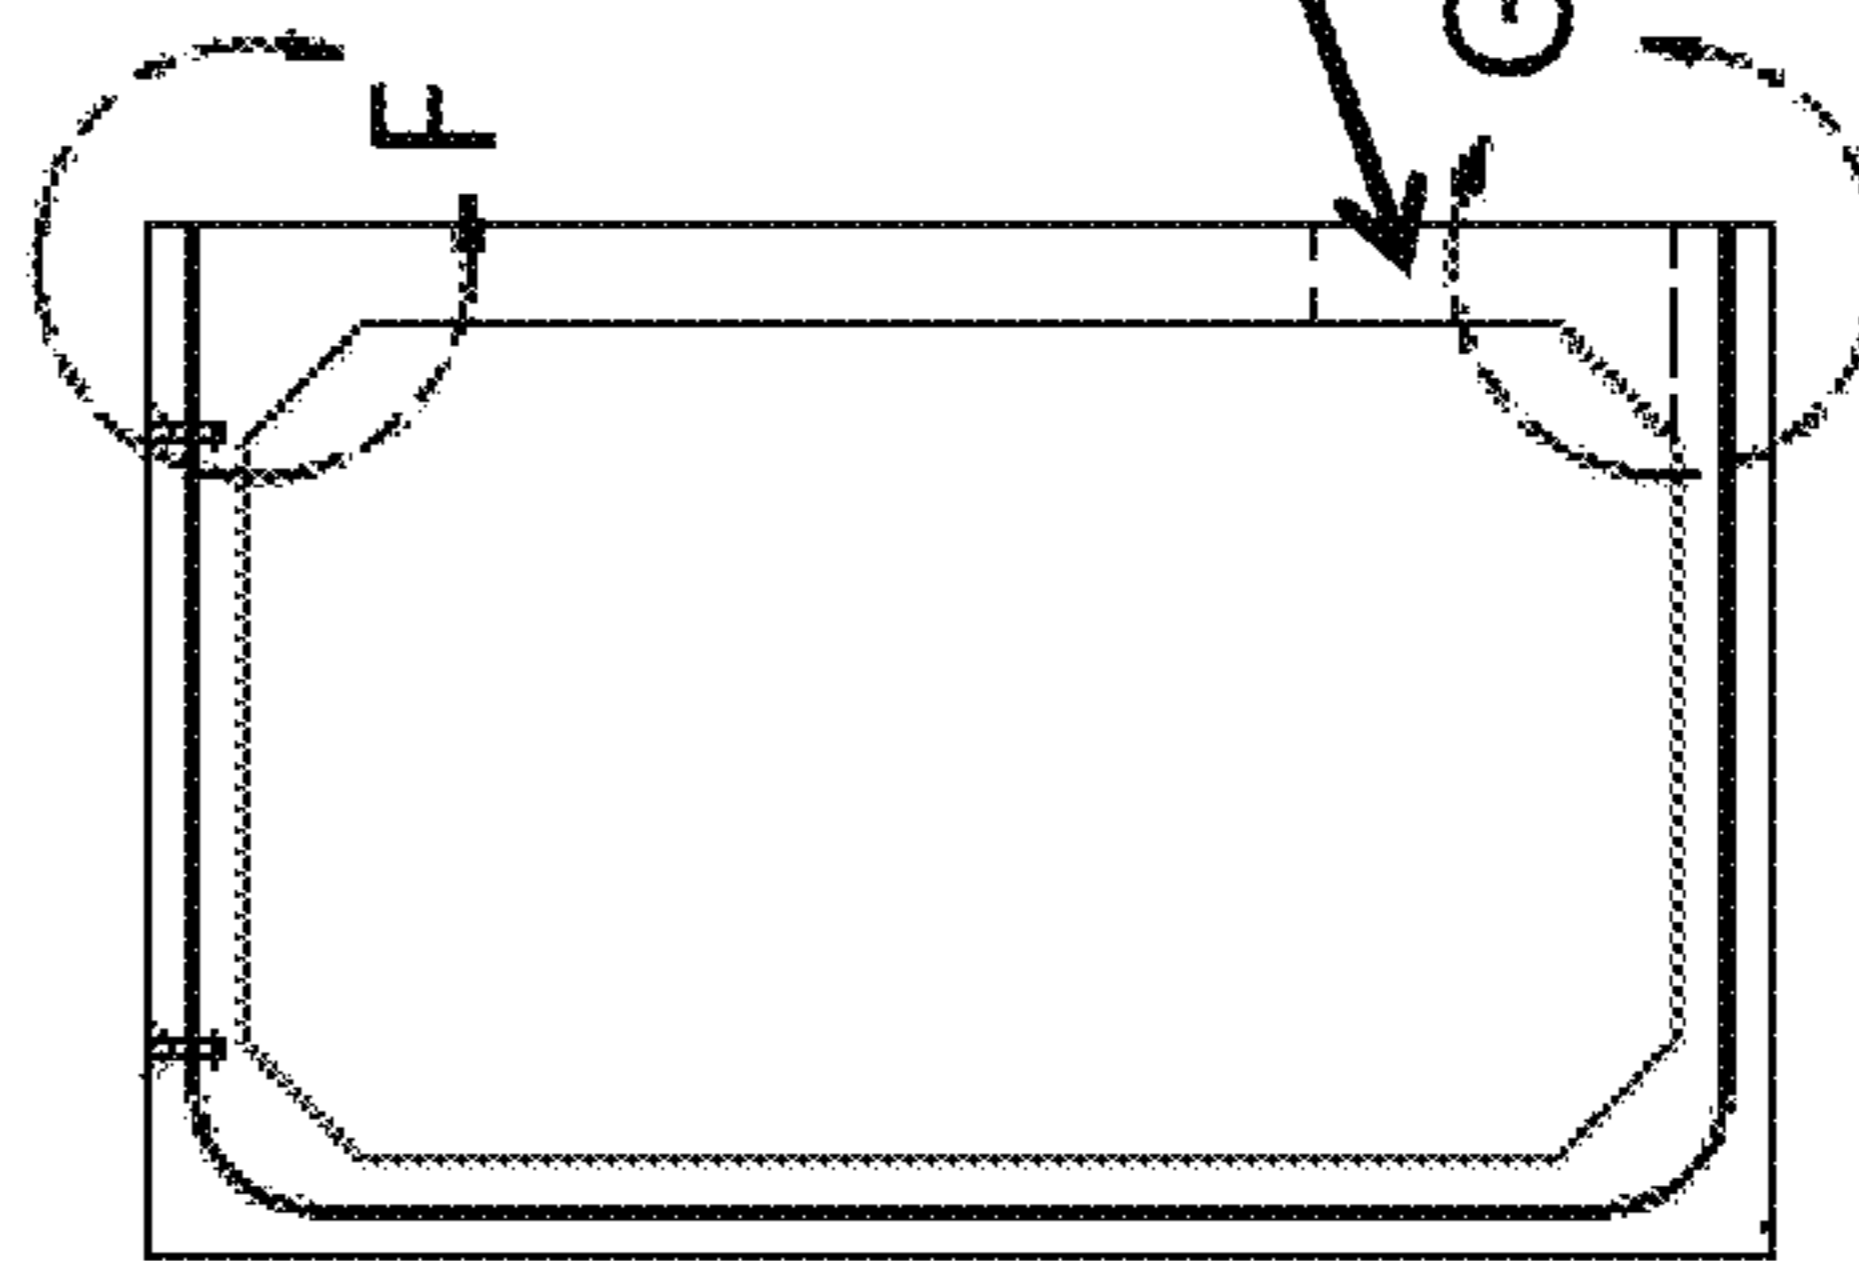


FIG. 19C

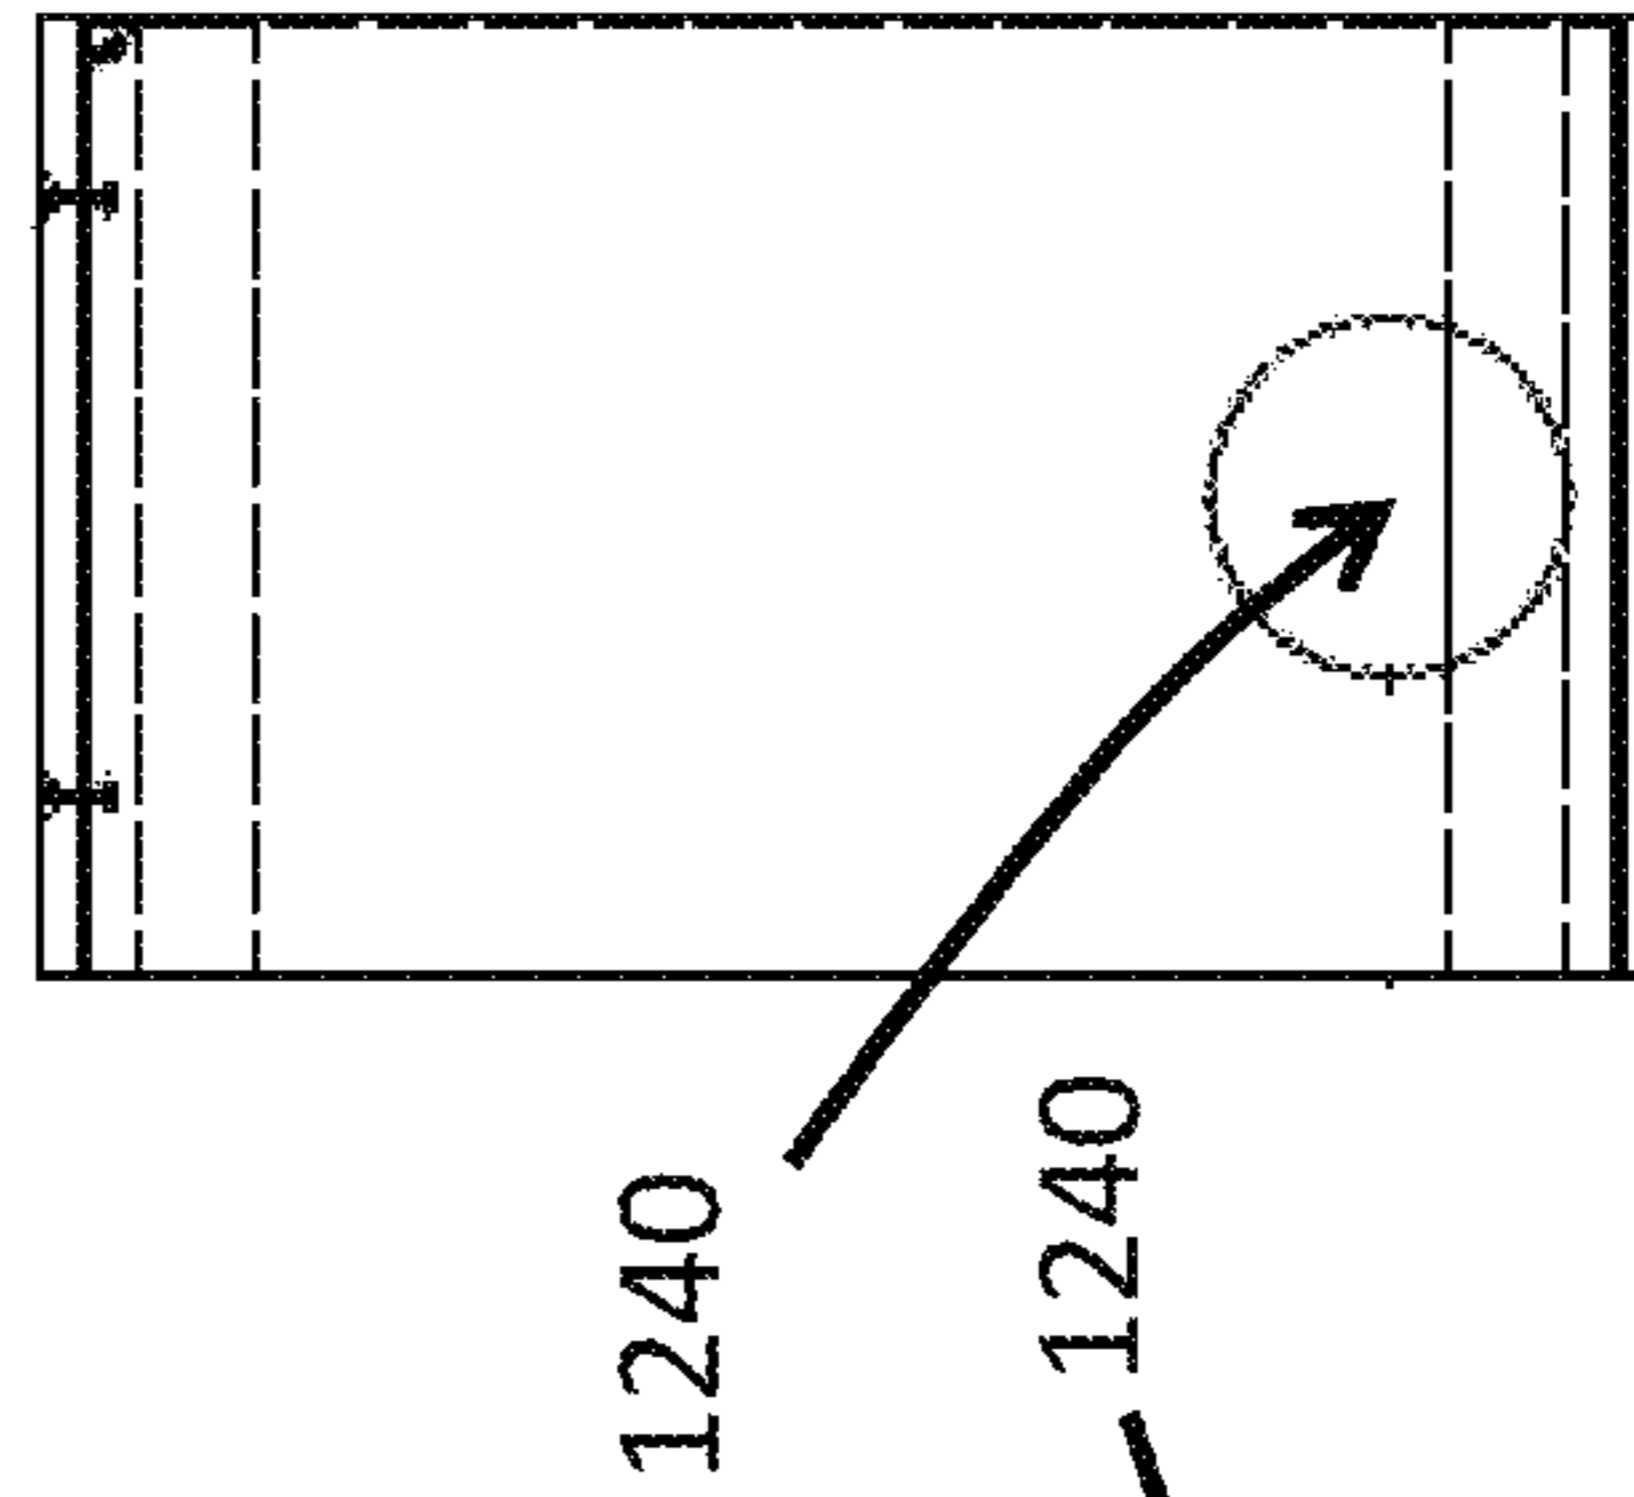


FIG. 19D

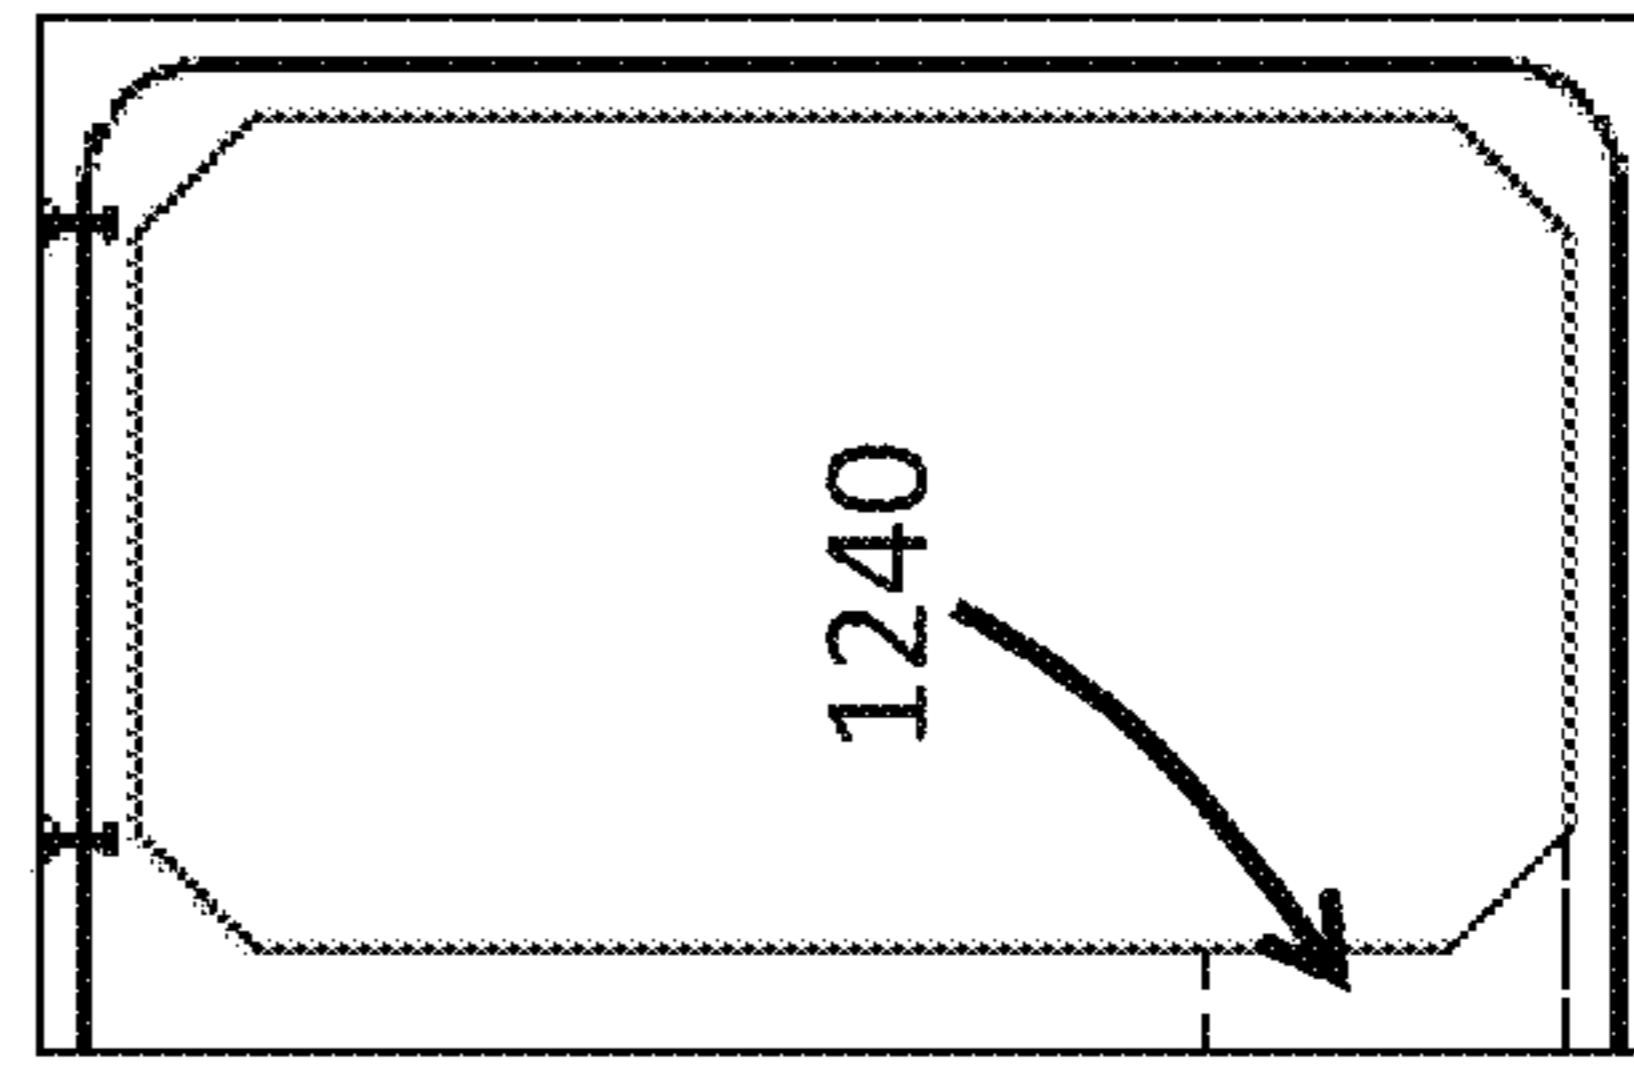


FIG. 19E

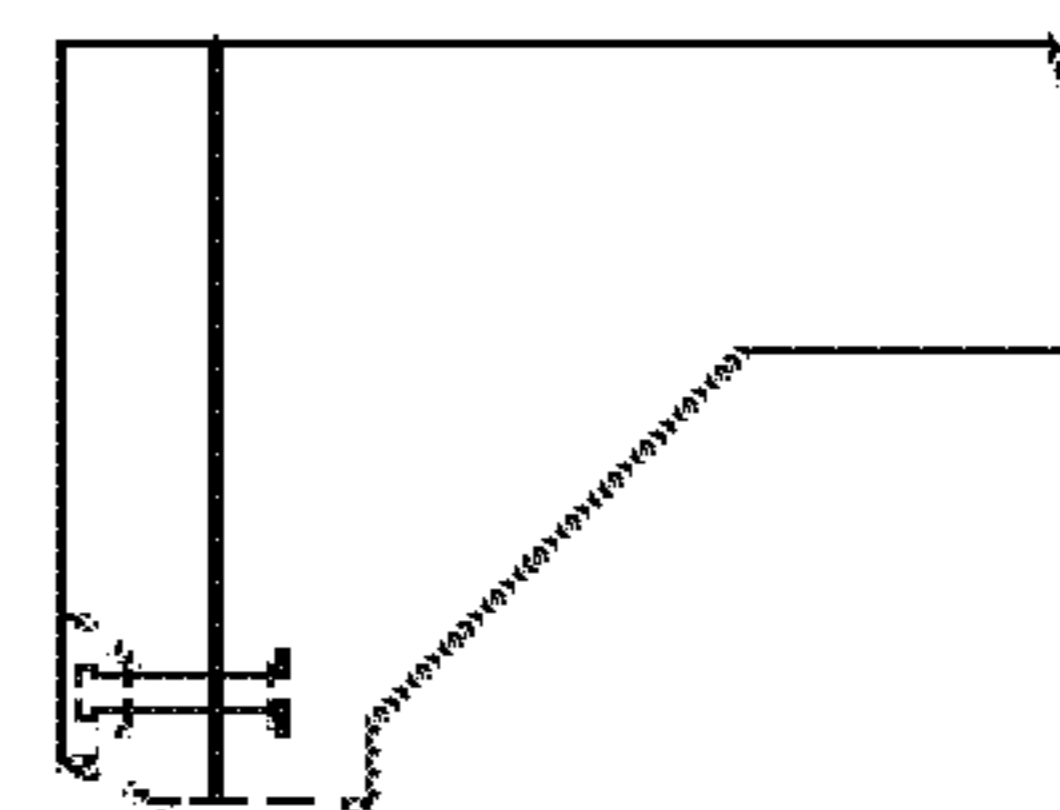


FIG. 19F

1100B

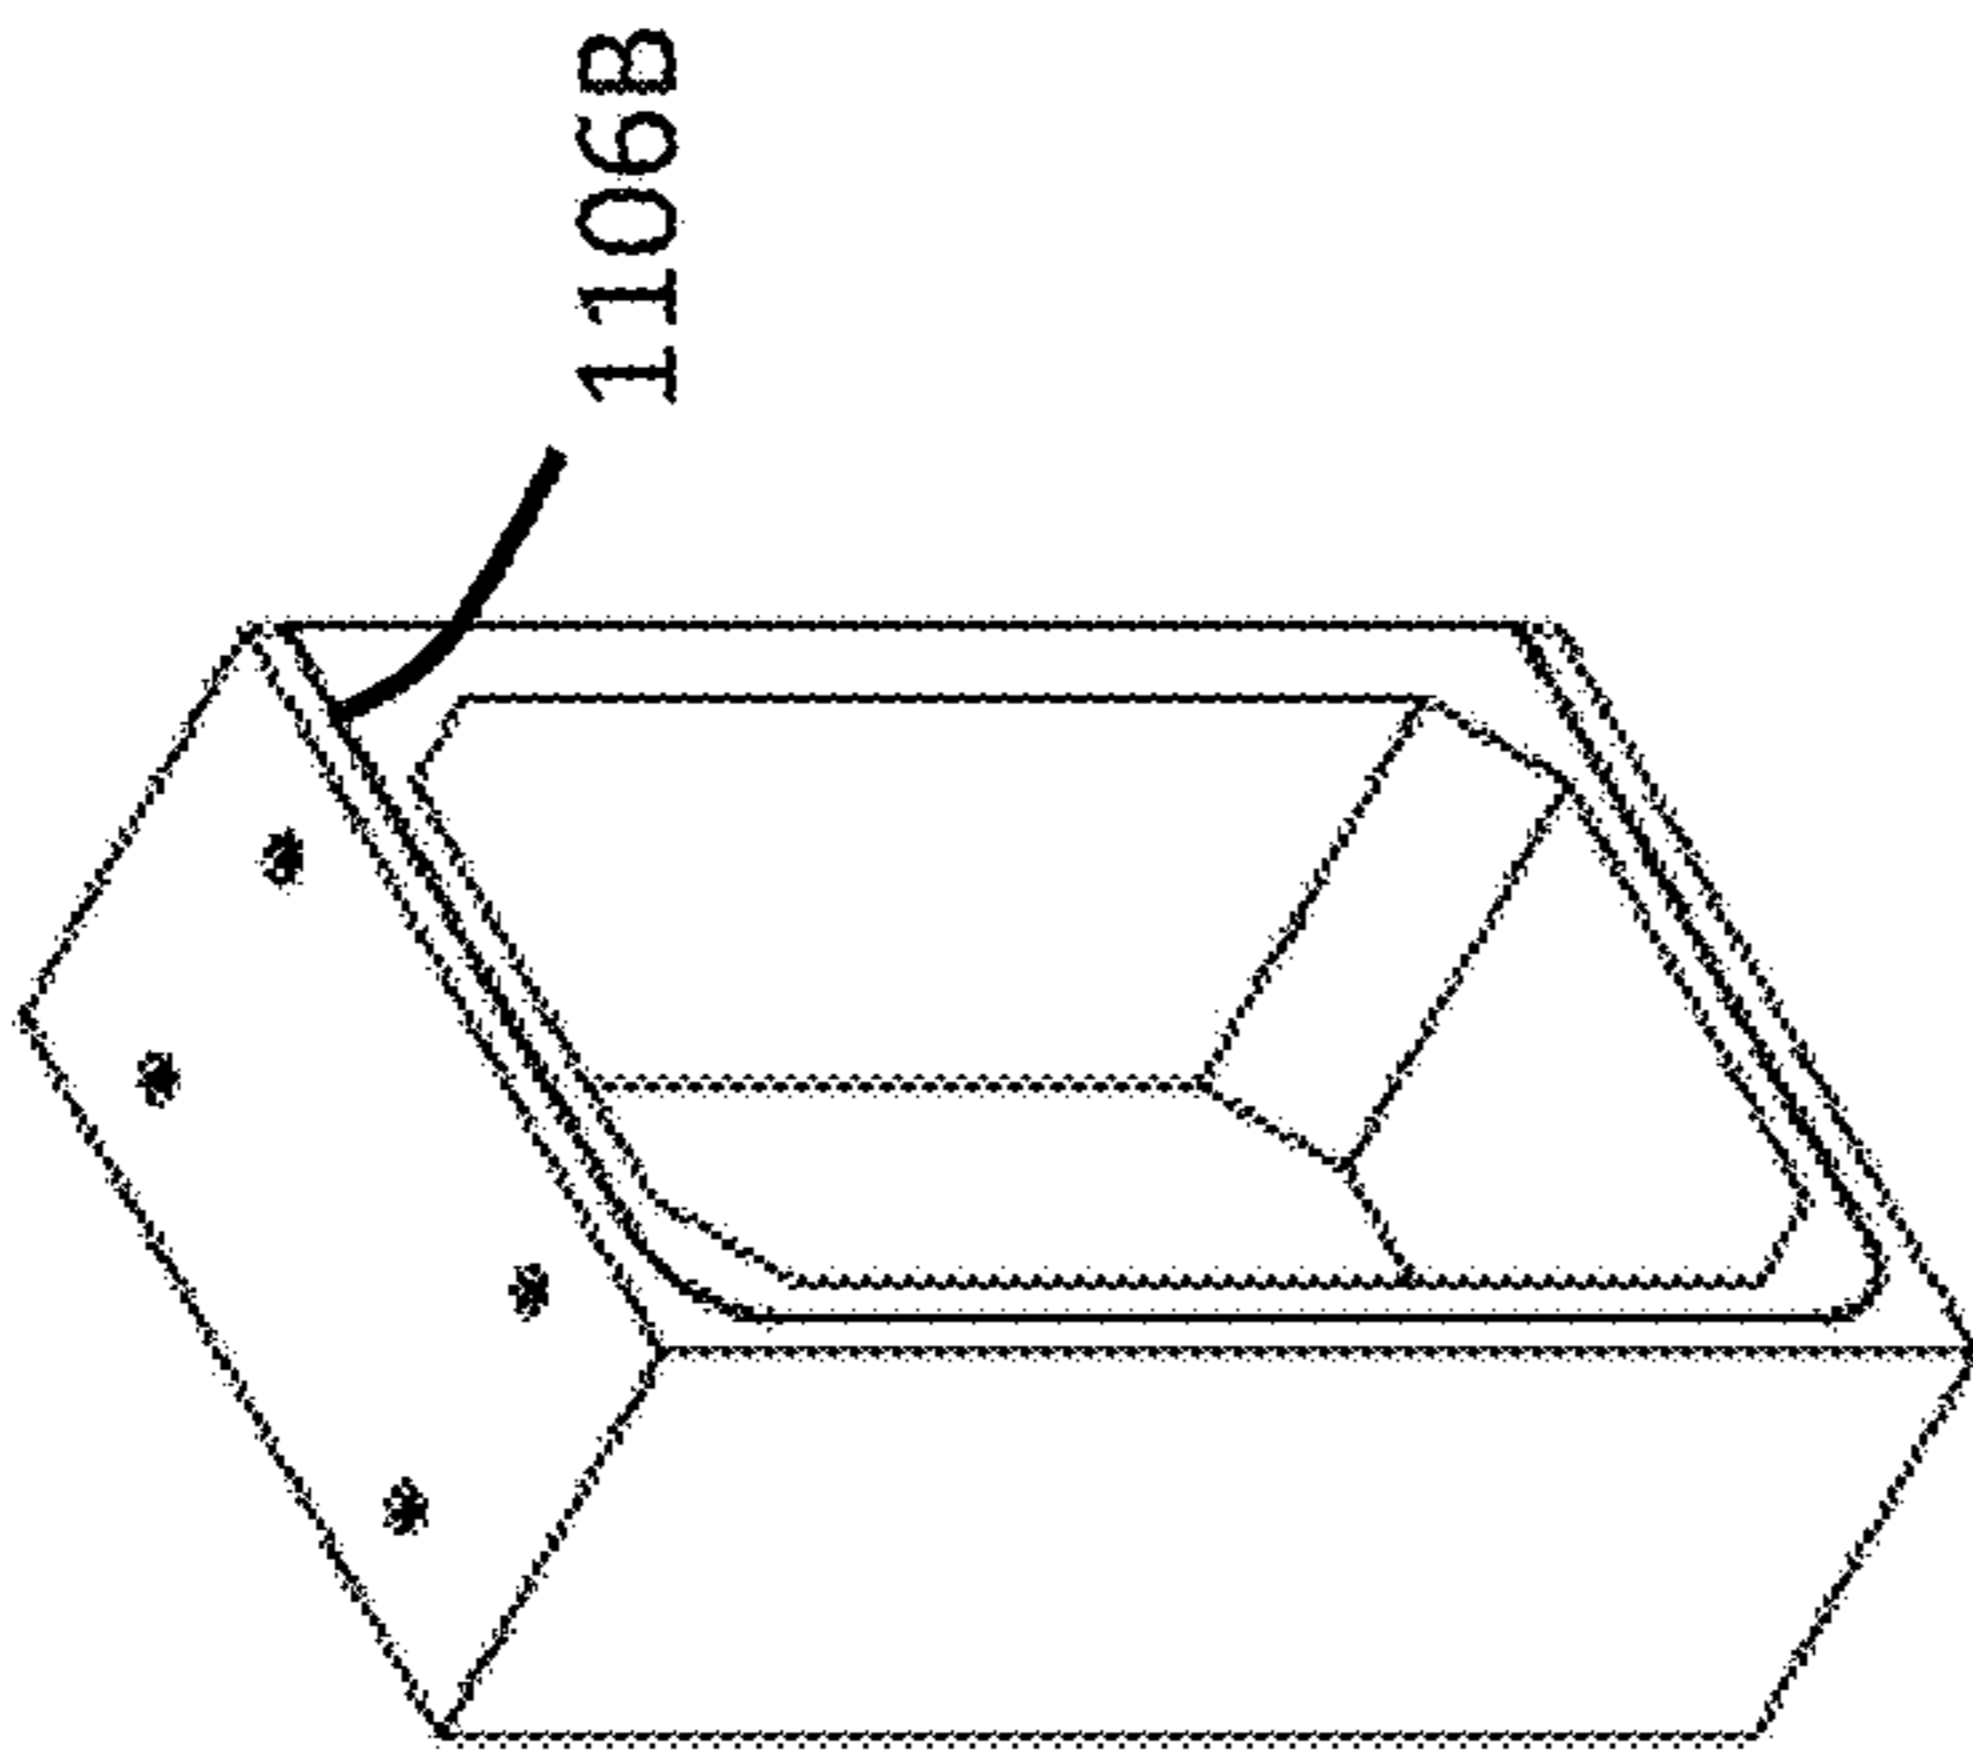


FIG. 20A

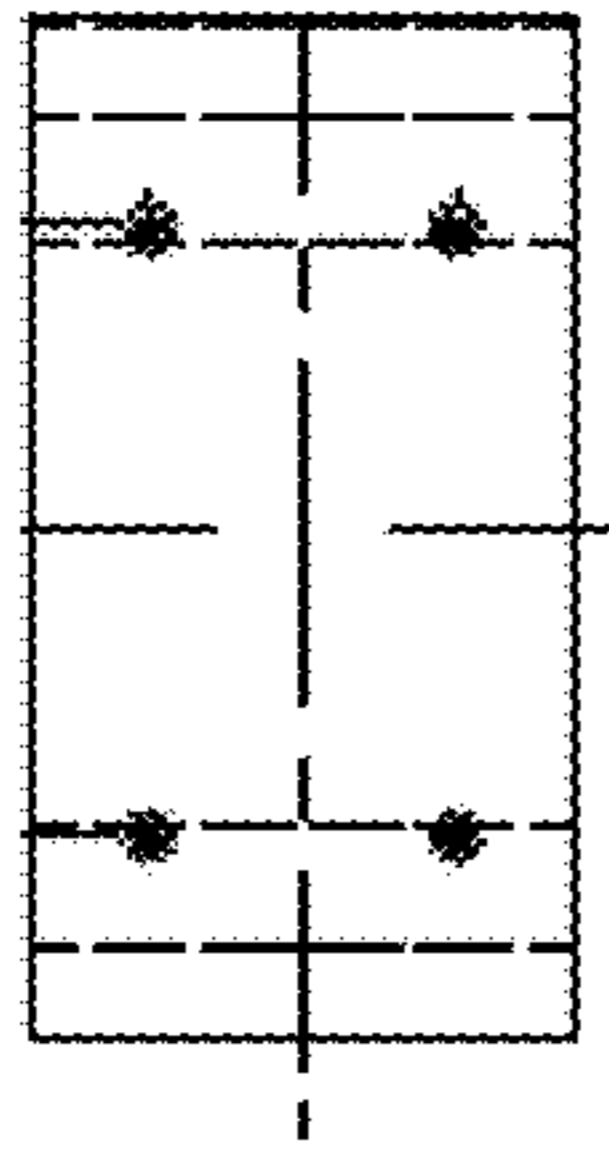


FIG. 20B

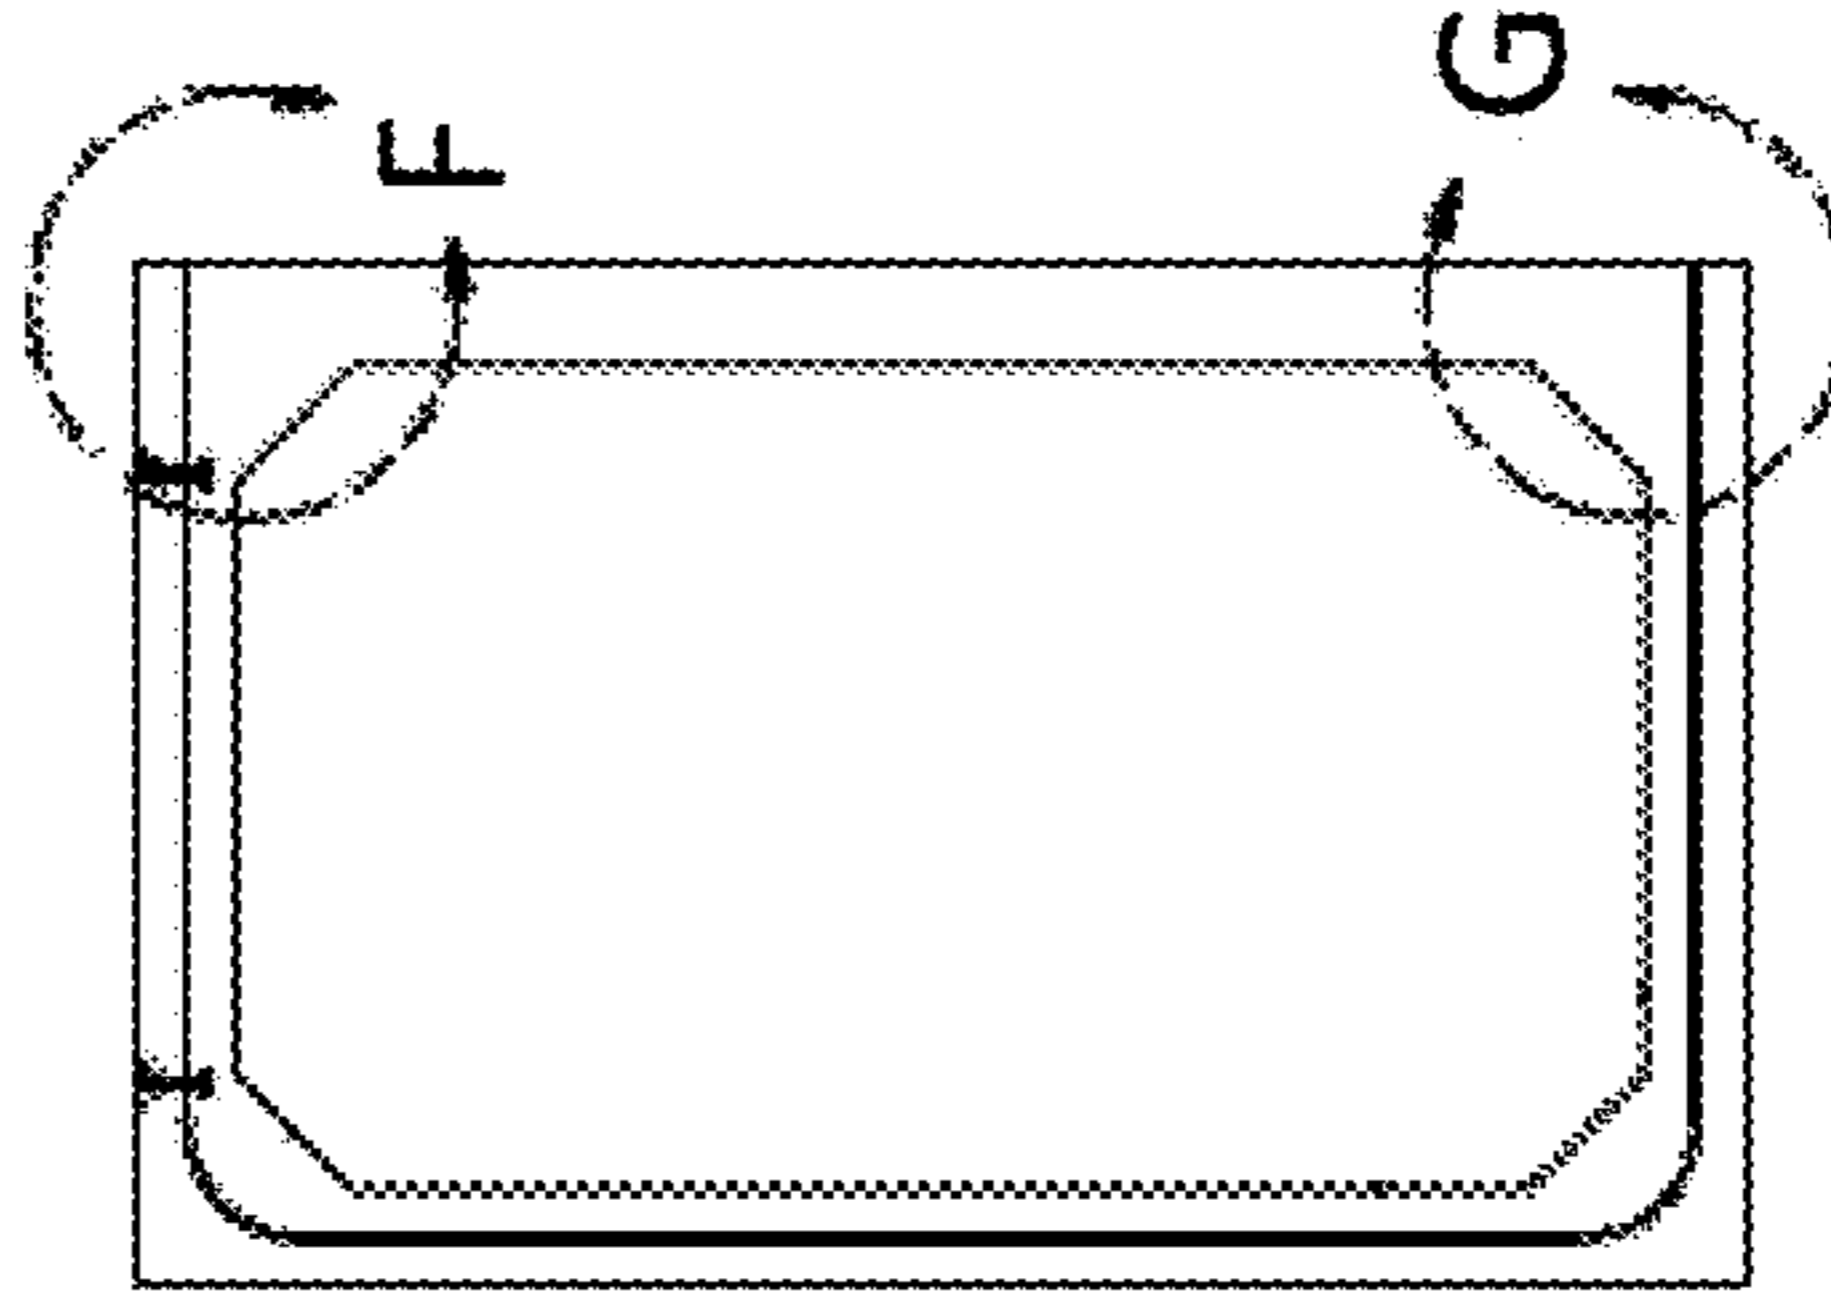


FIG. 20C

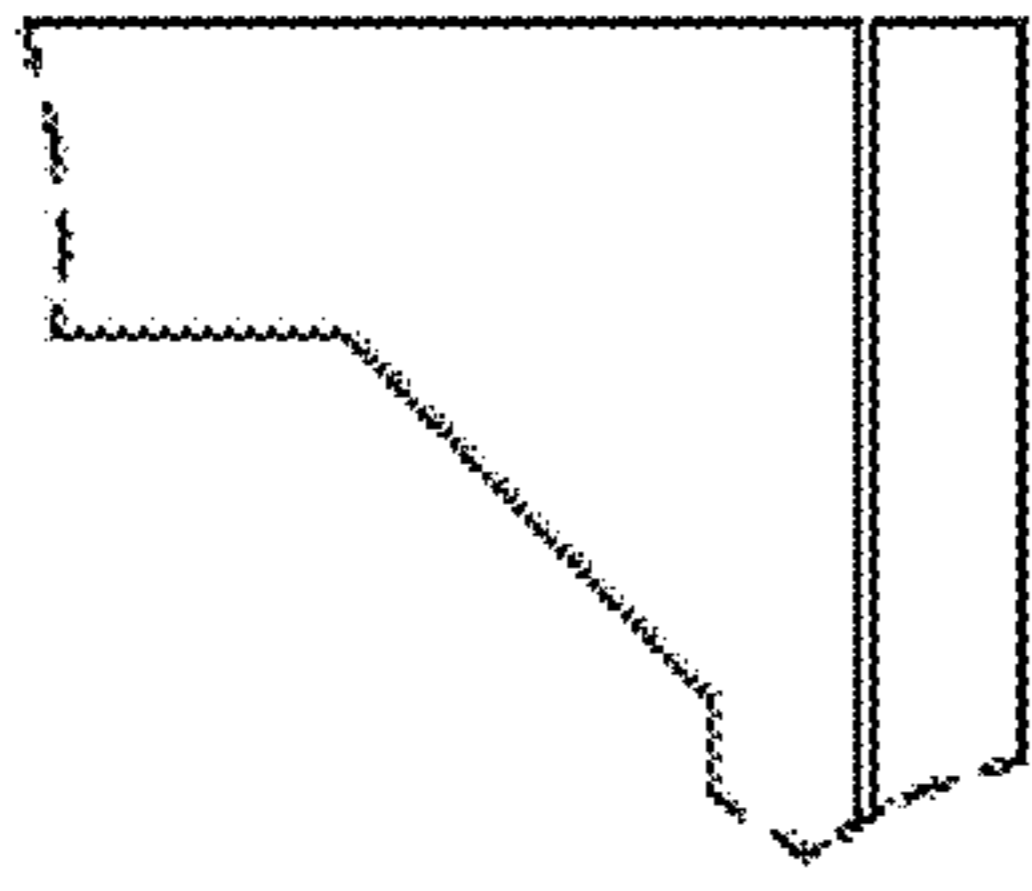


FIG. 20G

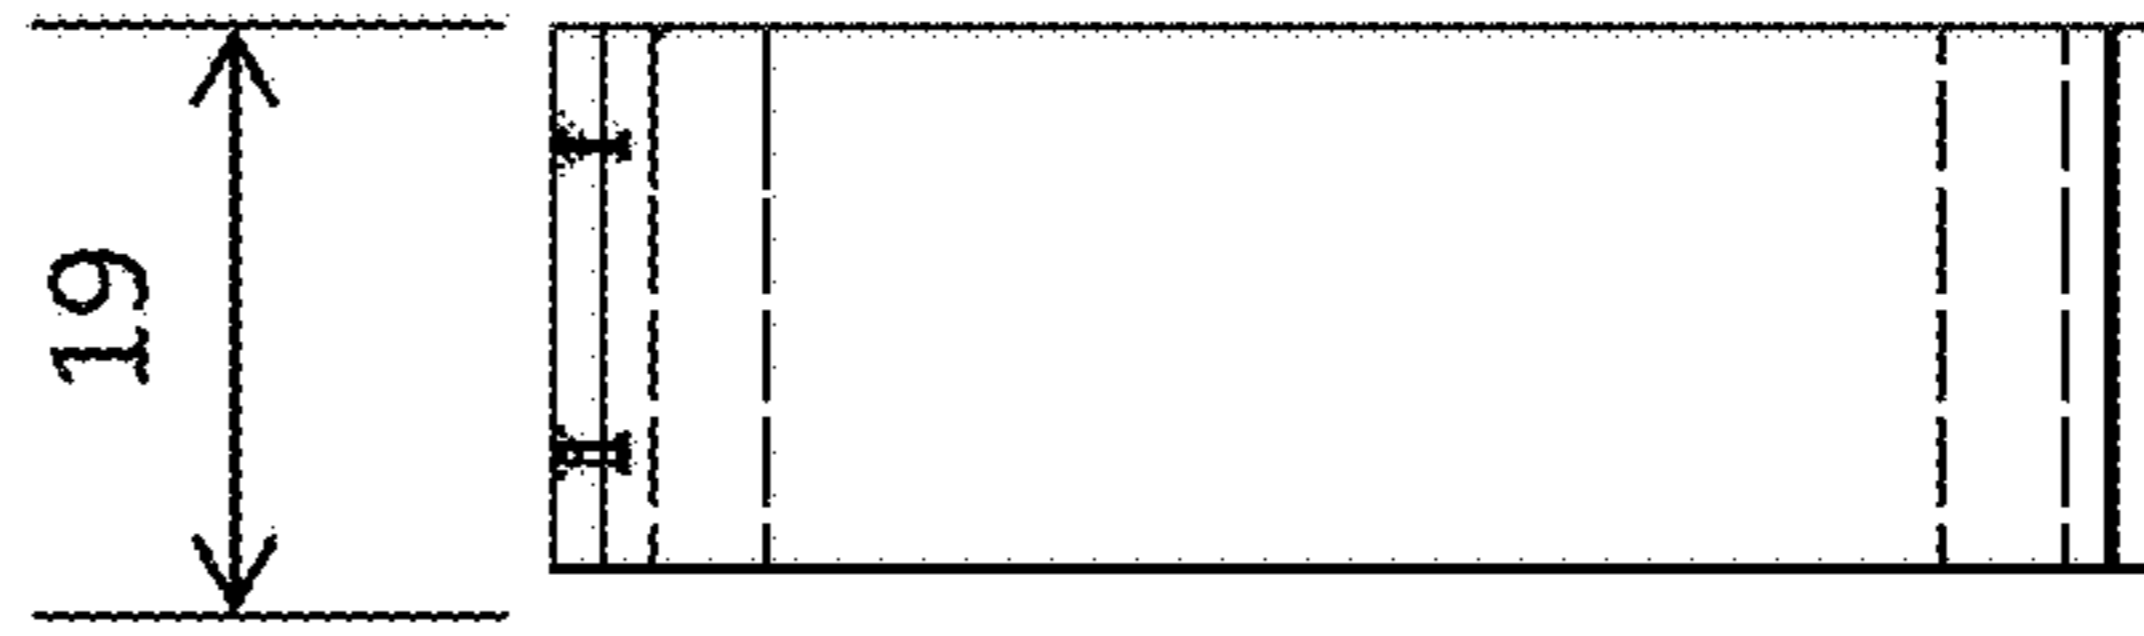


FIG. 20D

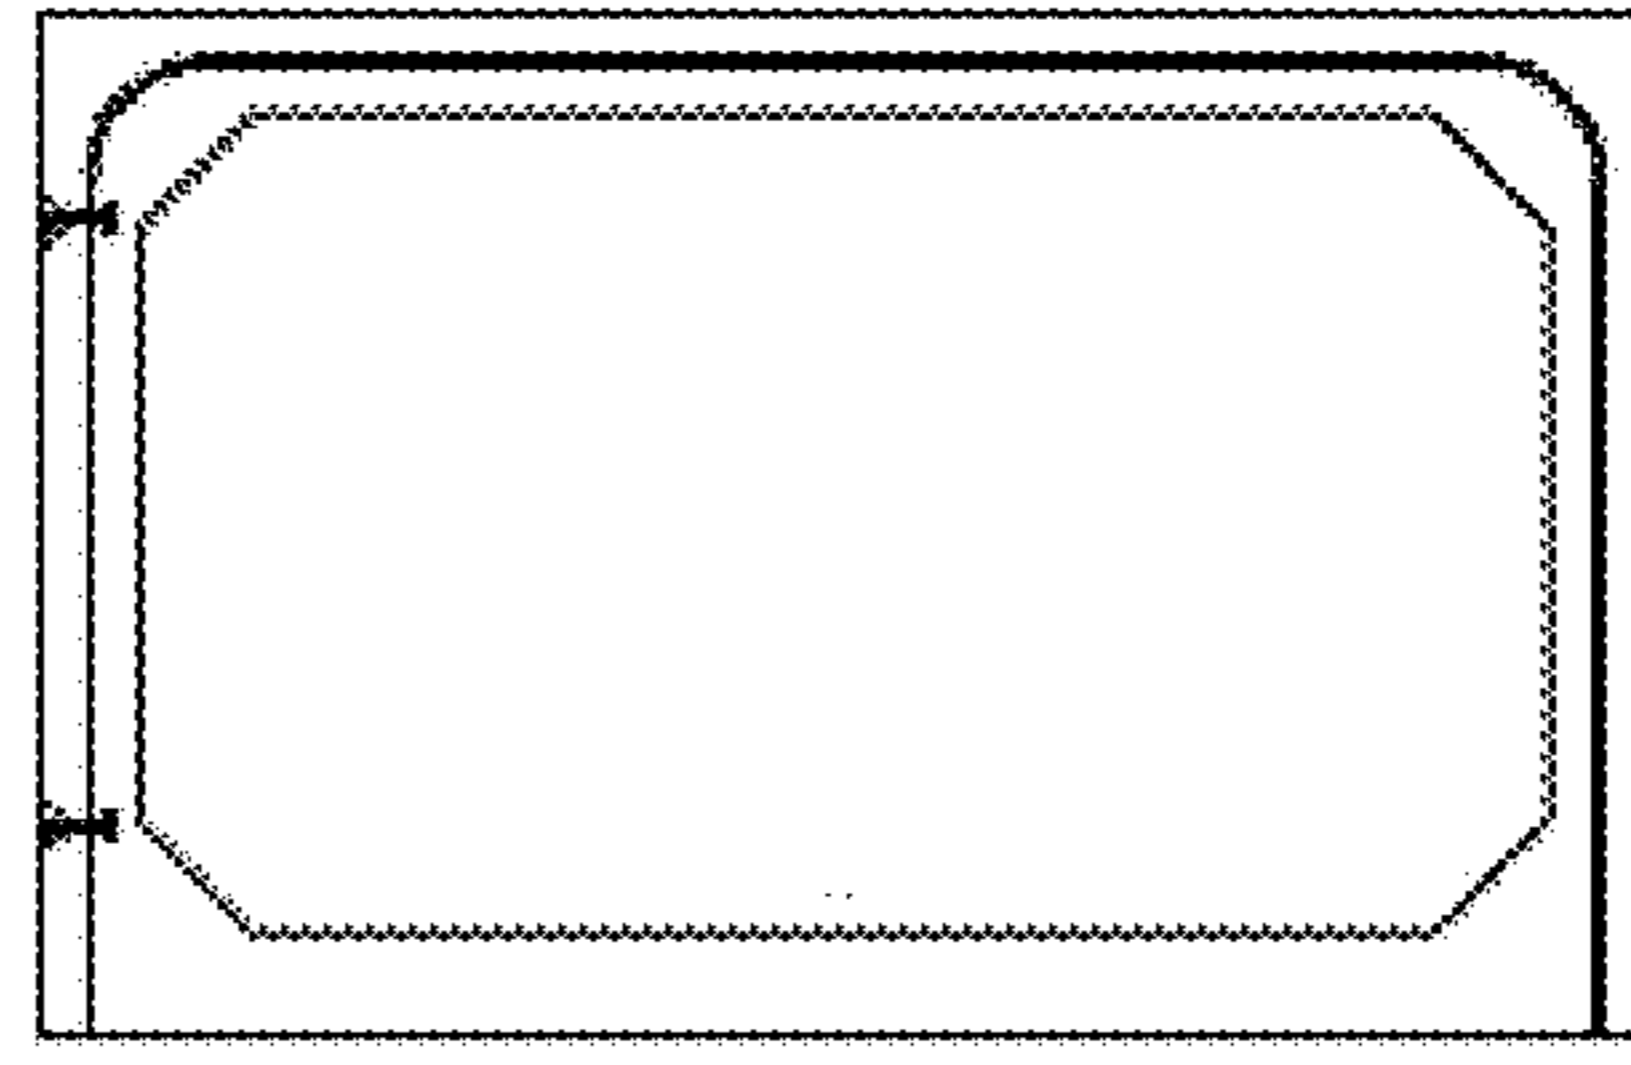


FIG. 20E

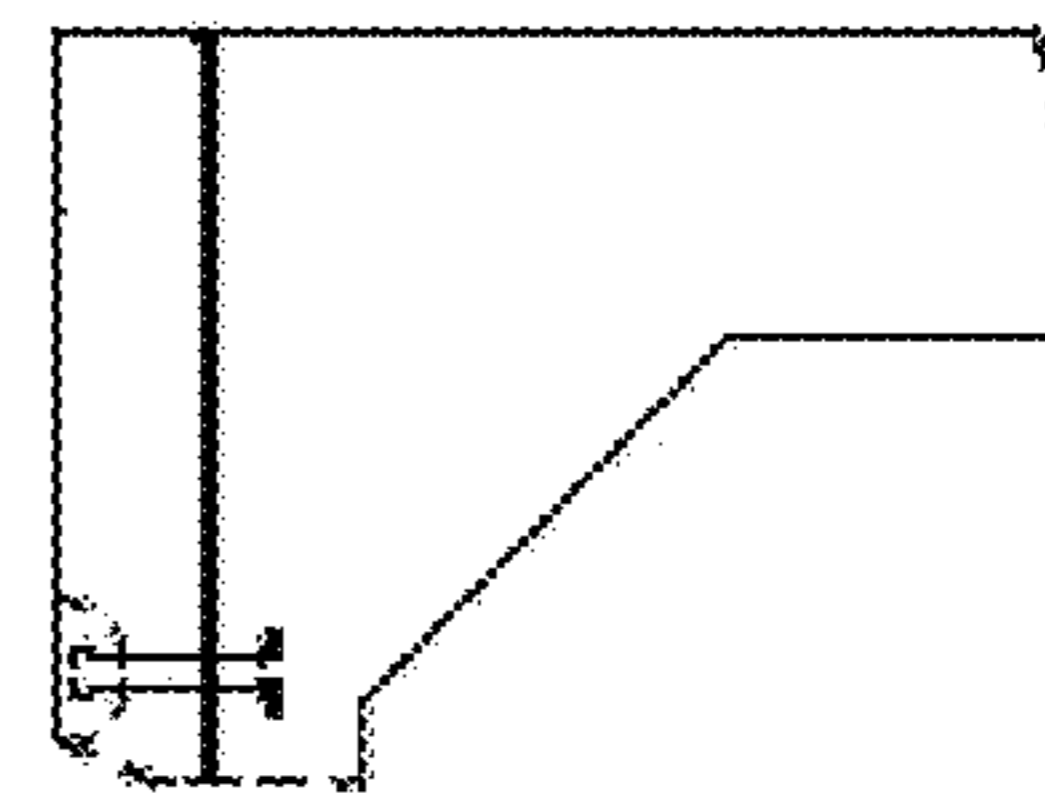


FIG. 20F

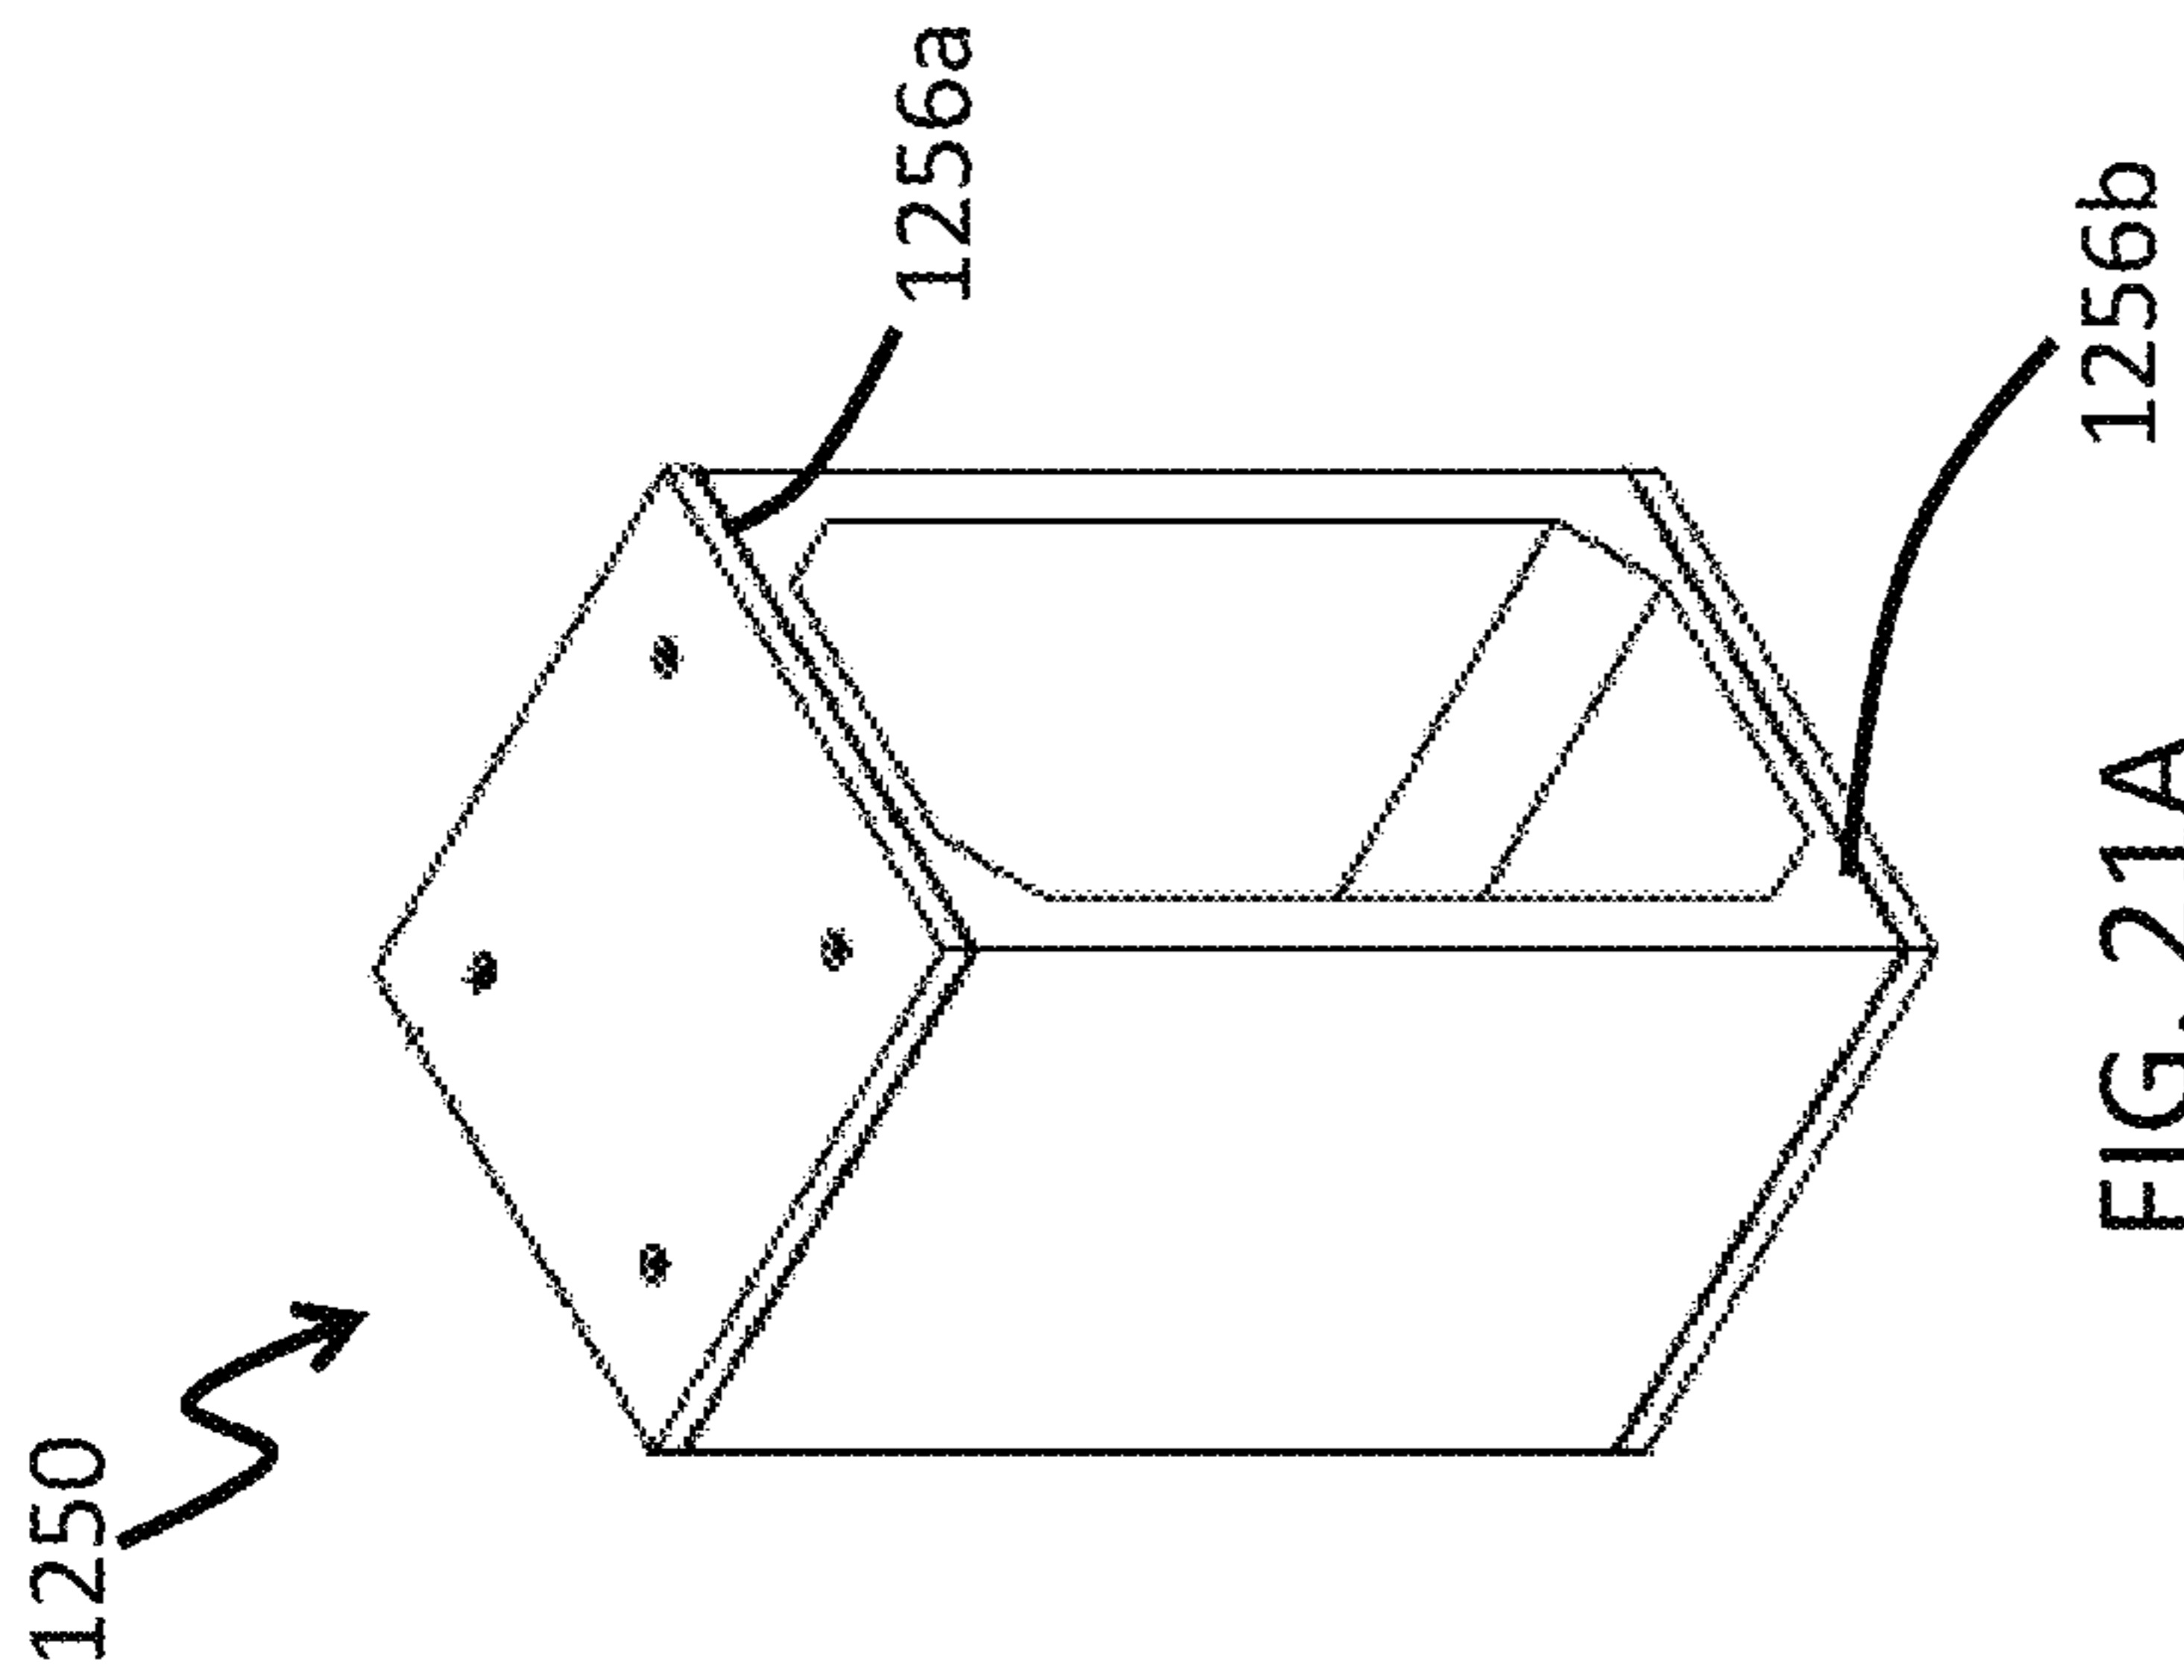


FIG. 21A

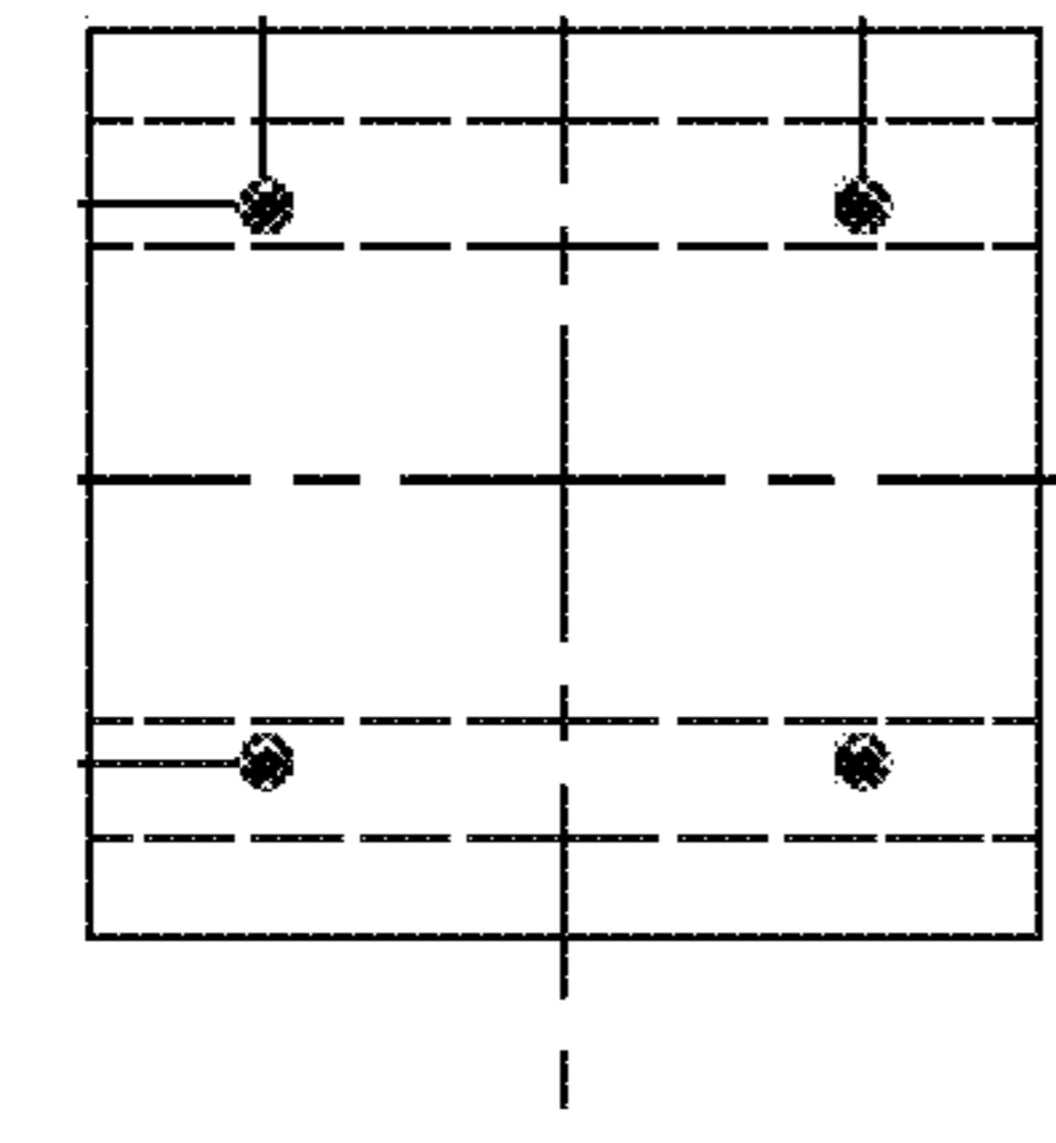


FIG. 21B

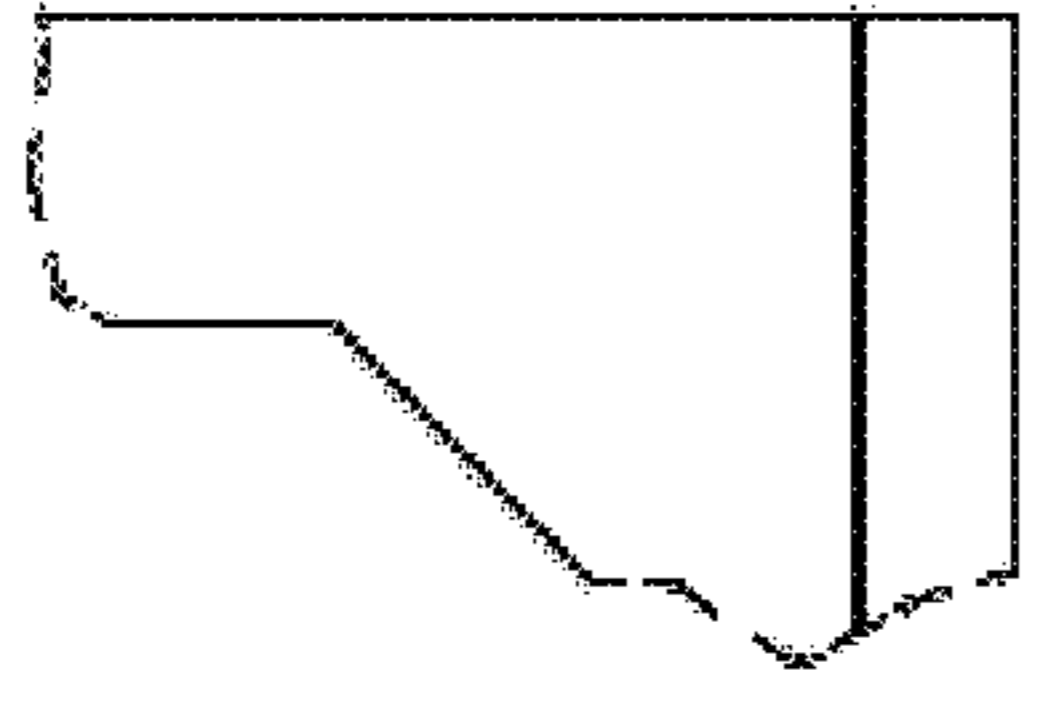


FIG. 21G

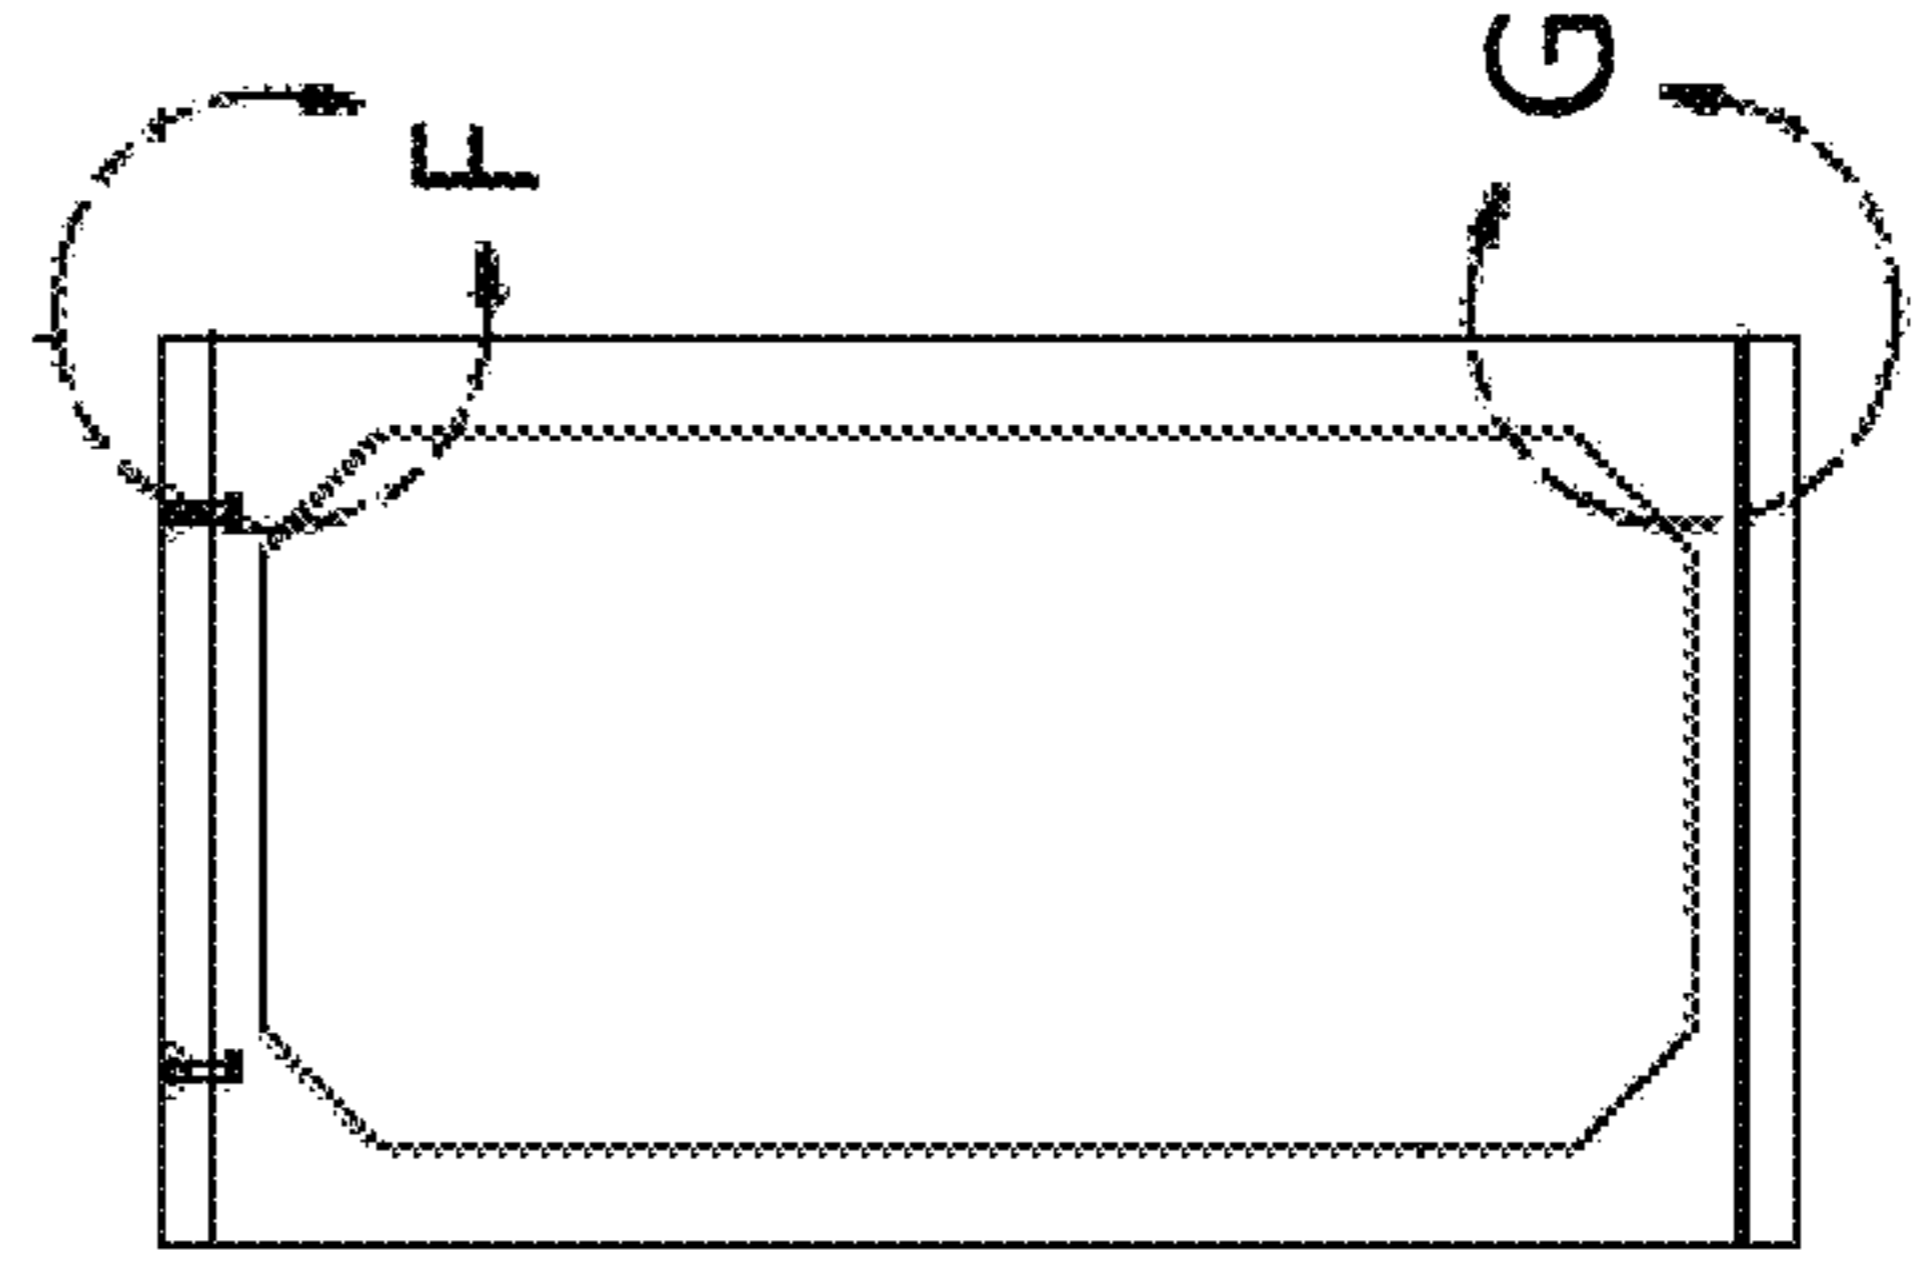


FIG. 21C



FIG. 21D

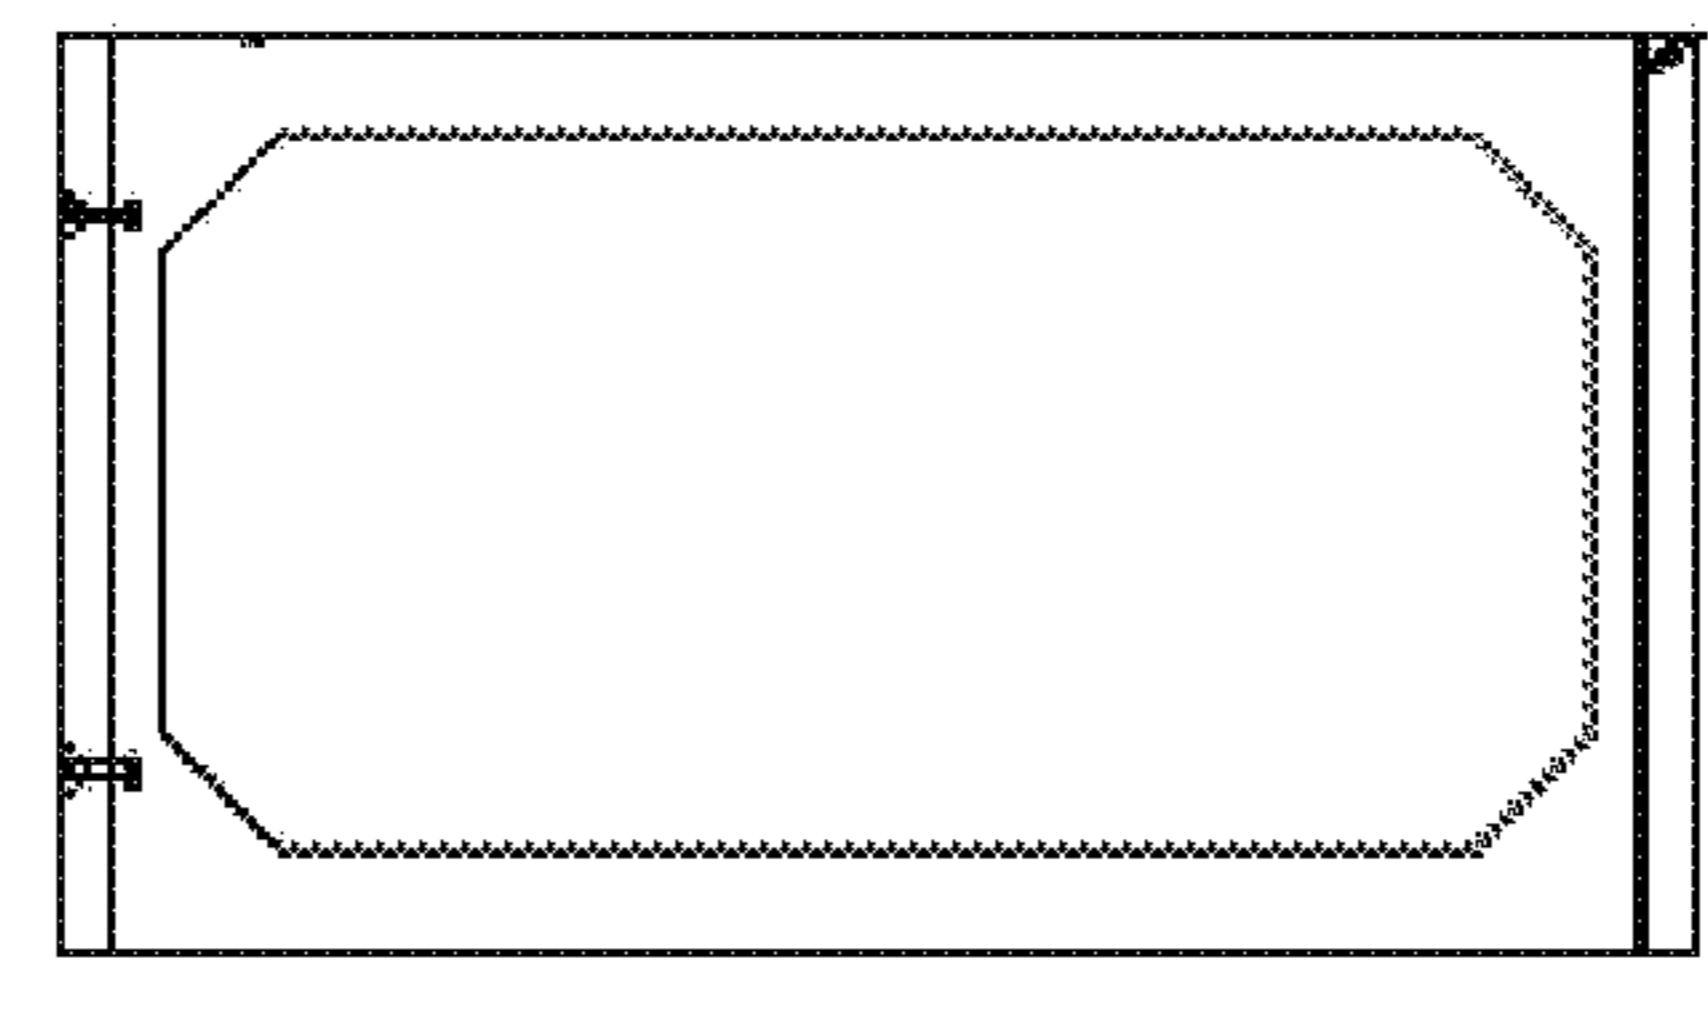


FIG. 21E

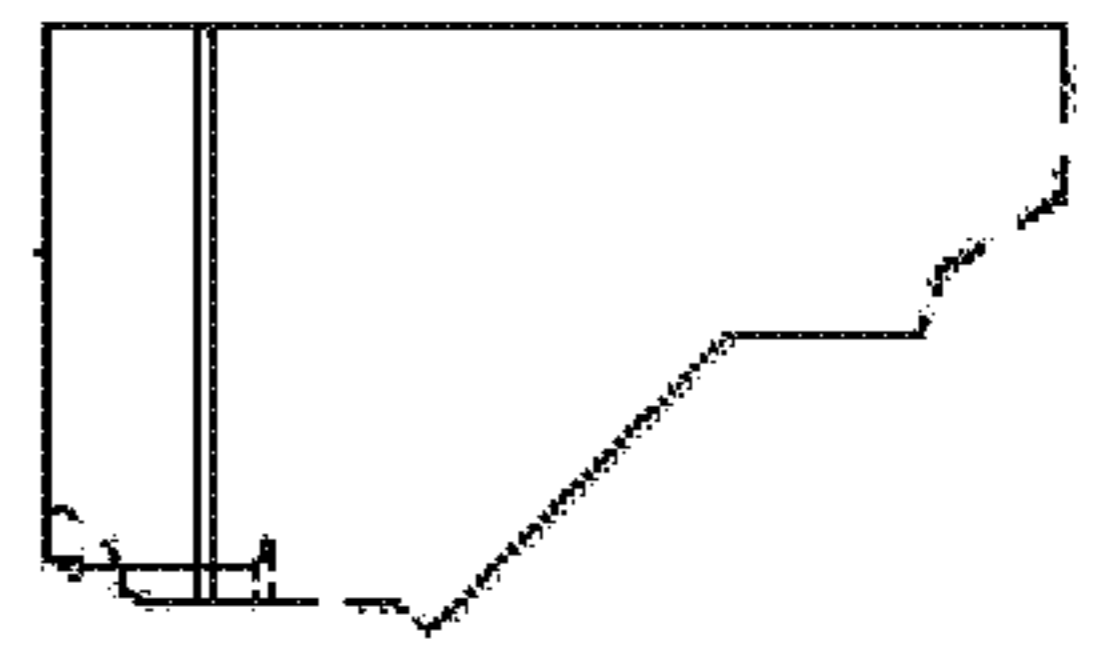


FIG. 21F

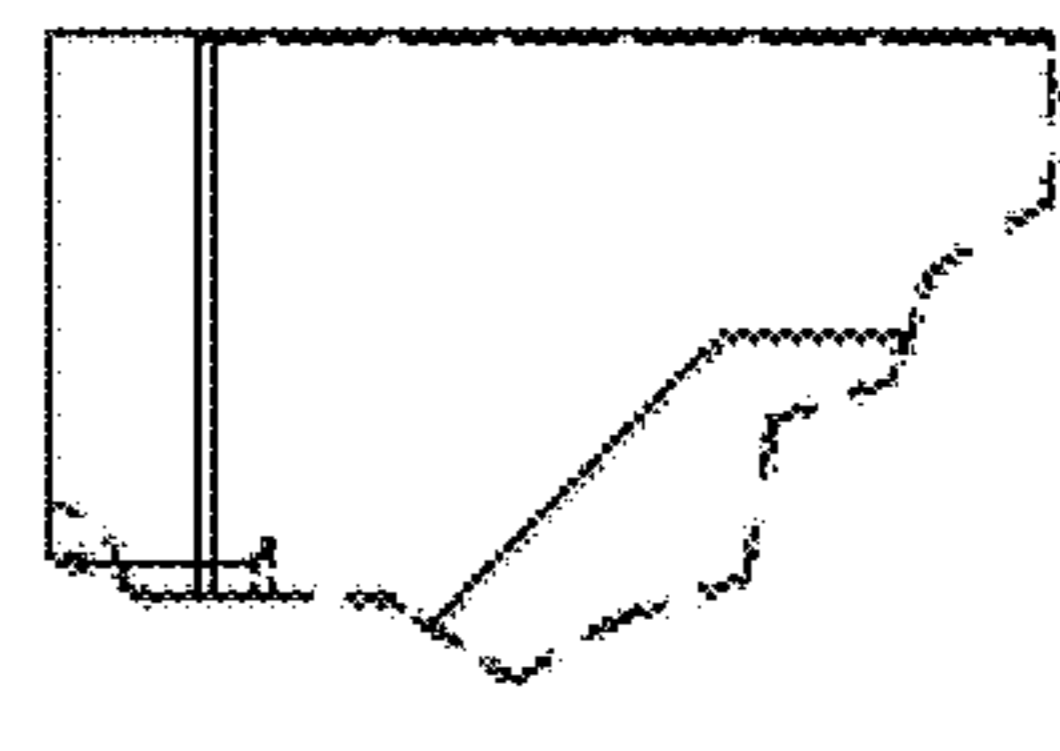
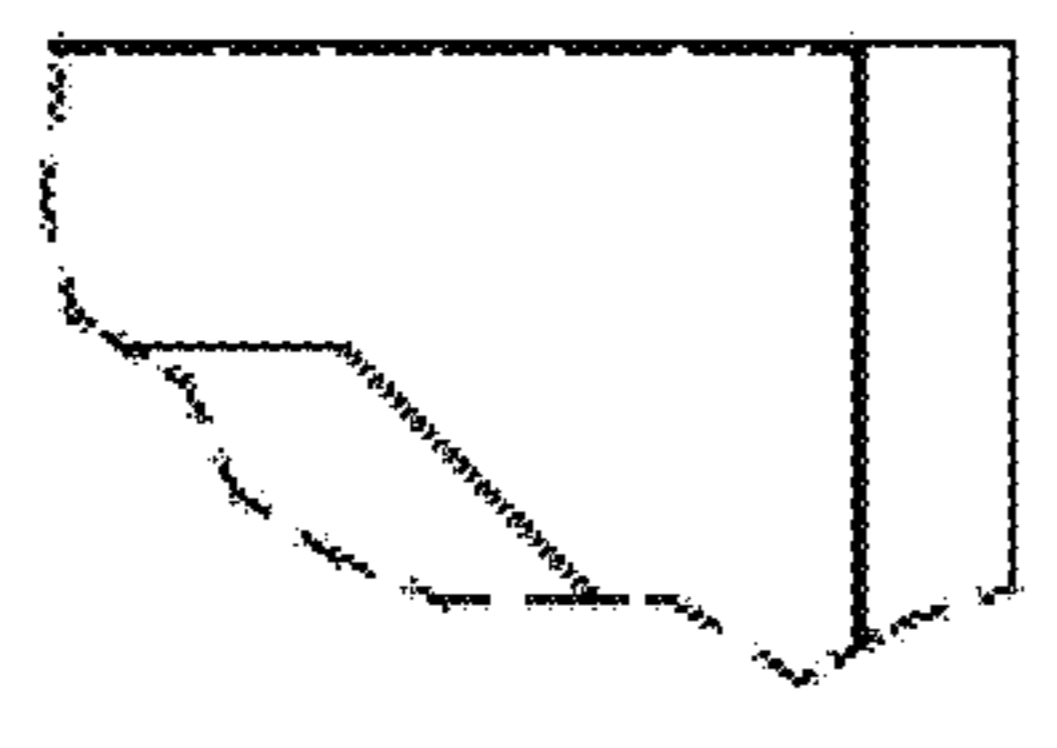
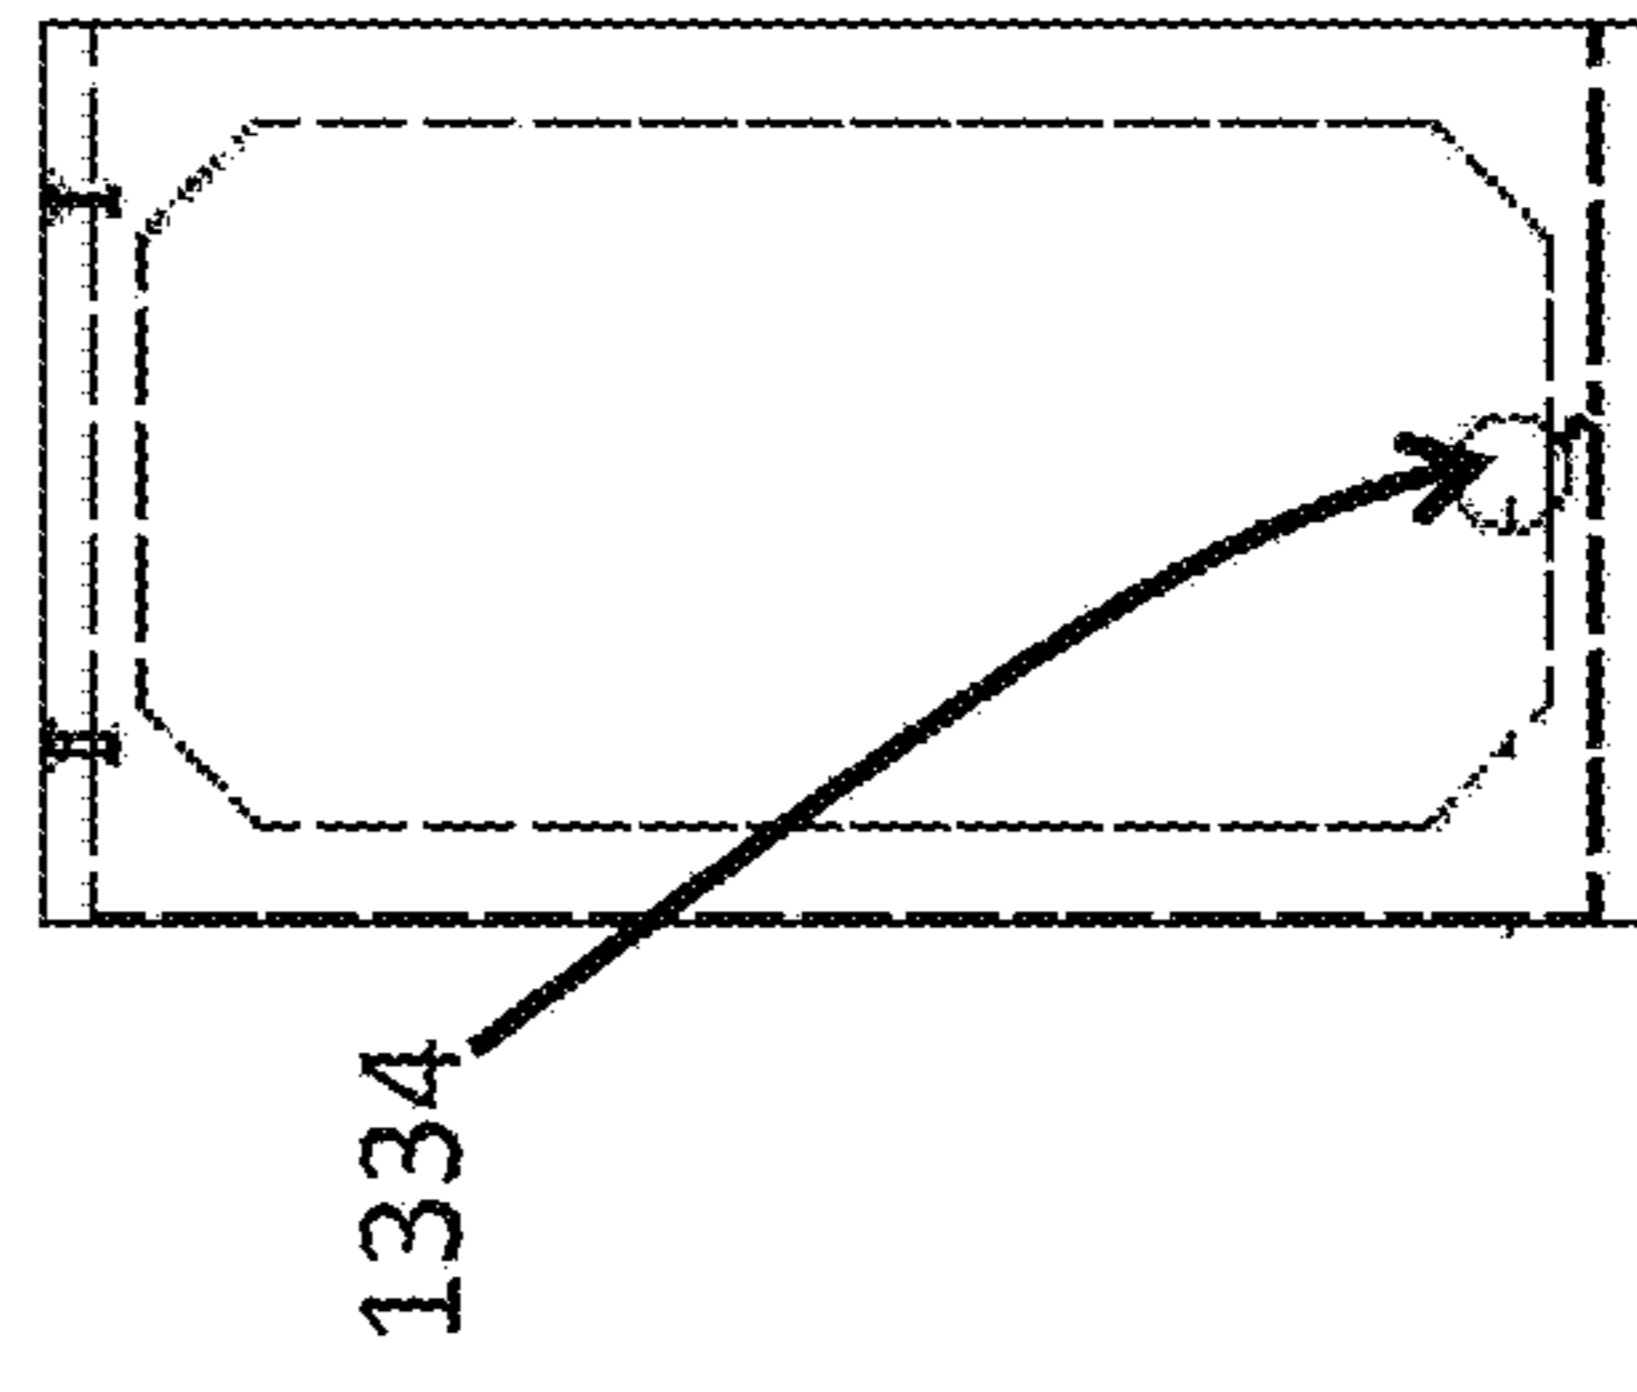
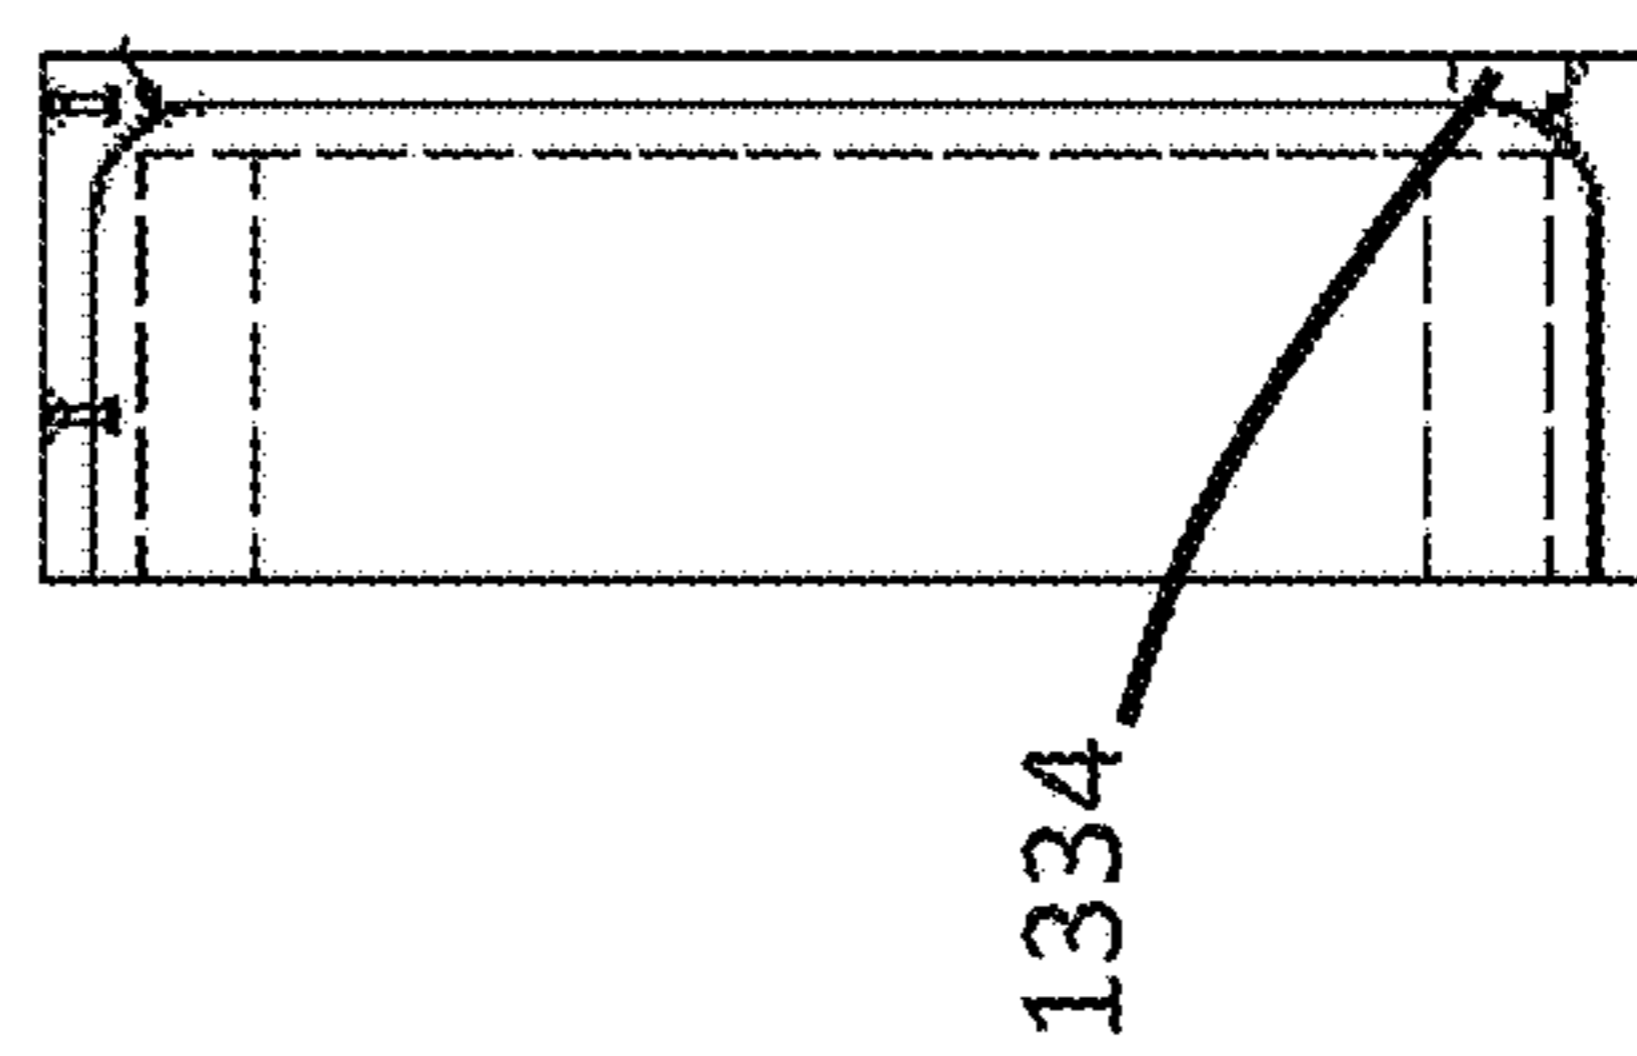
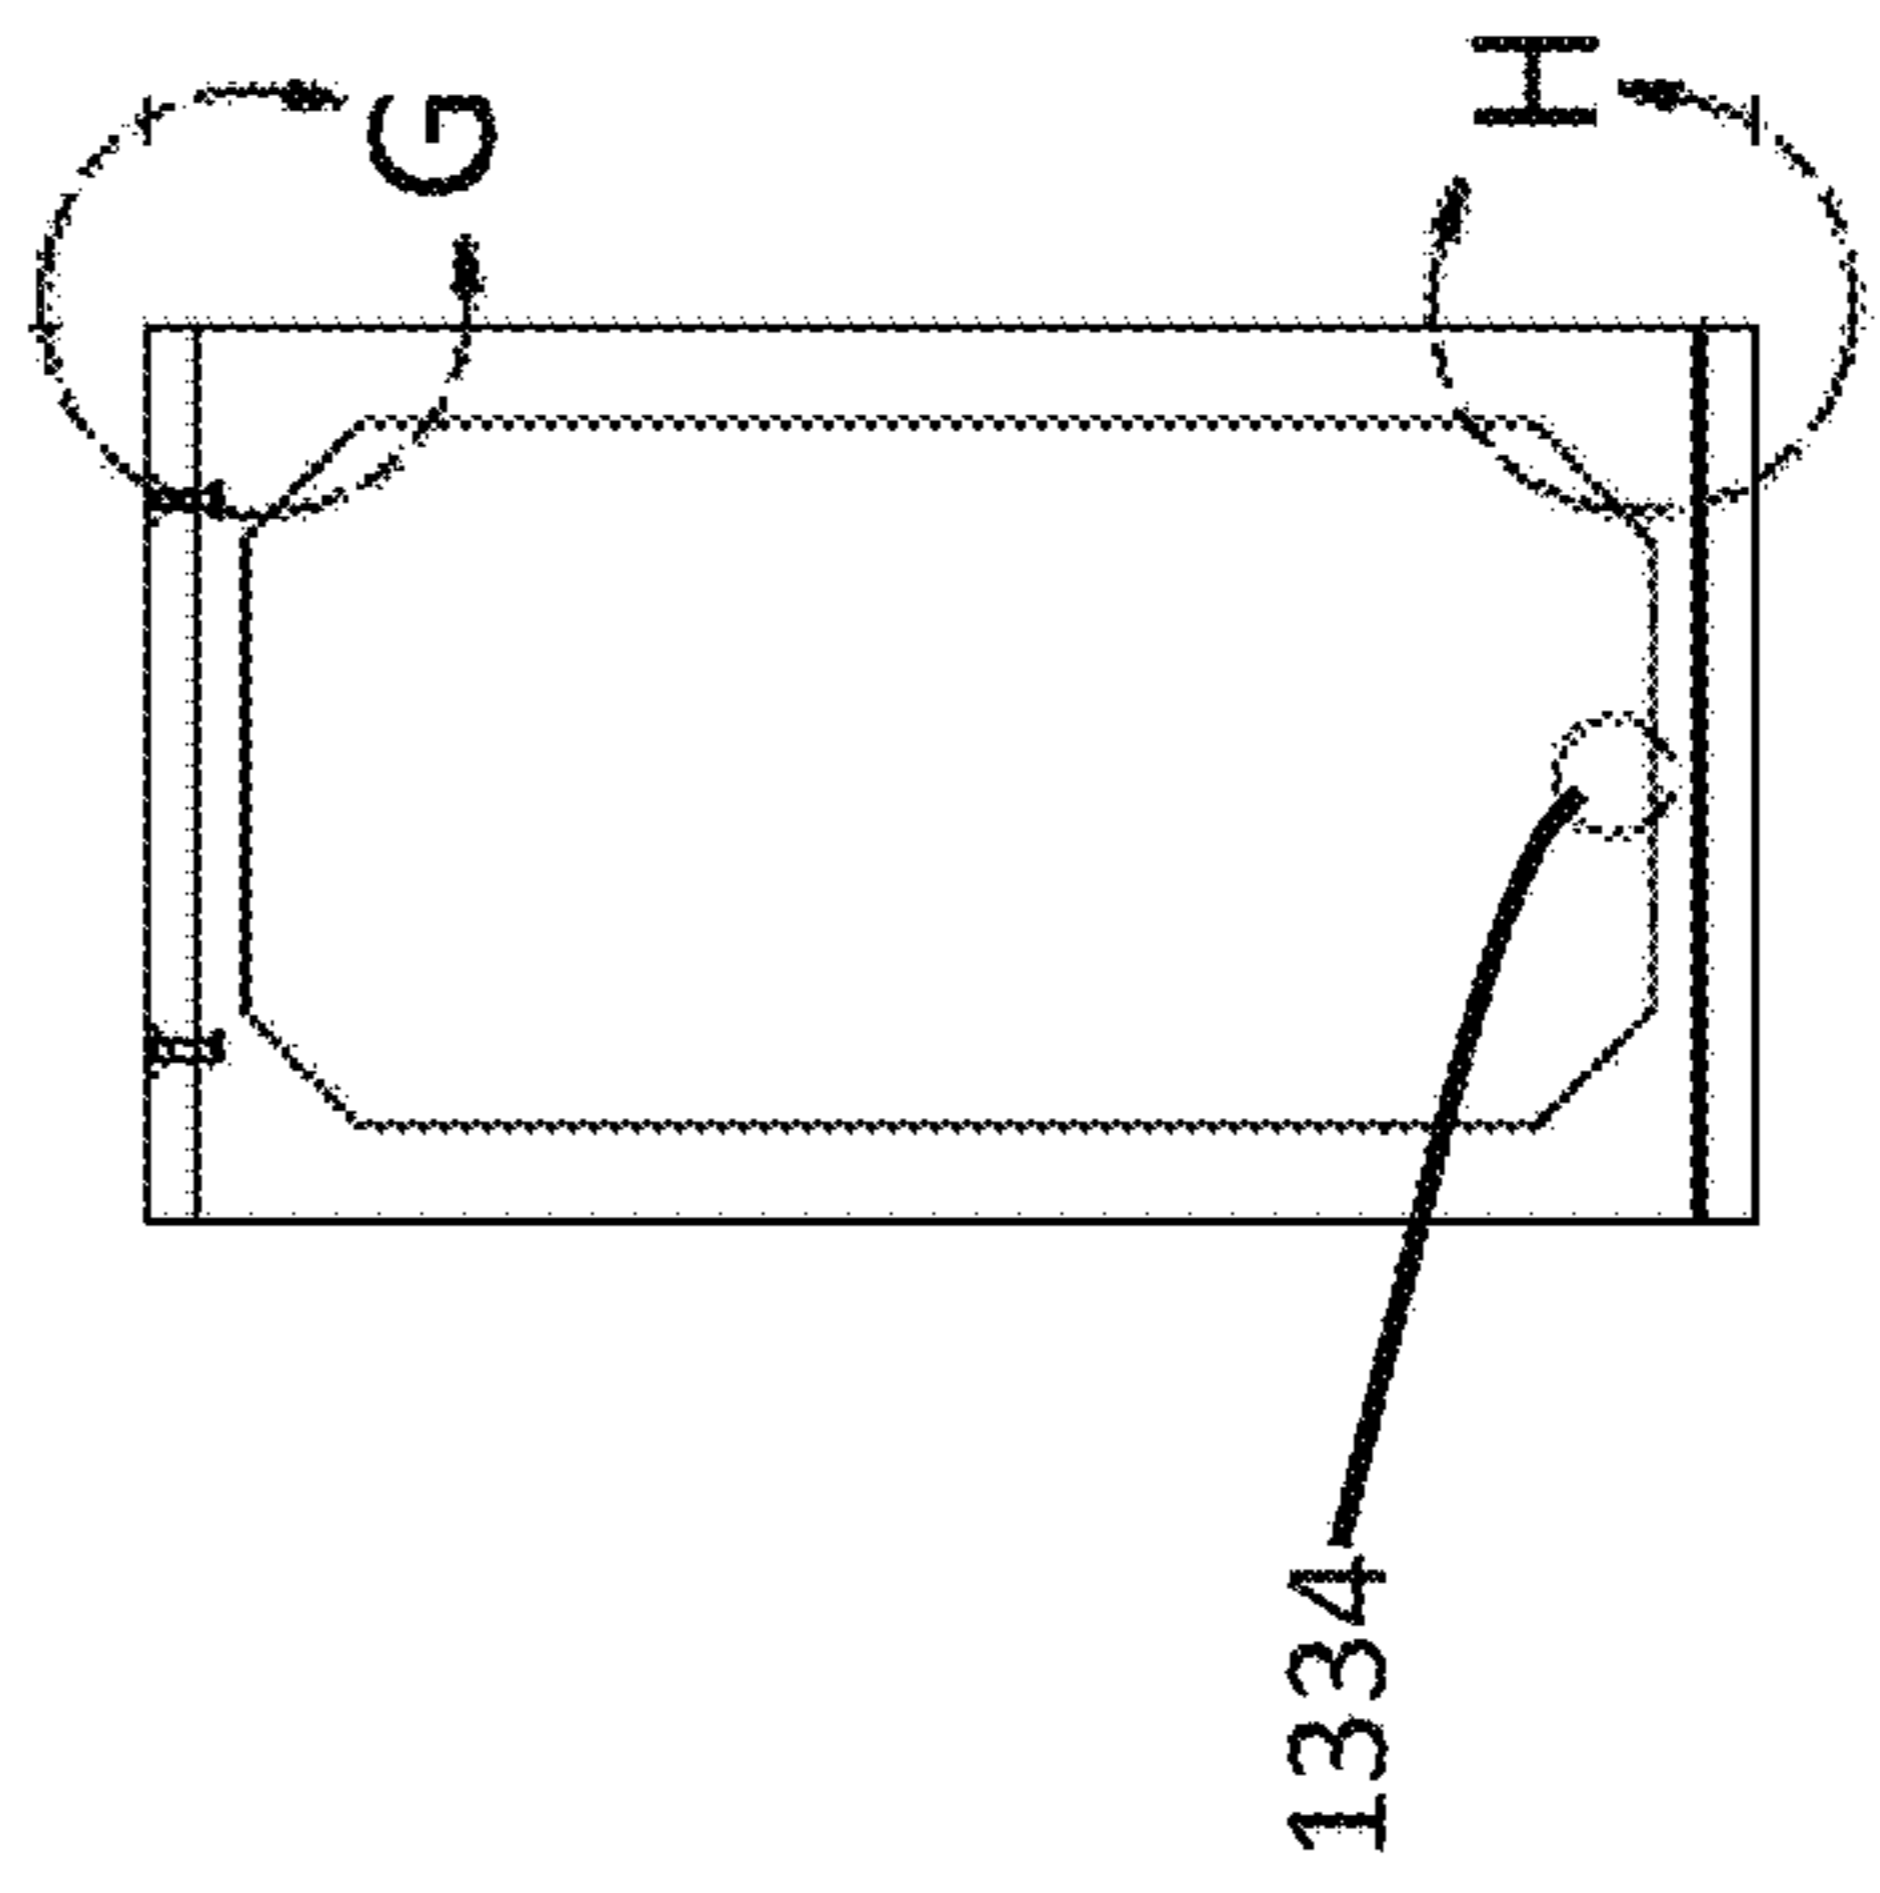
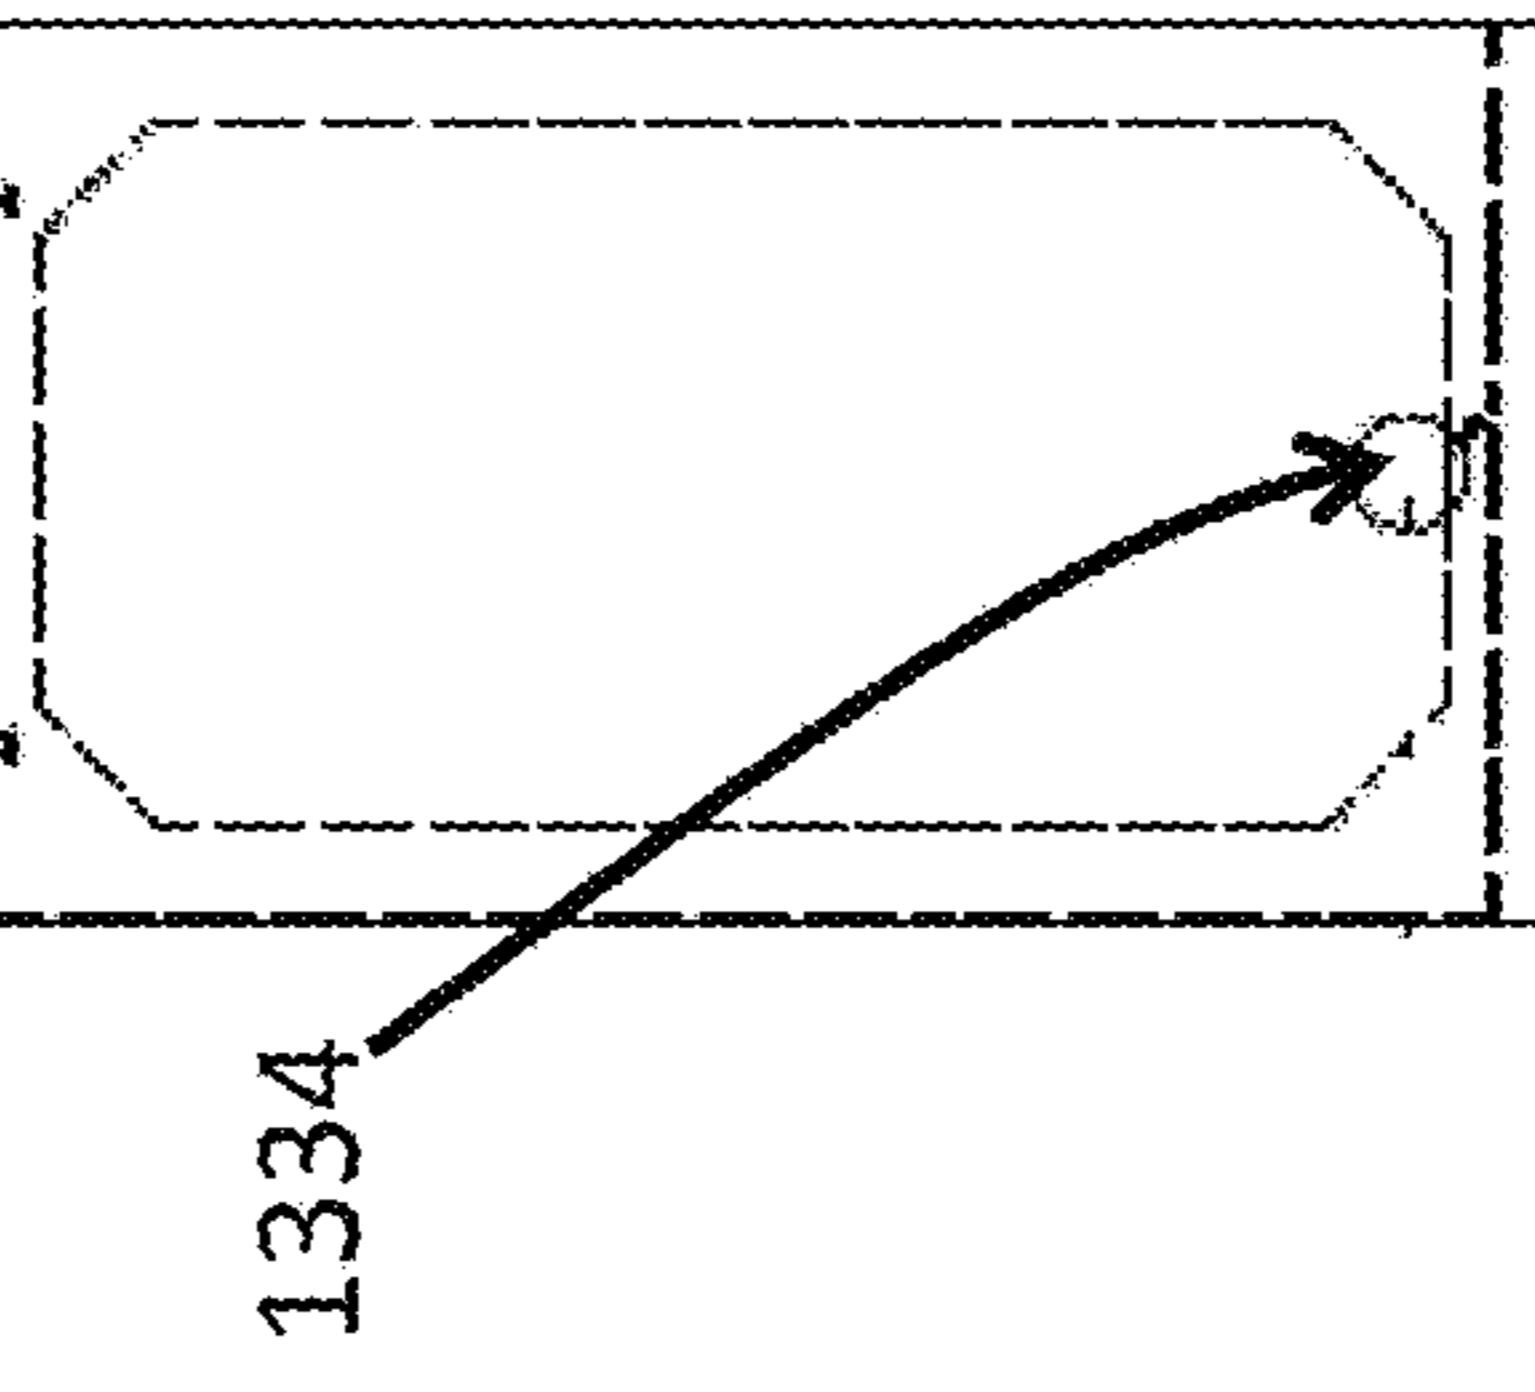
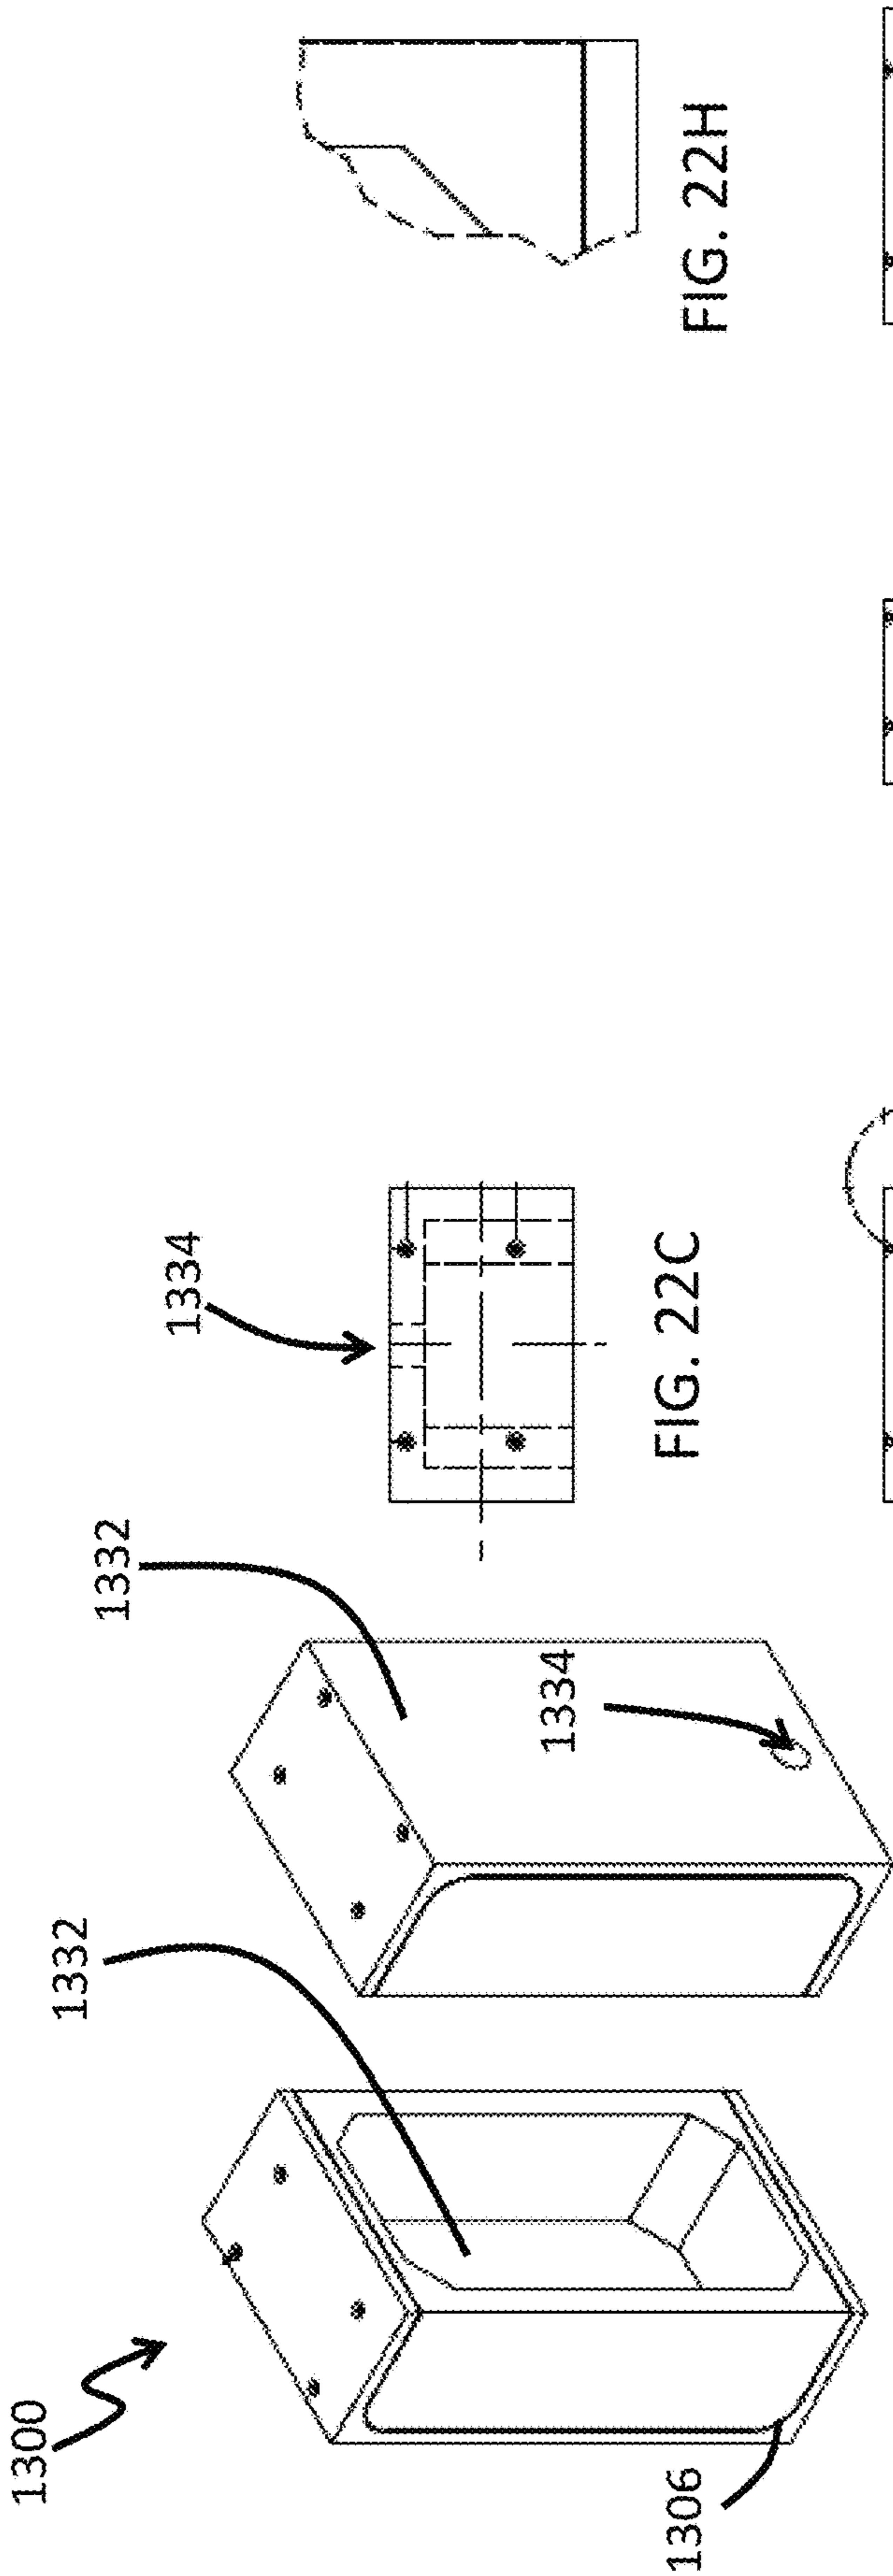


FIG. 22A

FIG. 22B

FIG. 22C

FIG. 22D

FIG. 22E

FIG. 22F

FIG. 22G

FIG. 22H

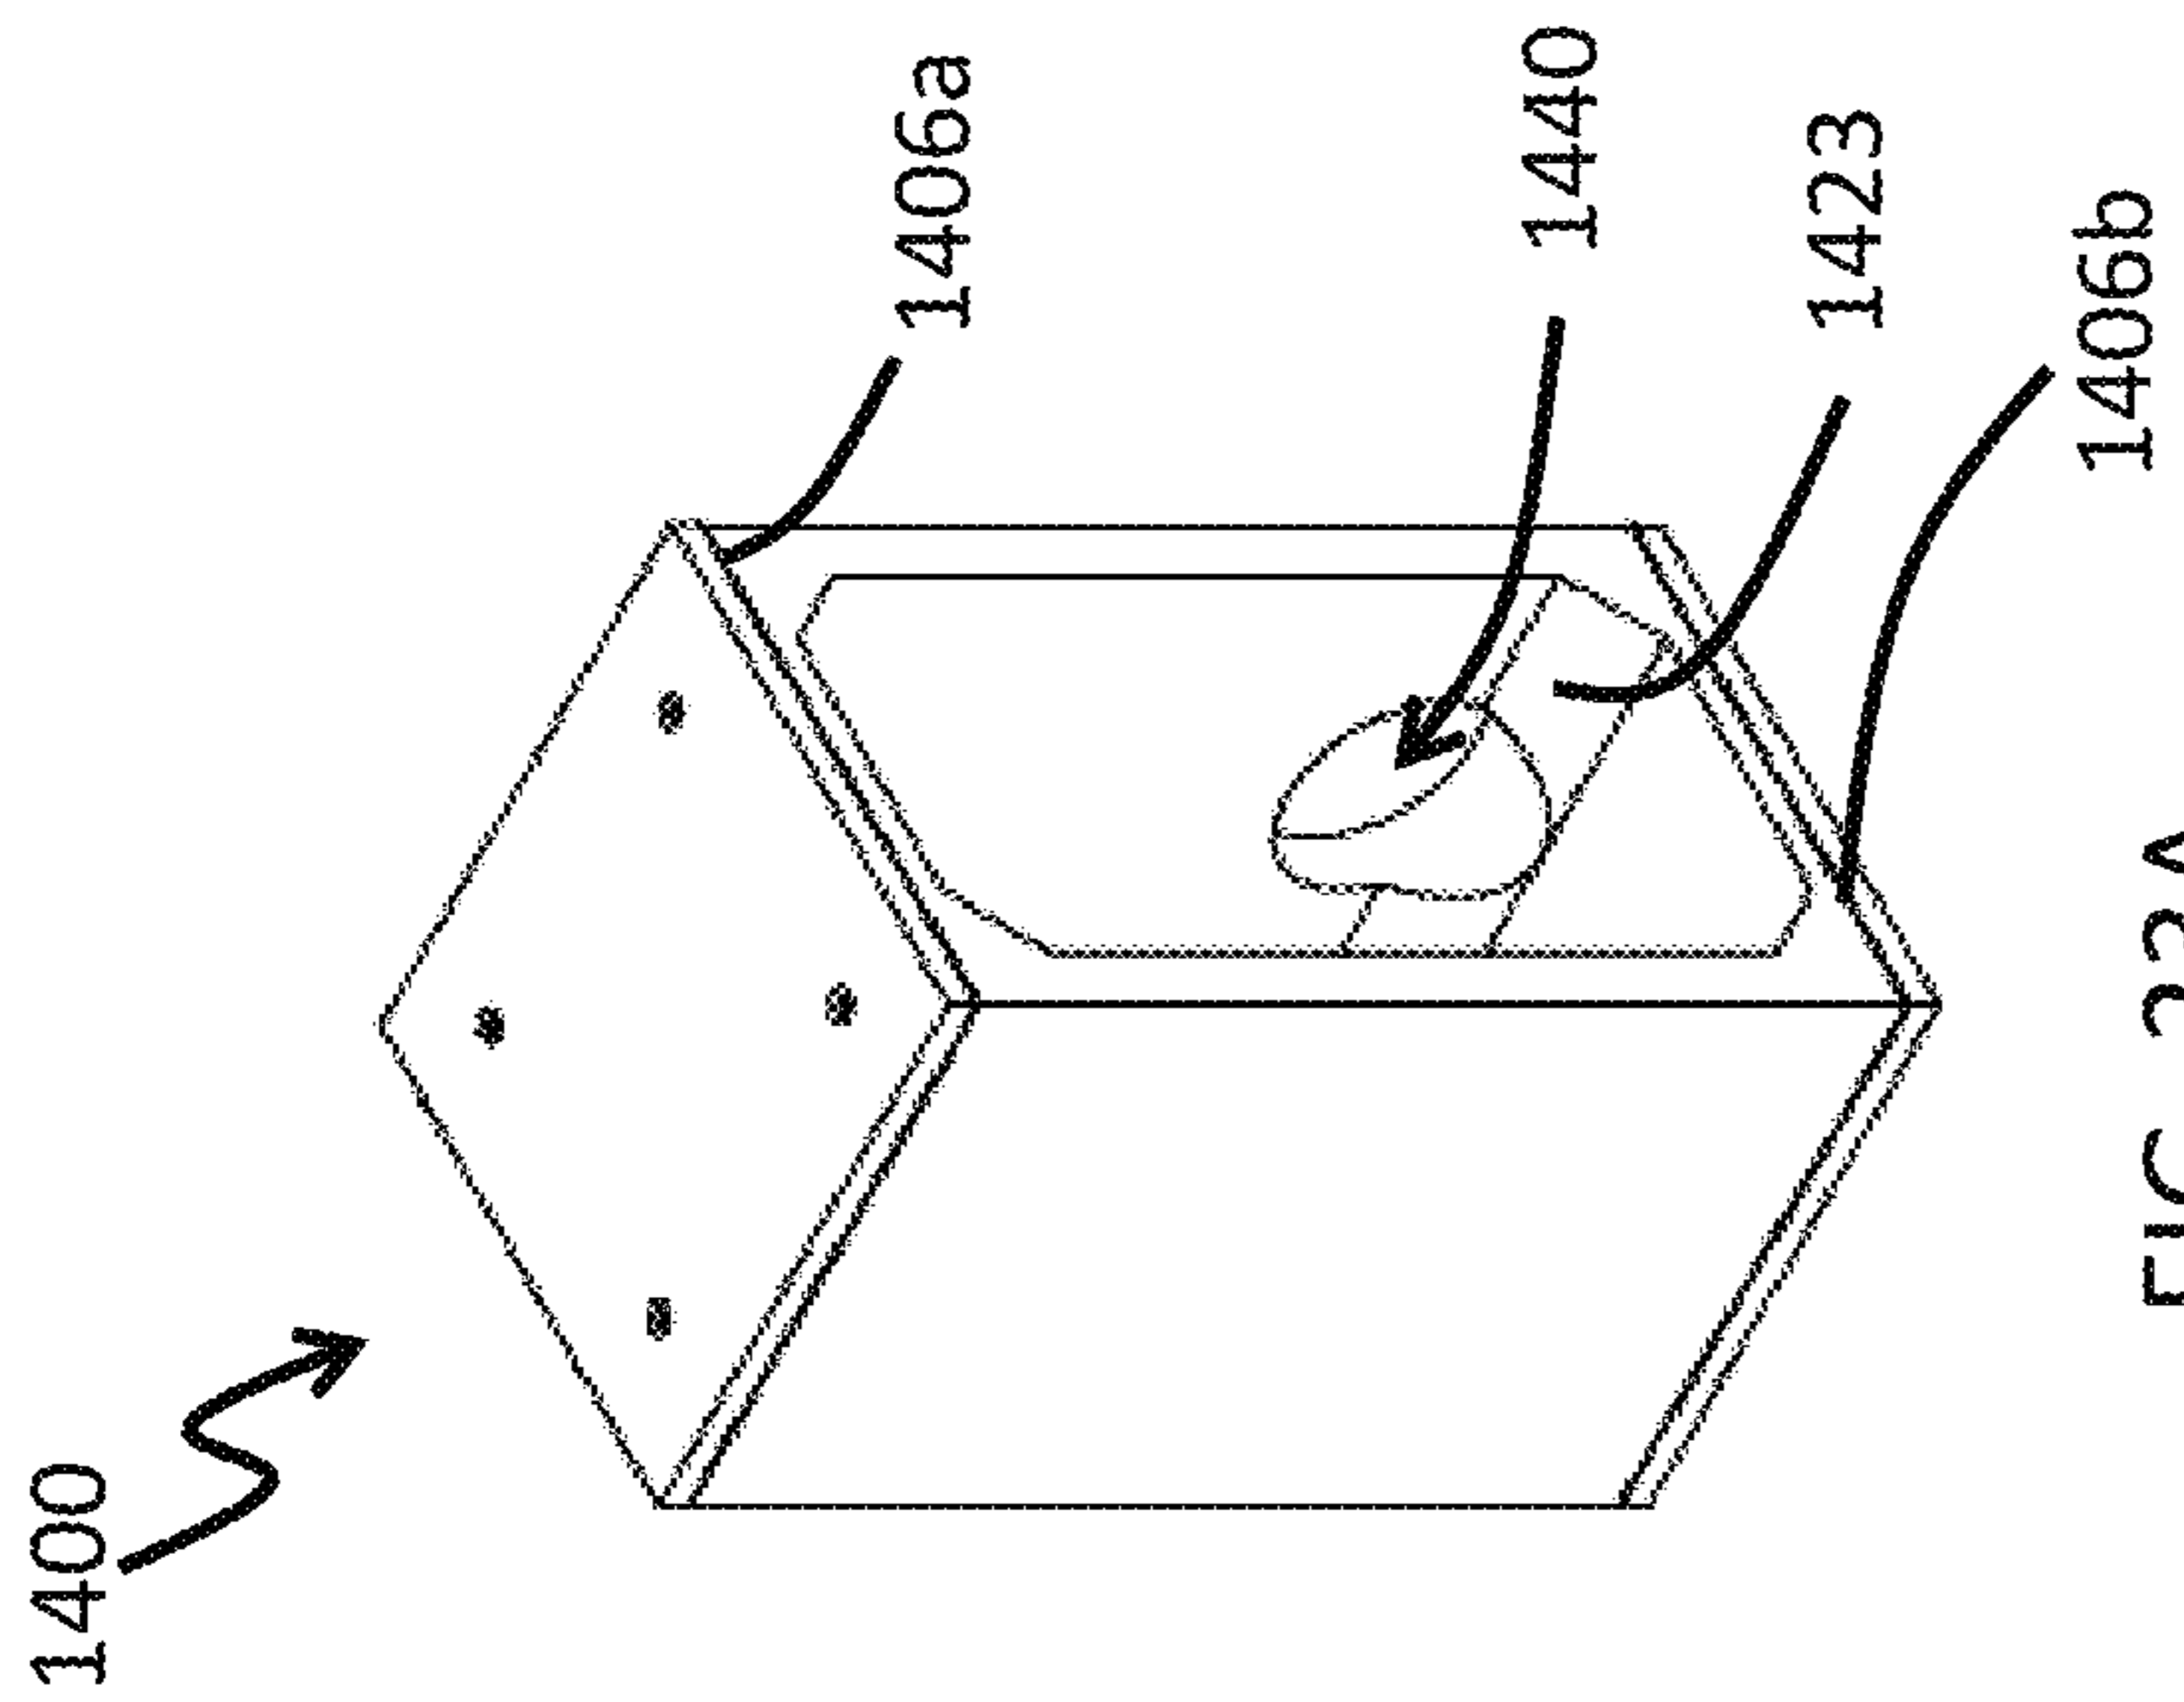


FIG. 23A

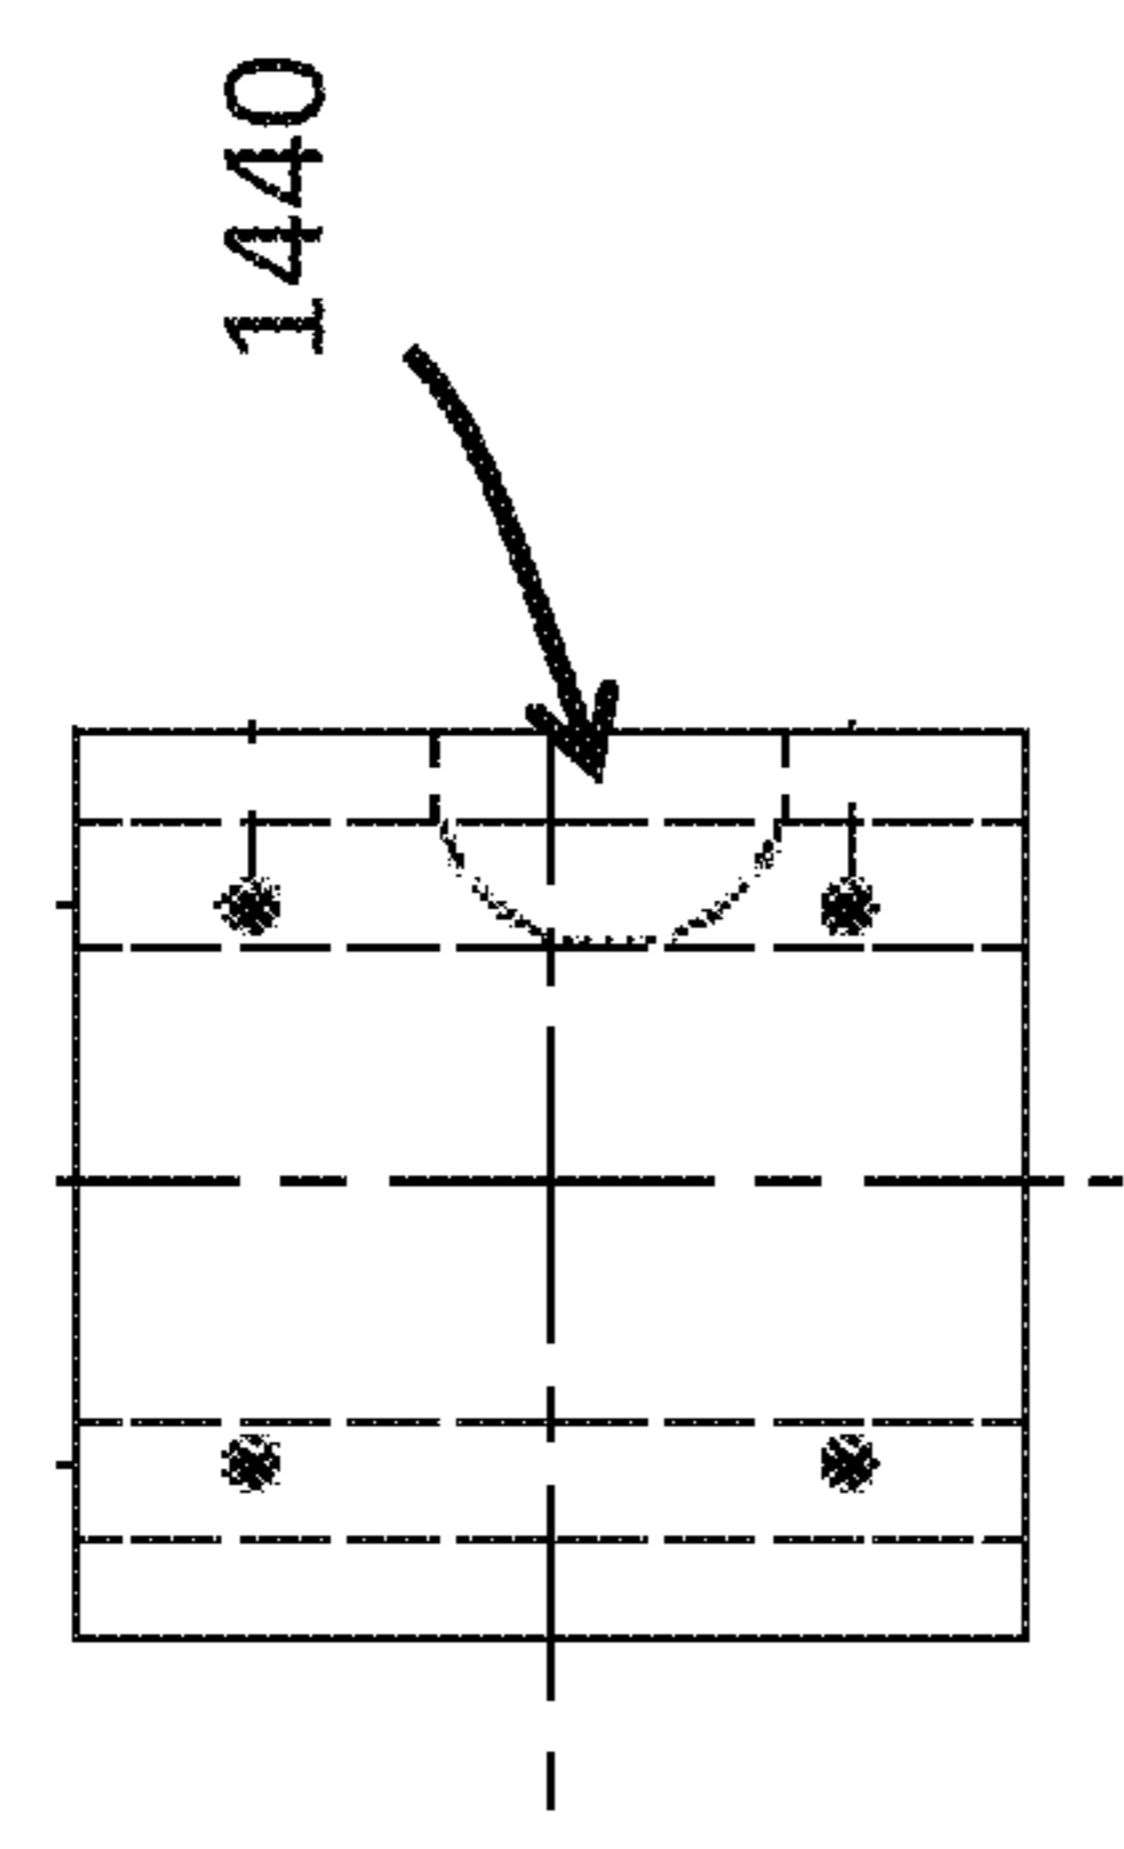


FIG. 23B

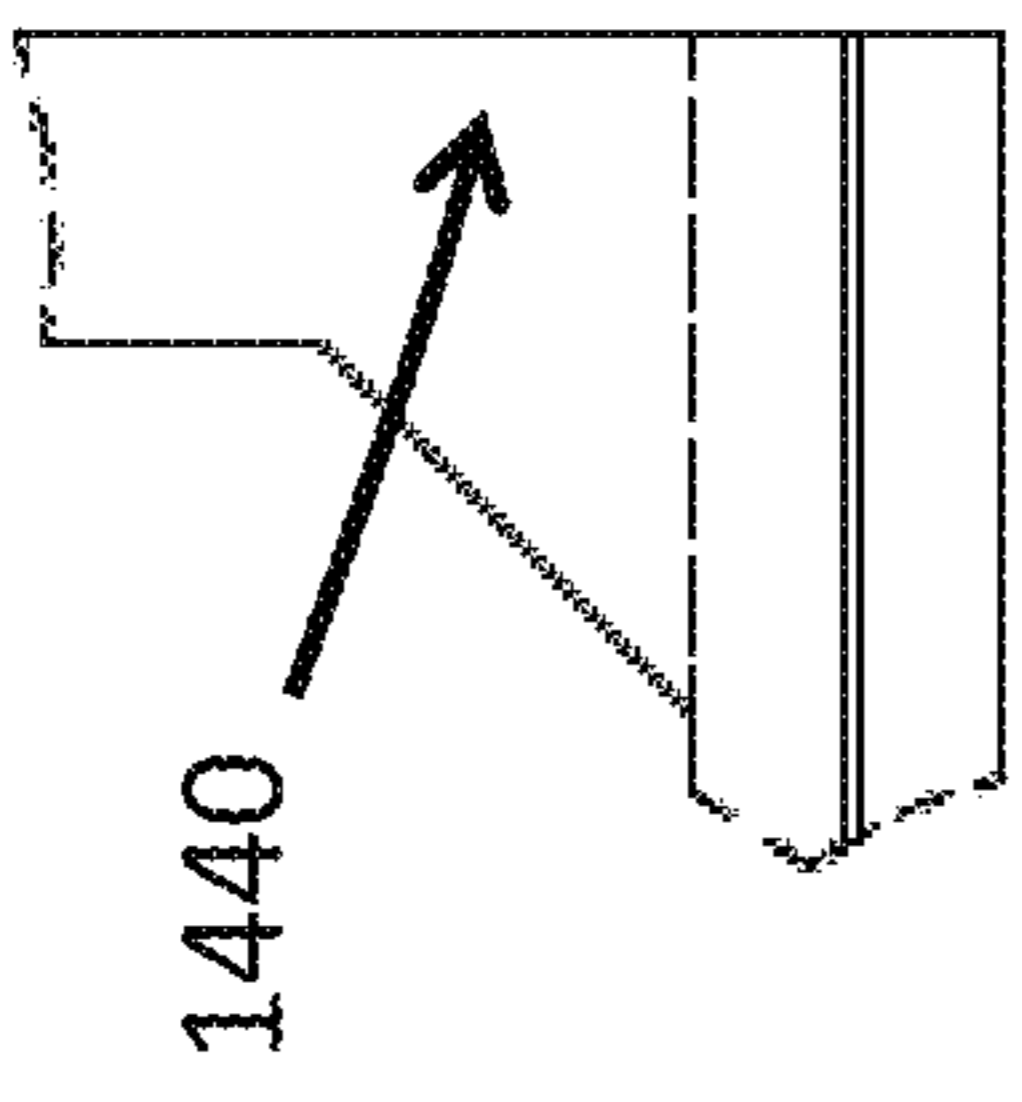


FIG. 23G

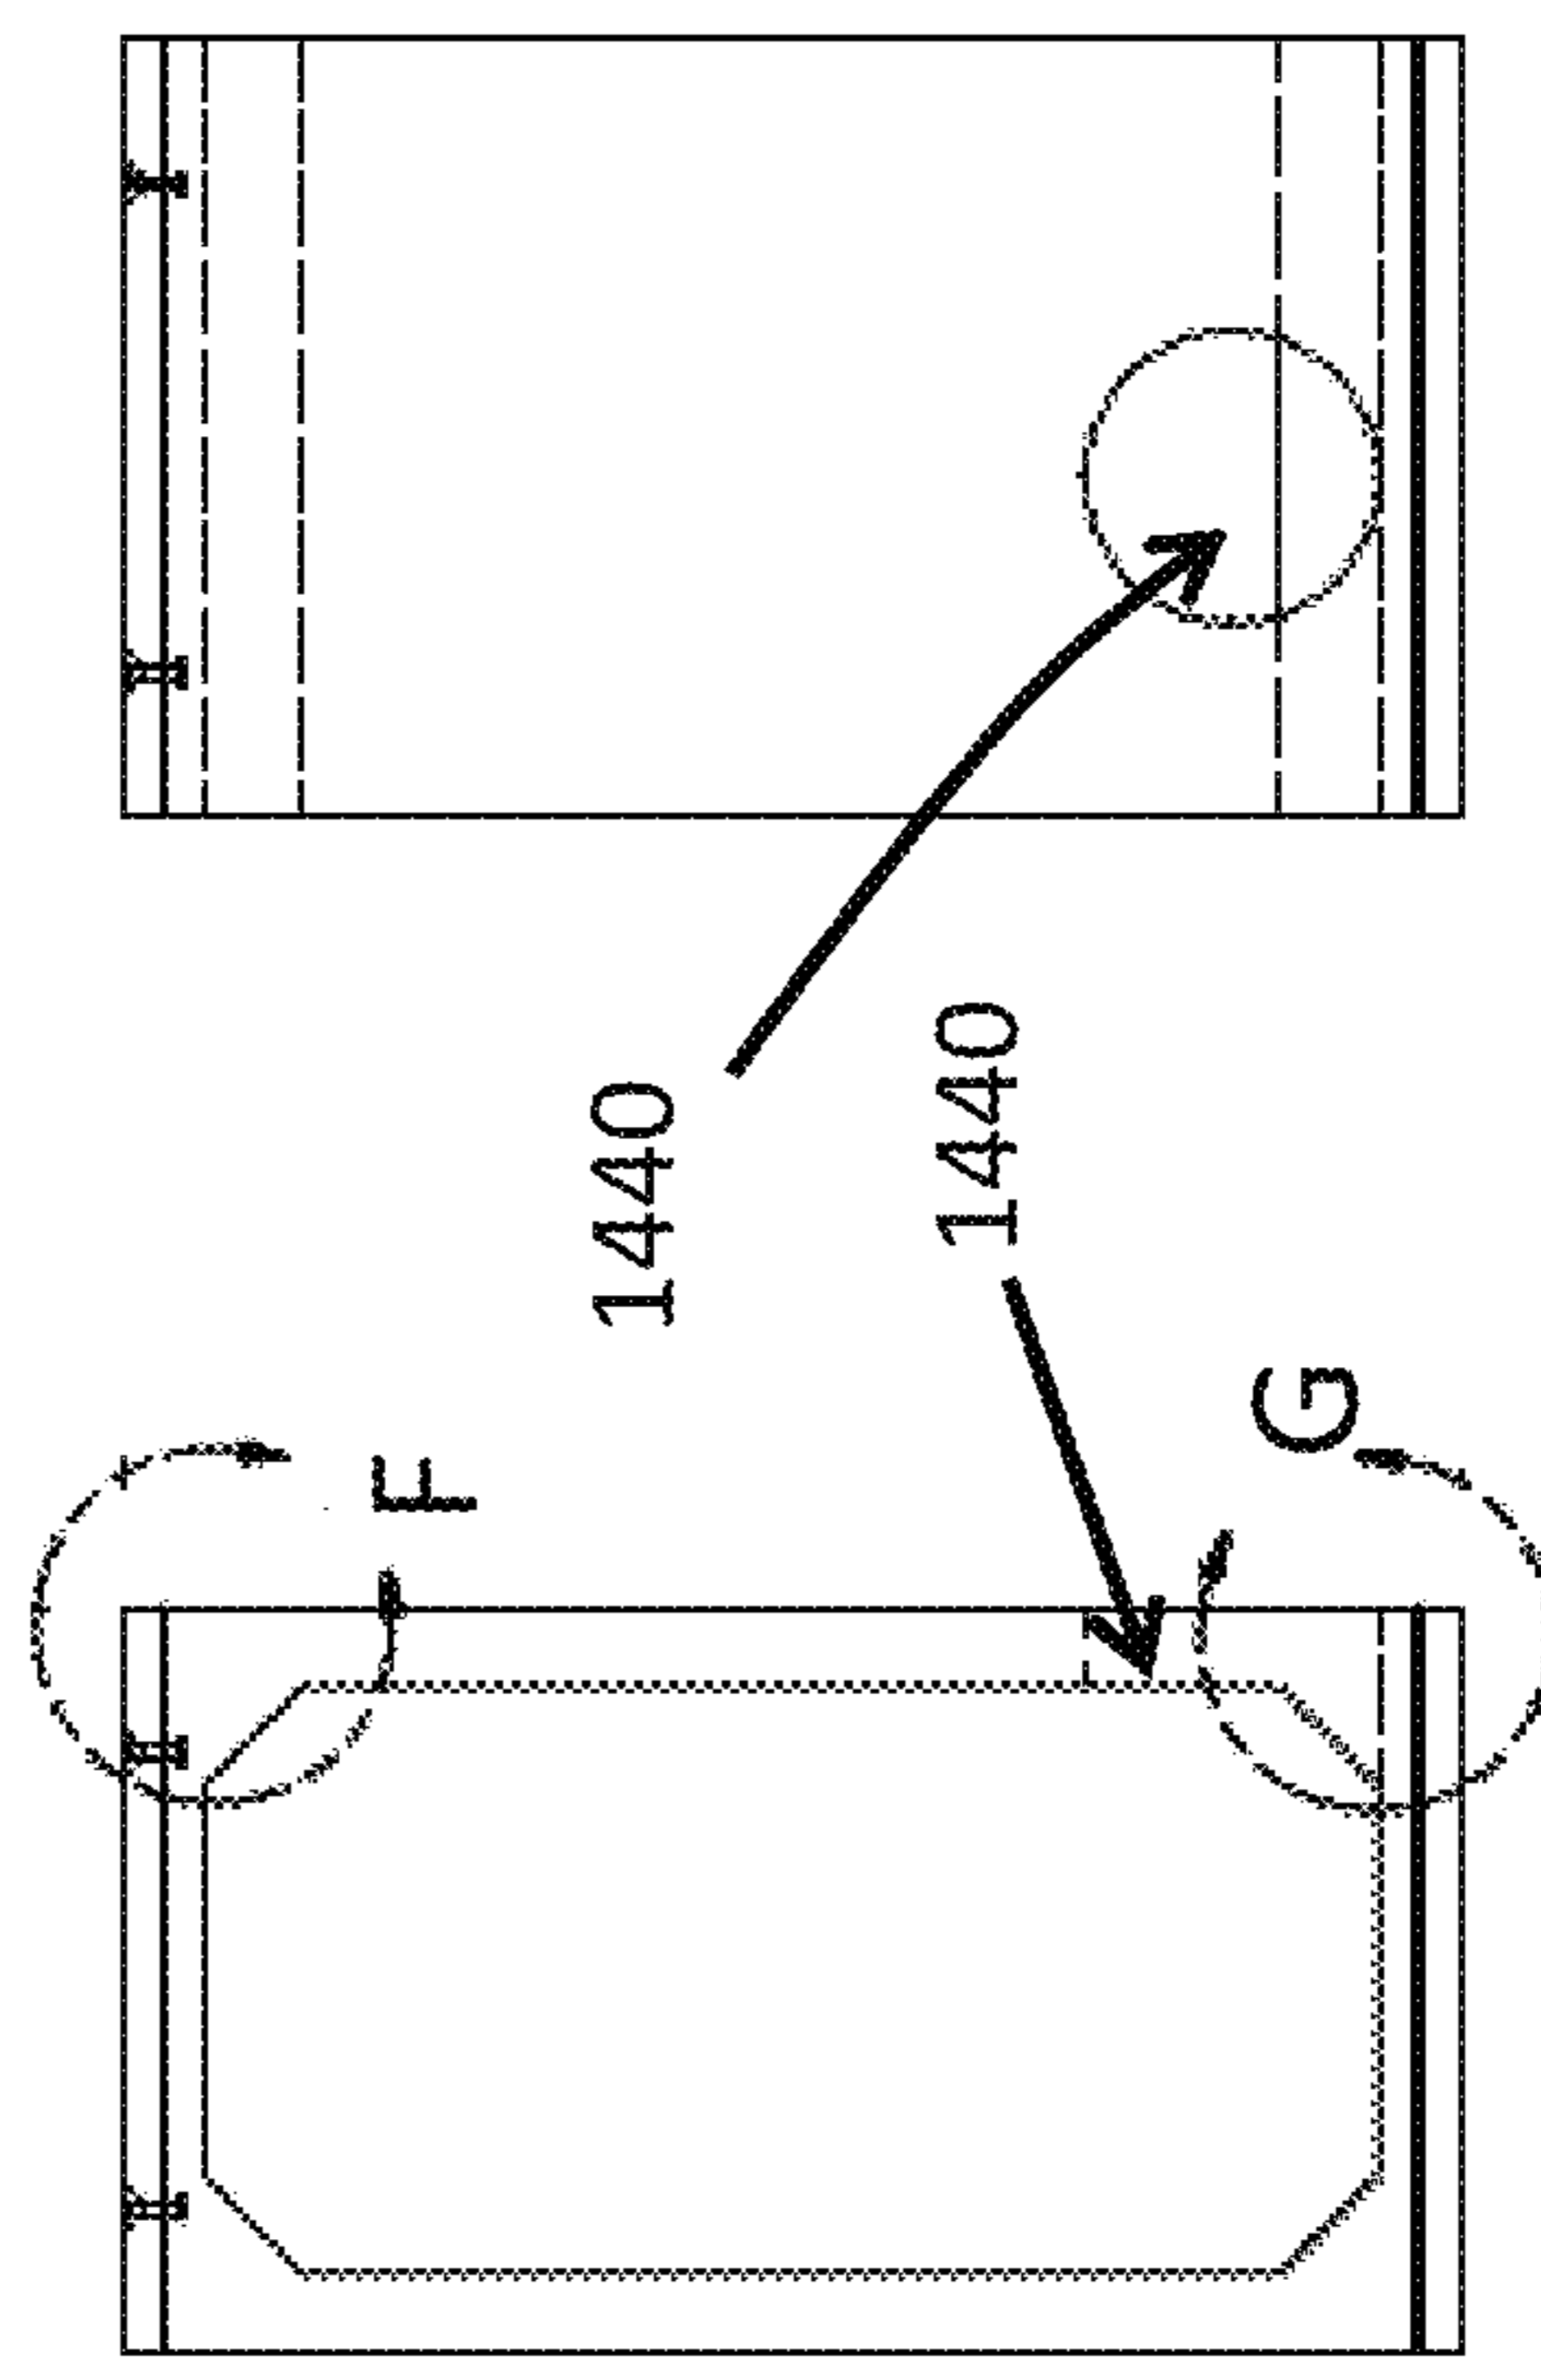


FIG. 23C

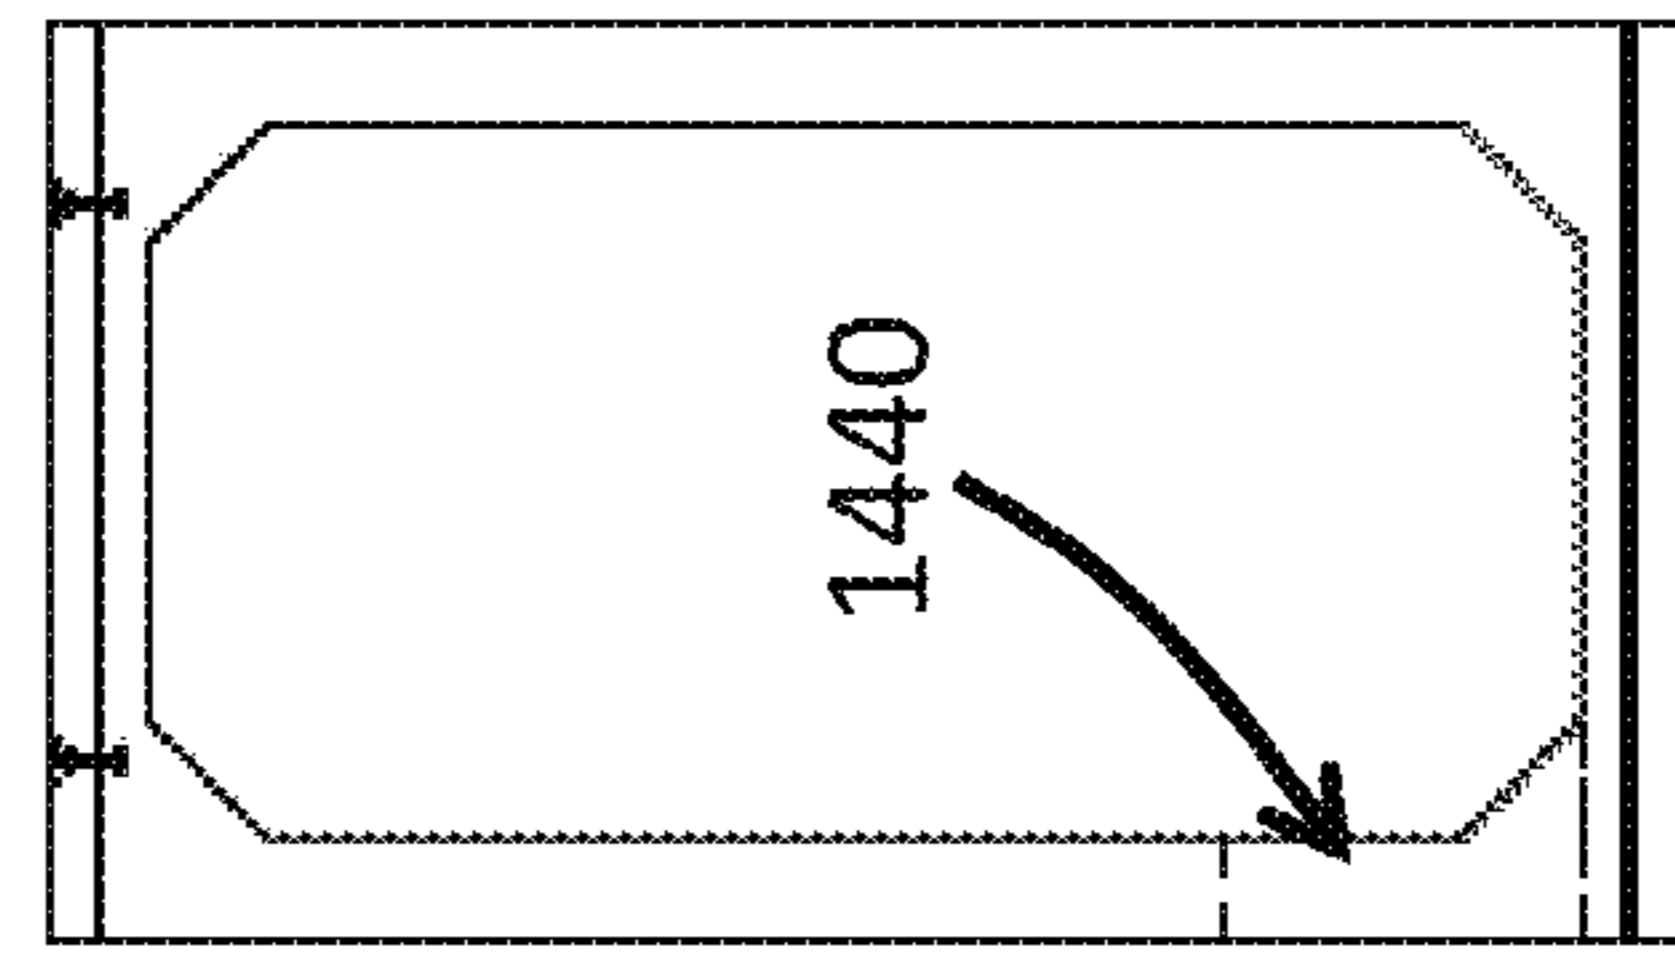


FIG. 23E

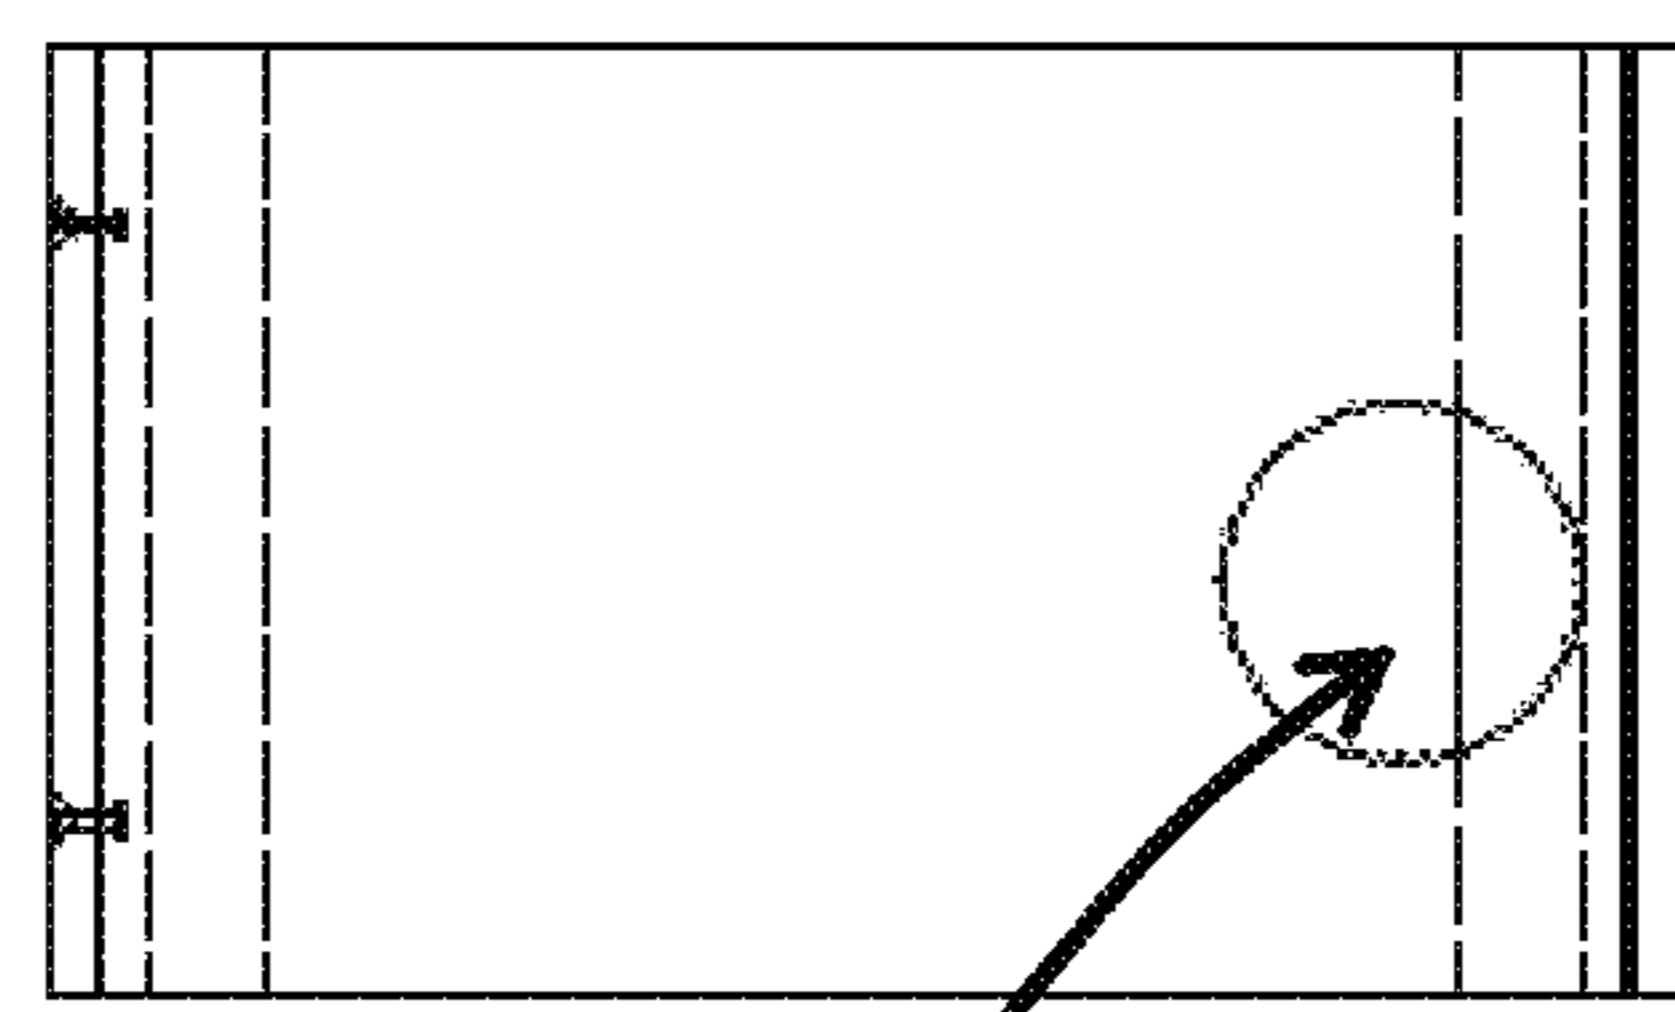


FIG. 23D

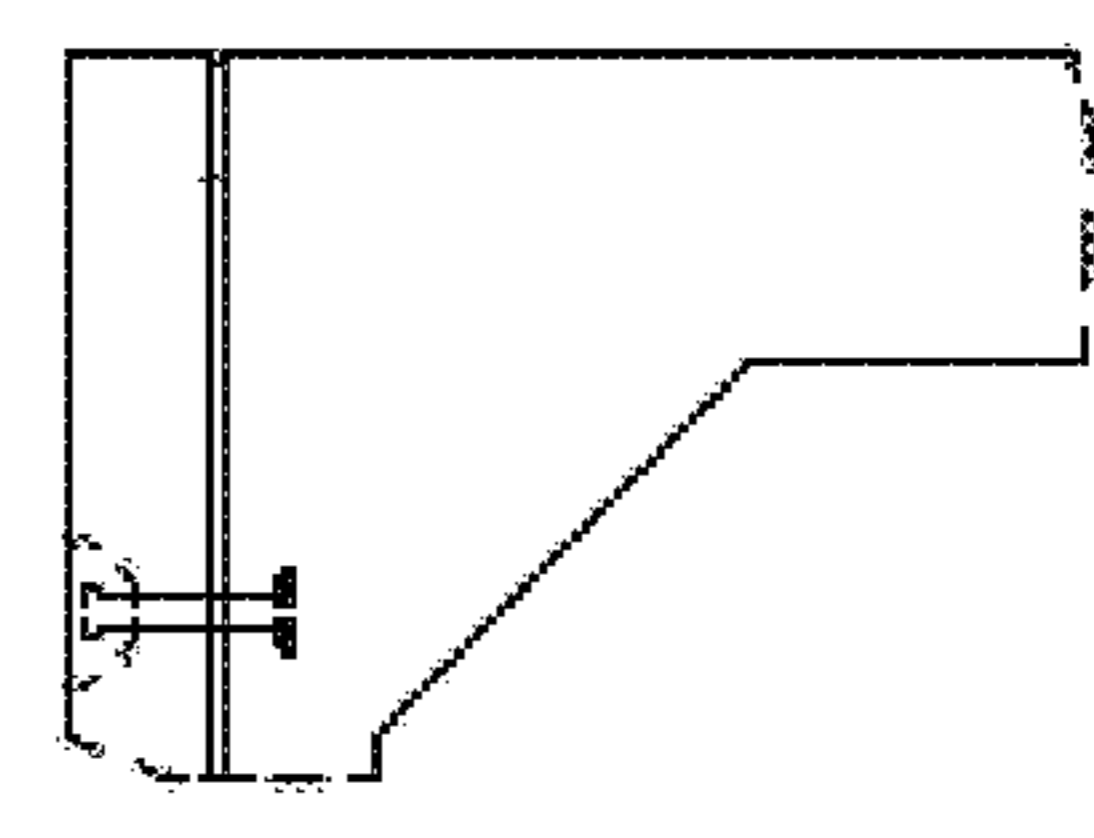


FIG. 23F

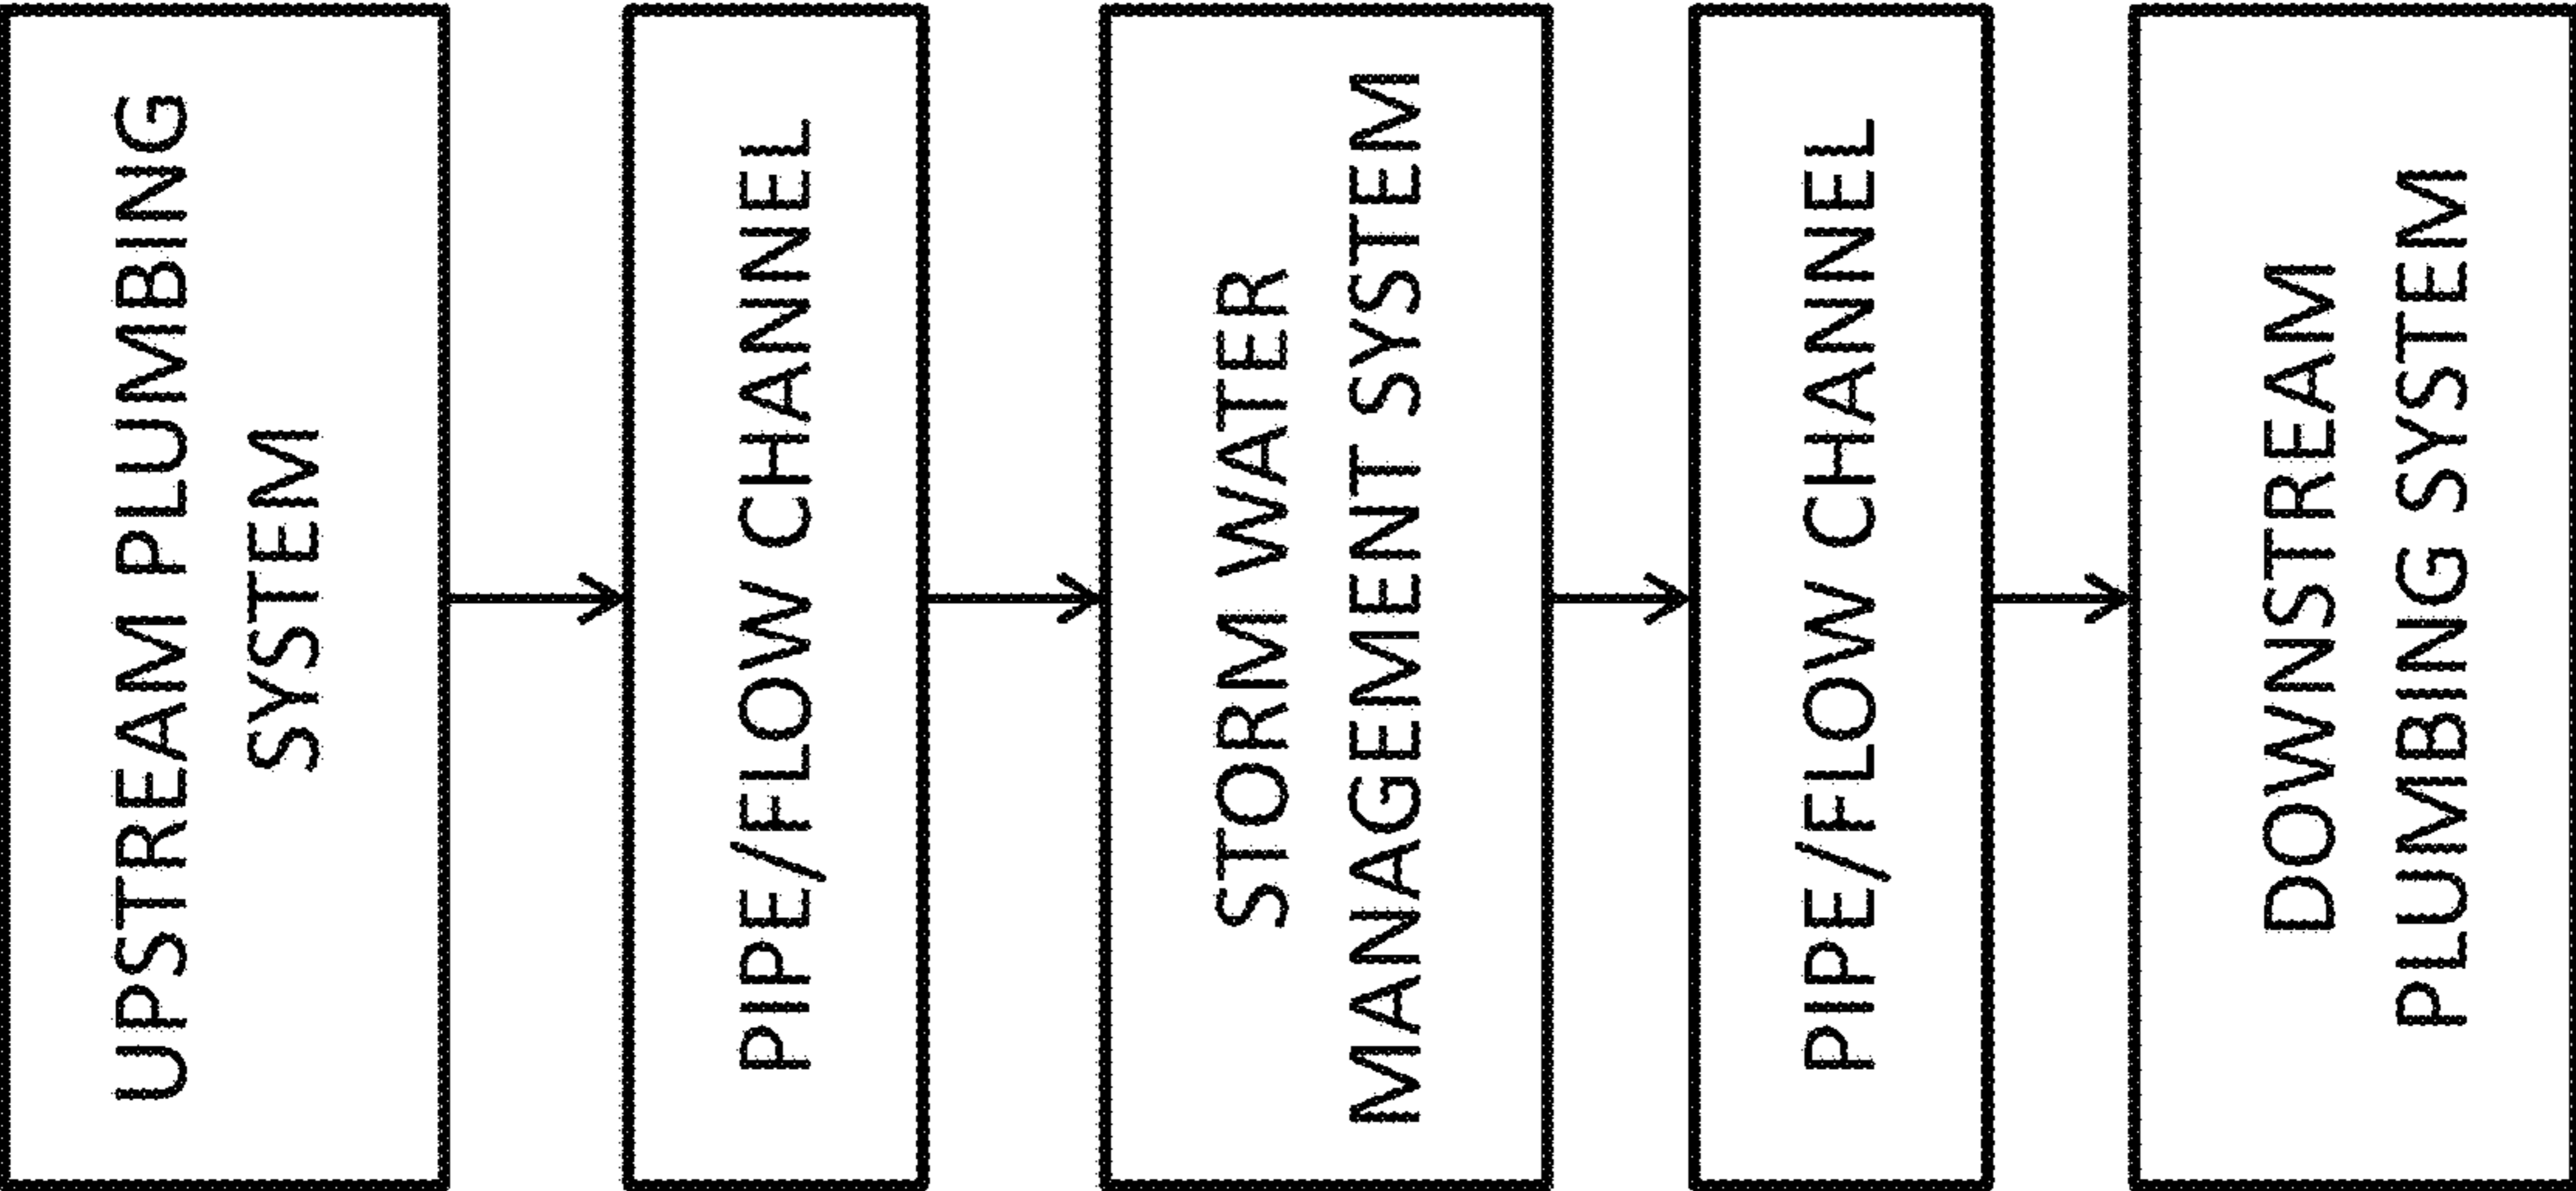


FIG. 24

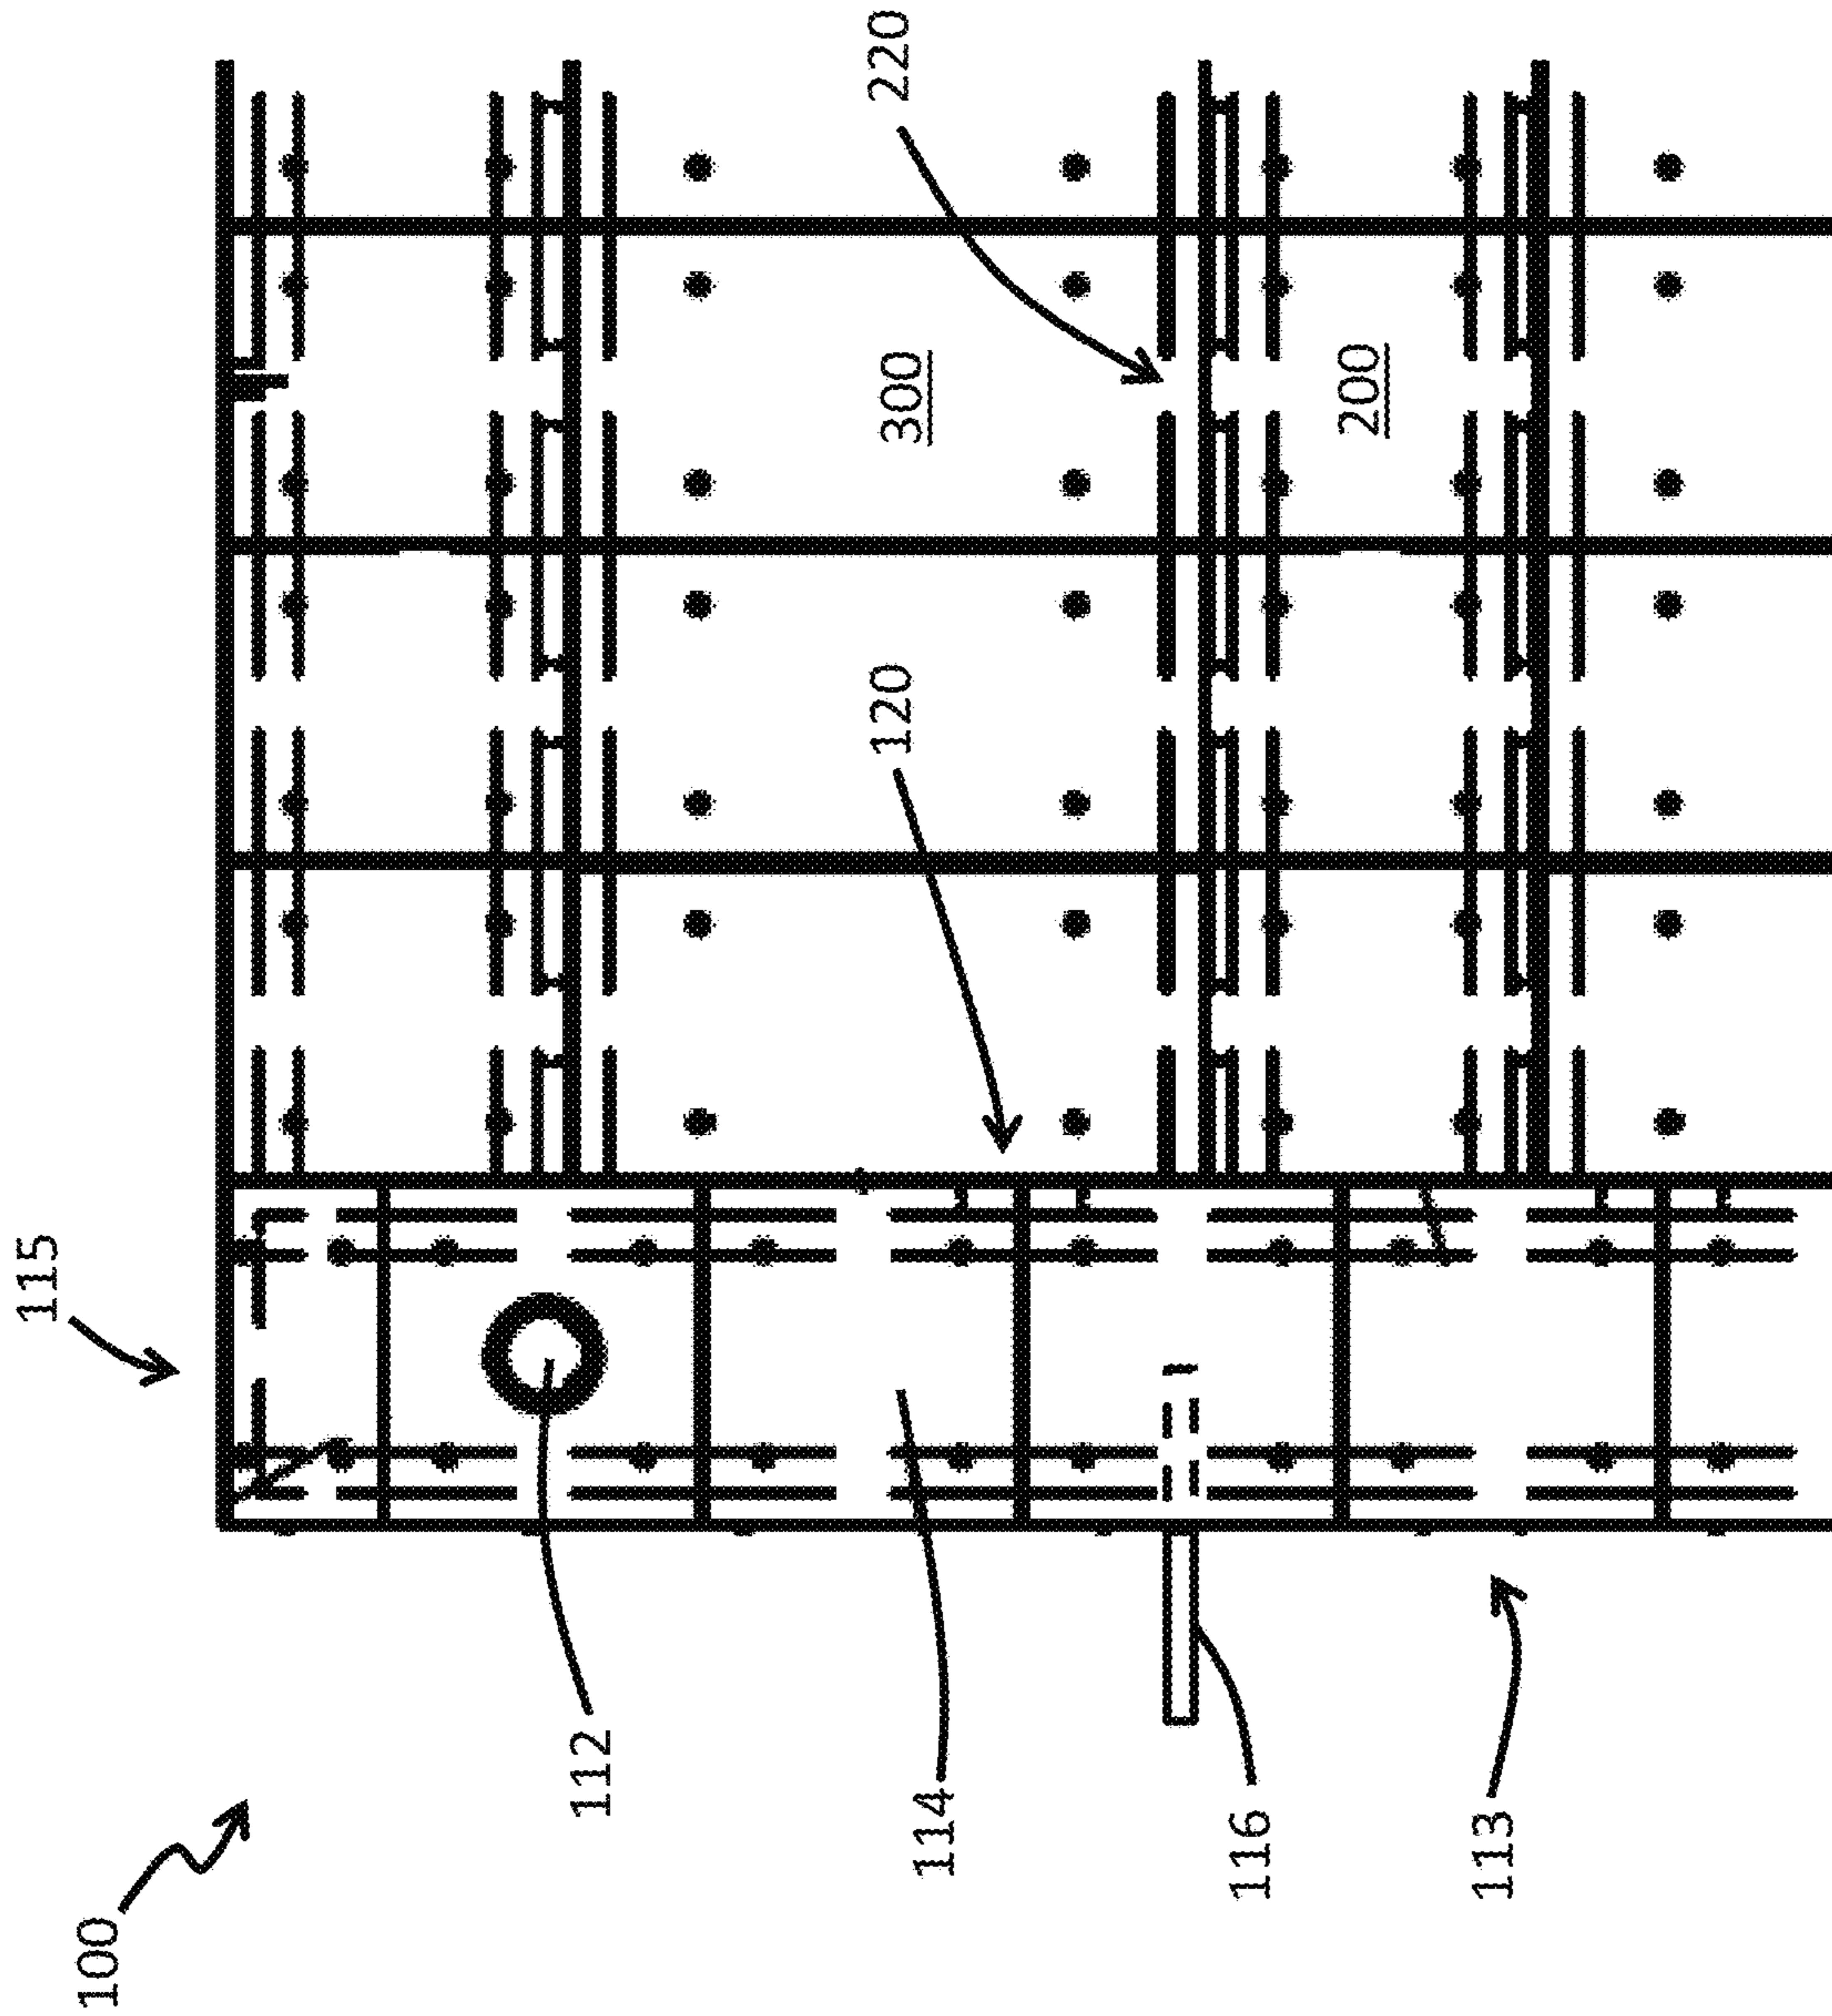


FIG. 25

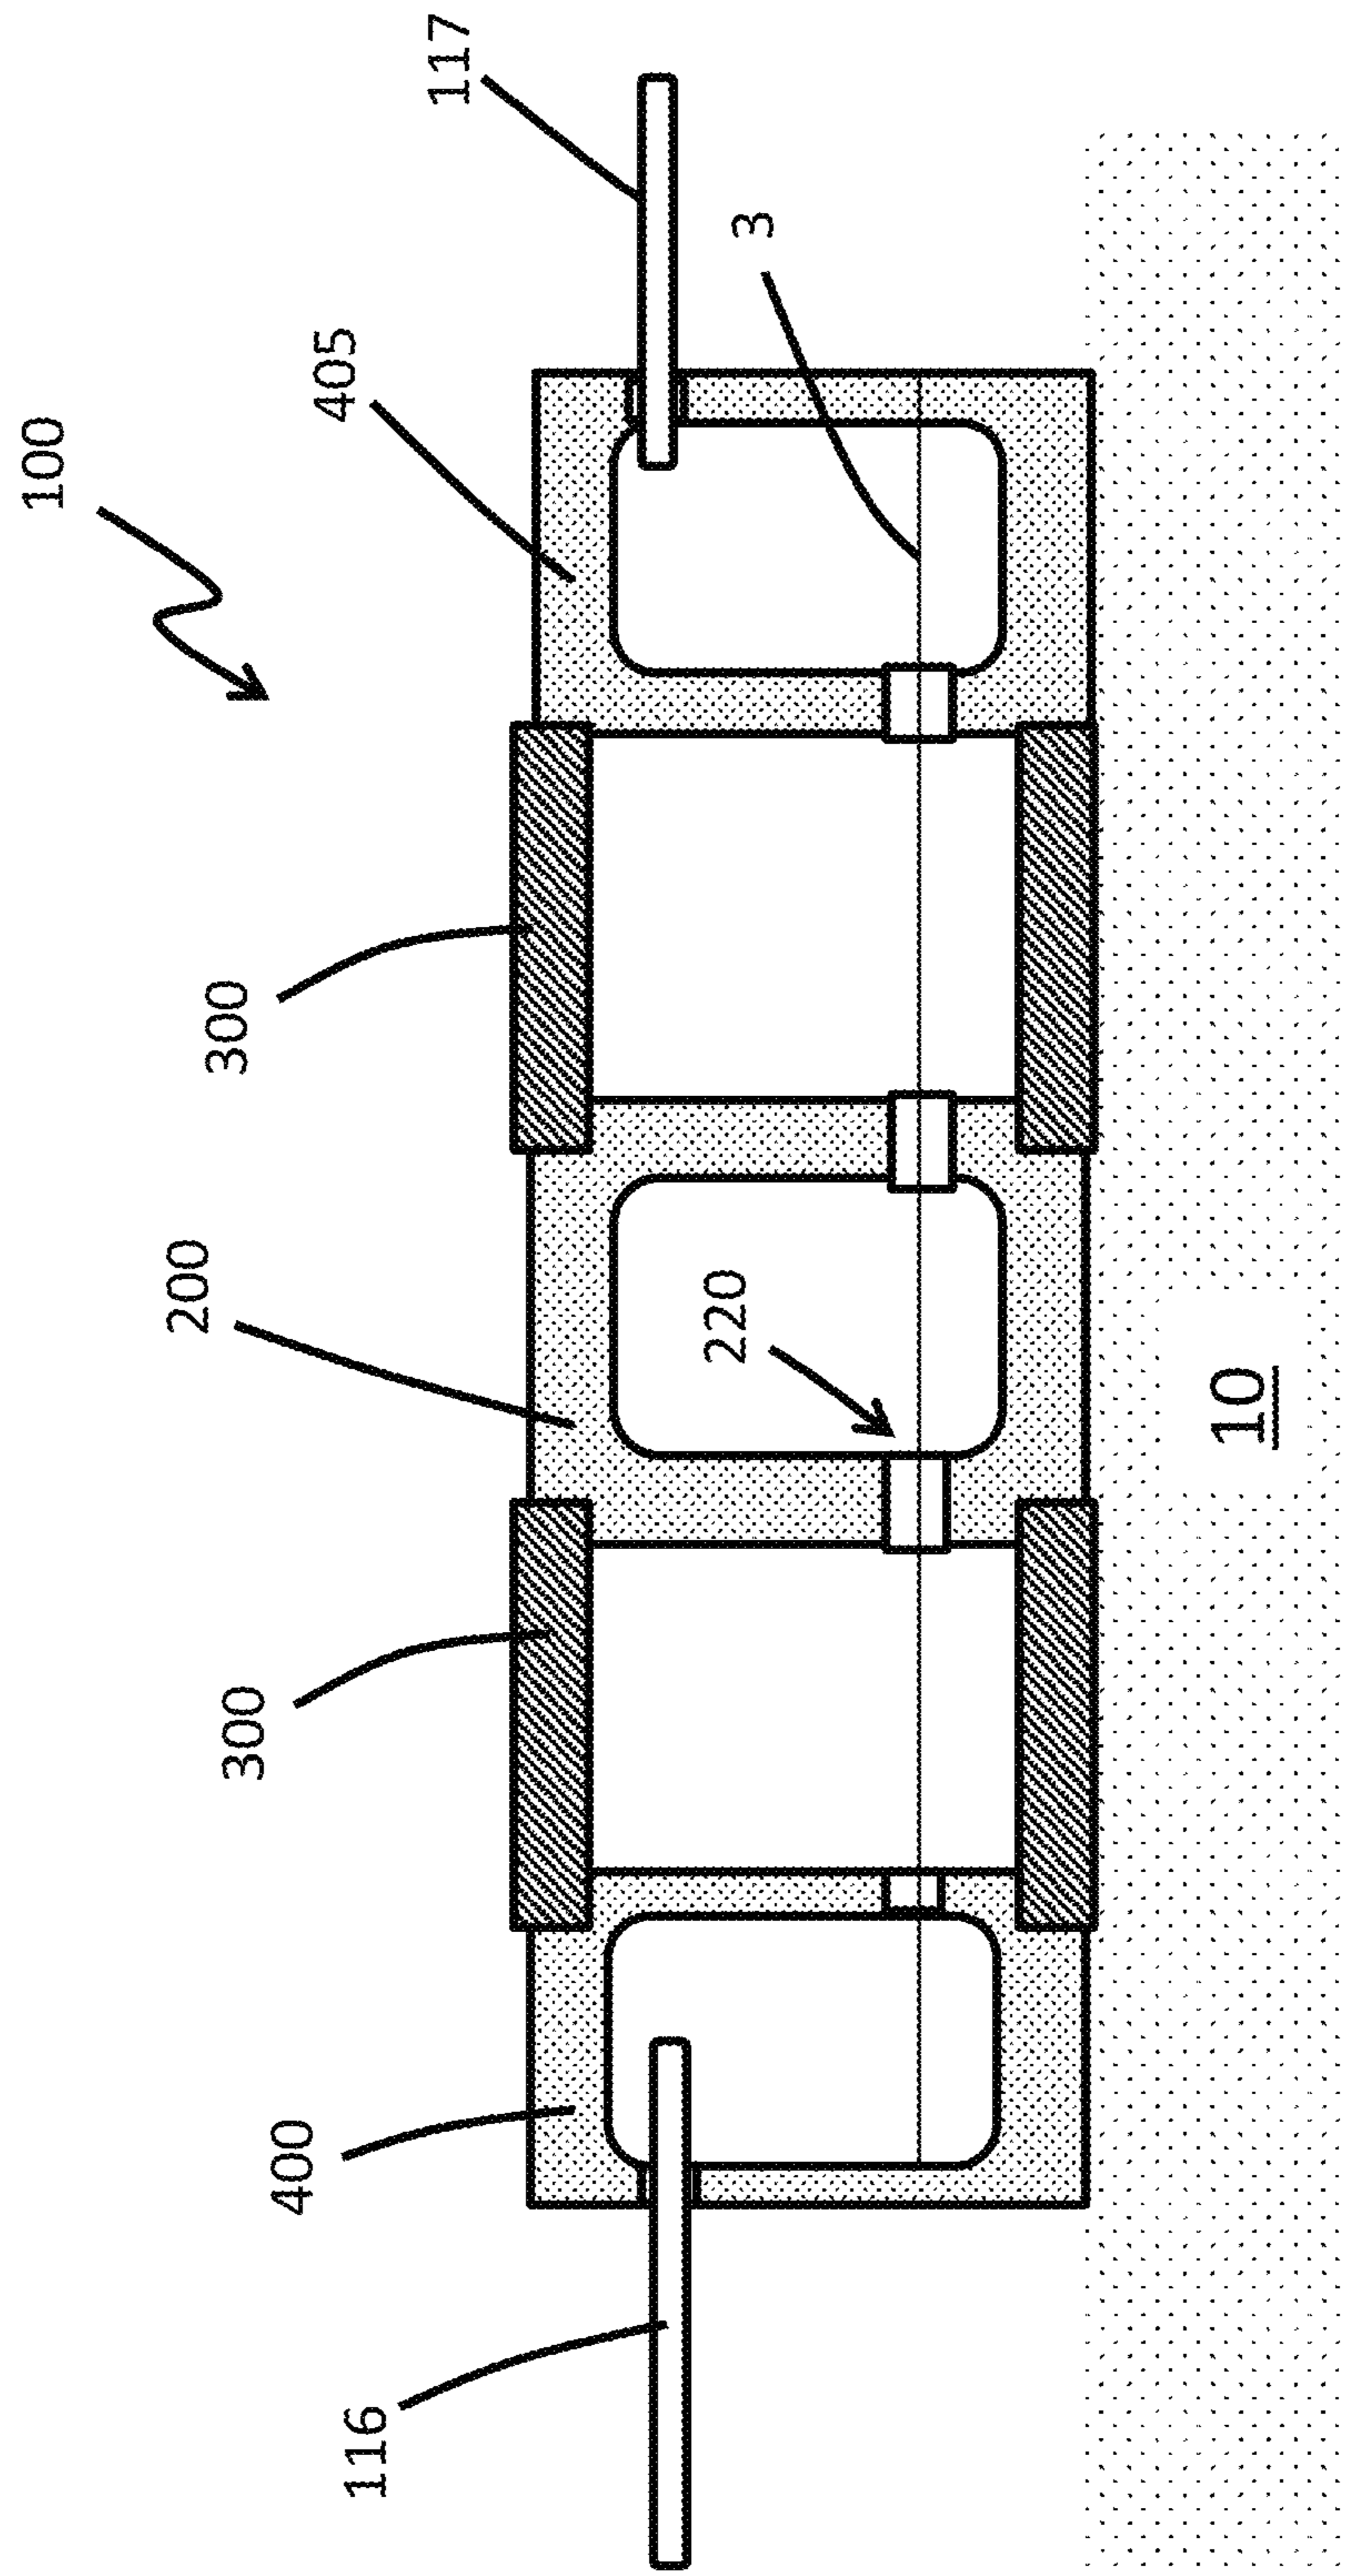


FIG. 26

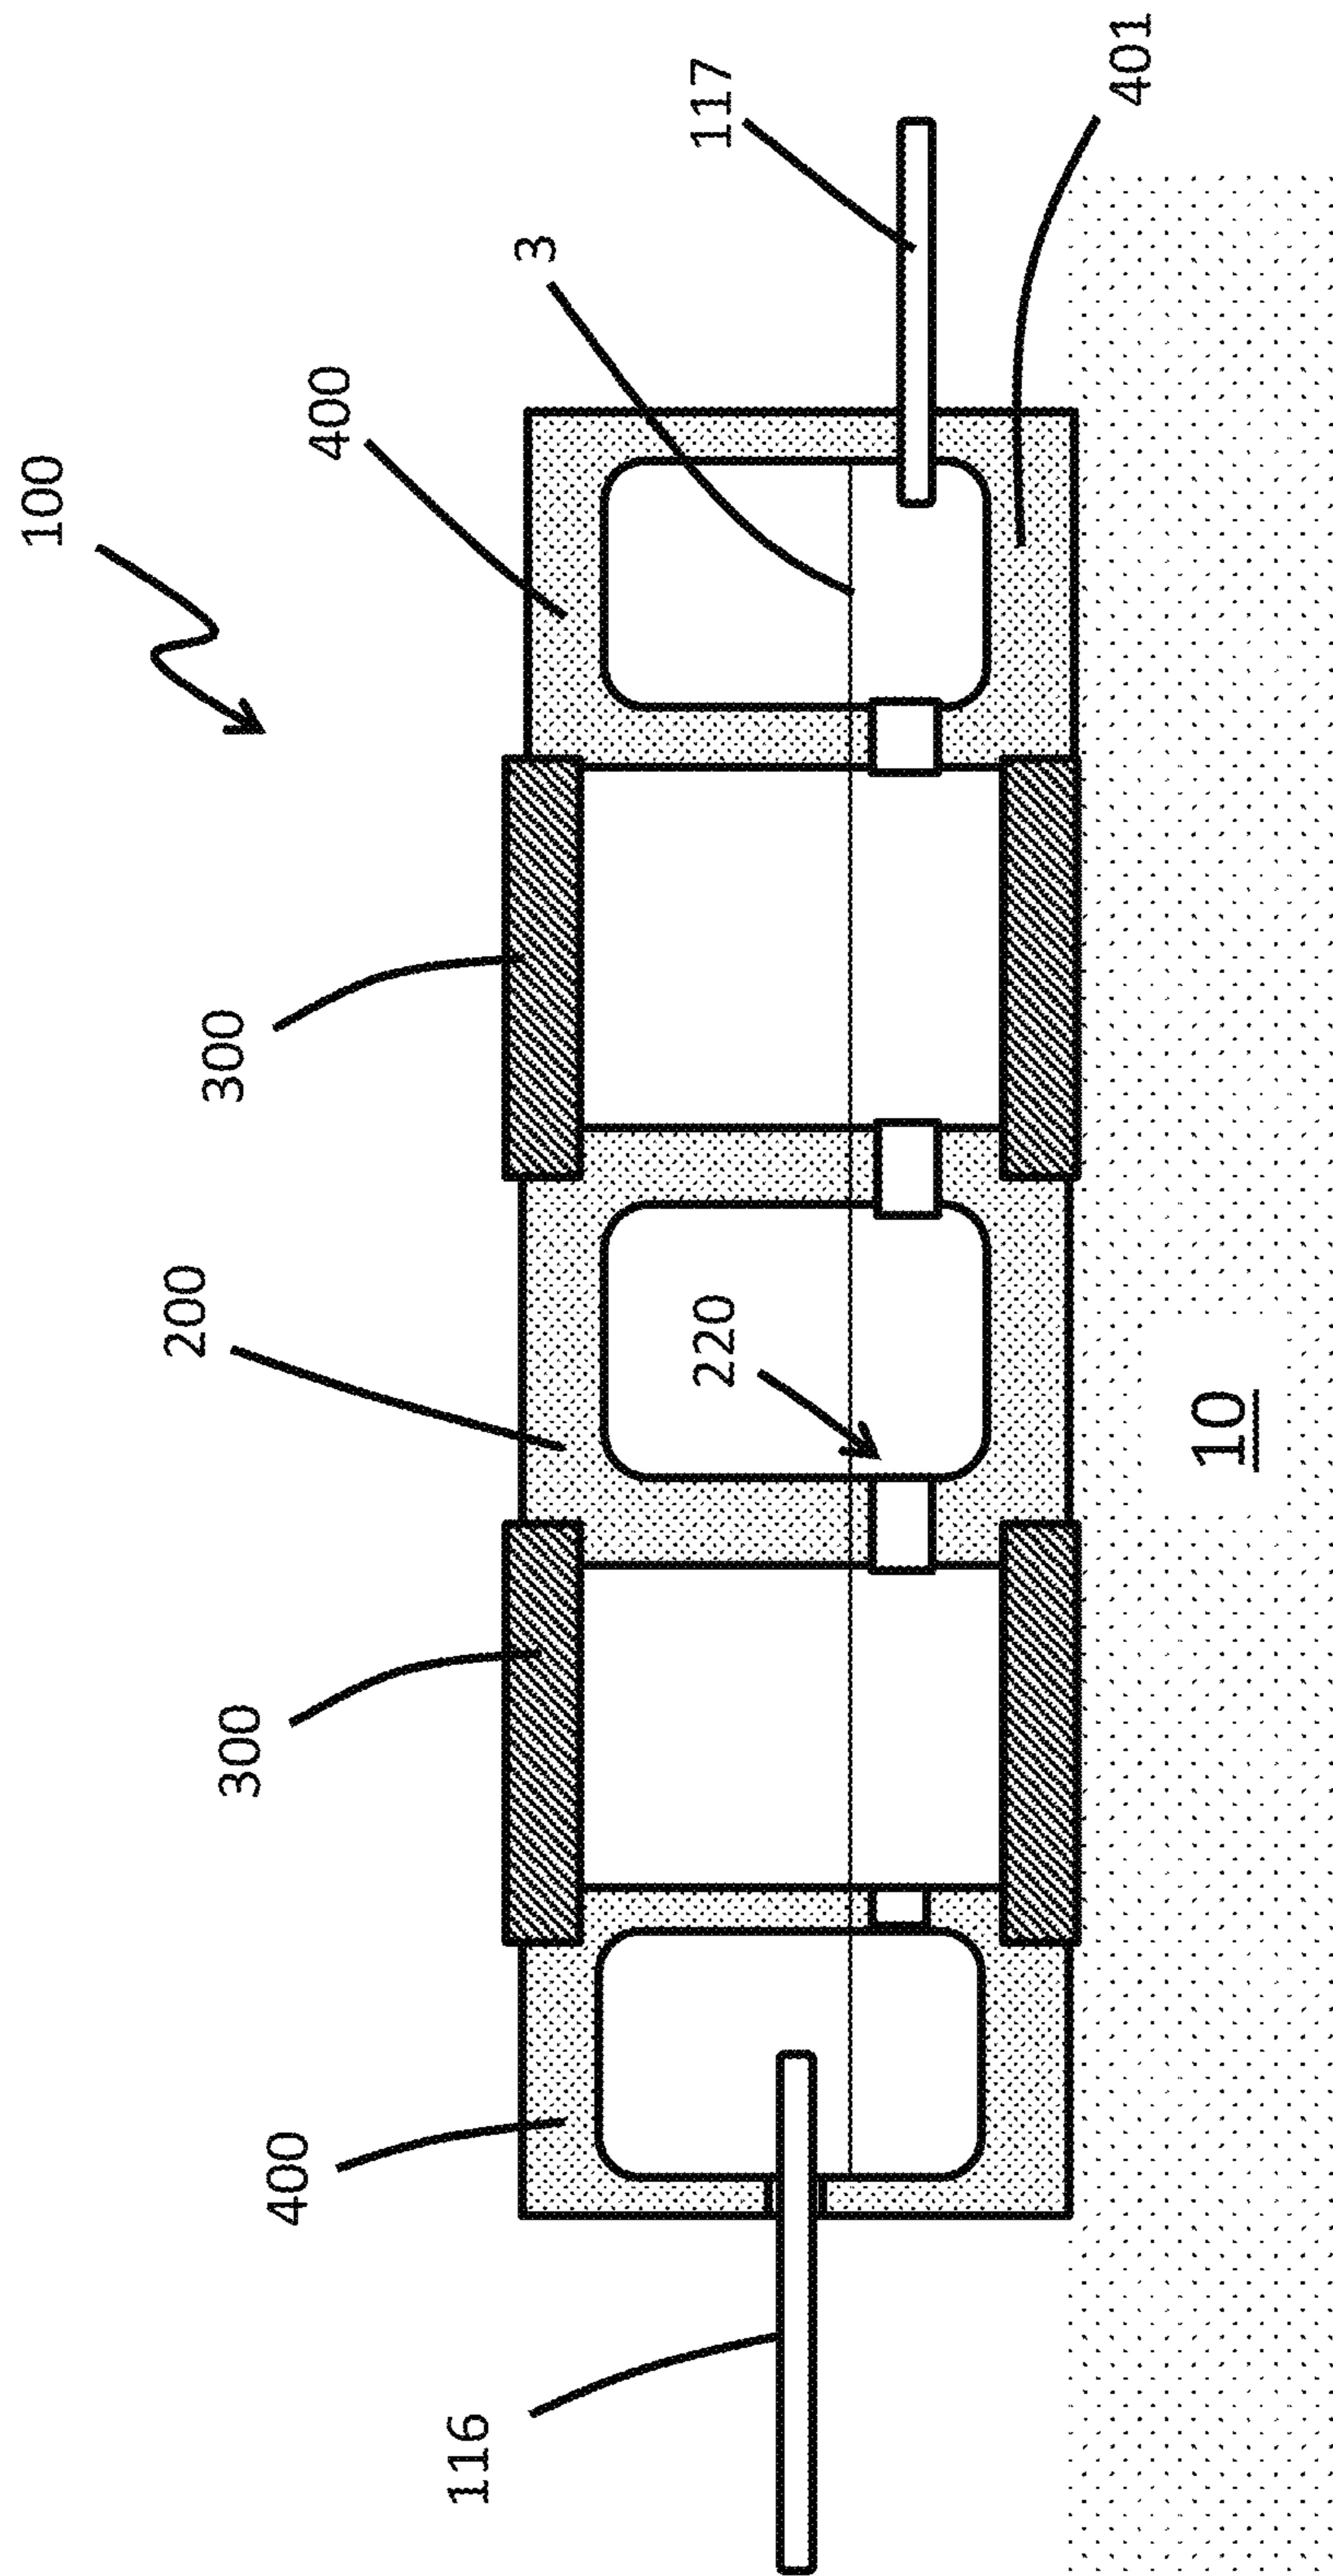


FIG. 27

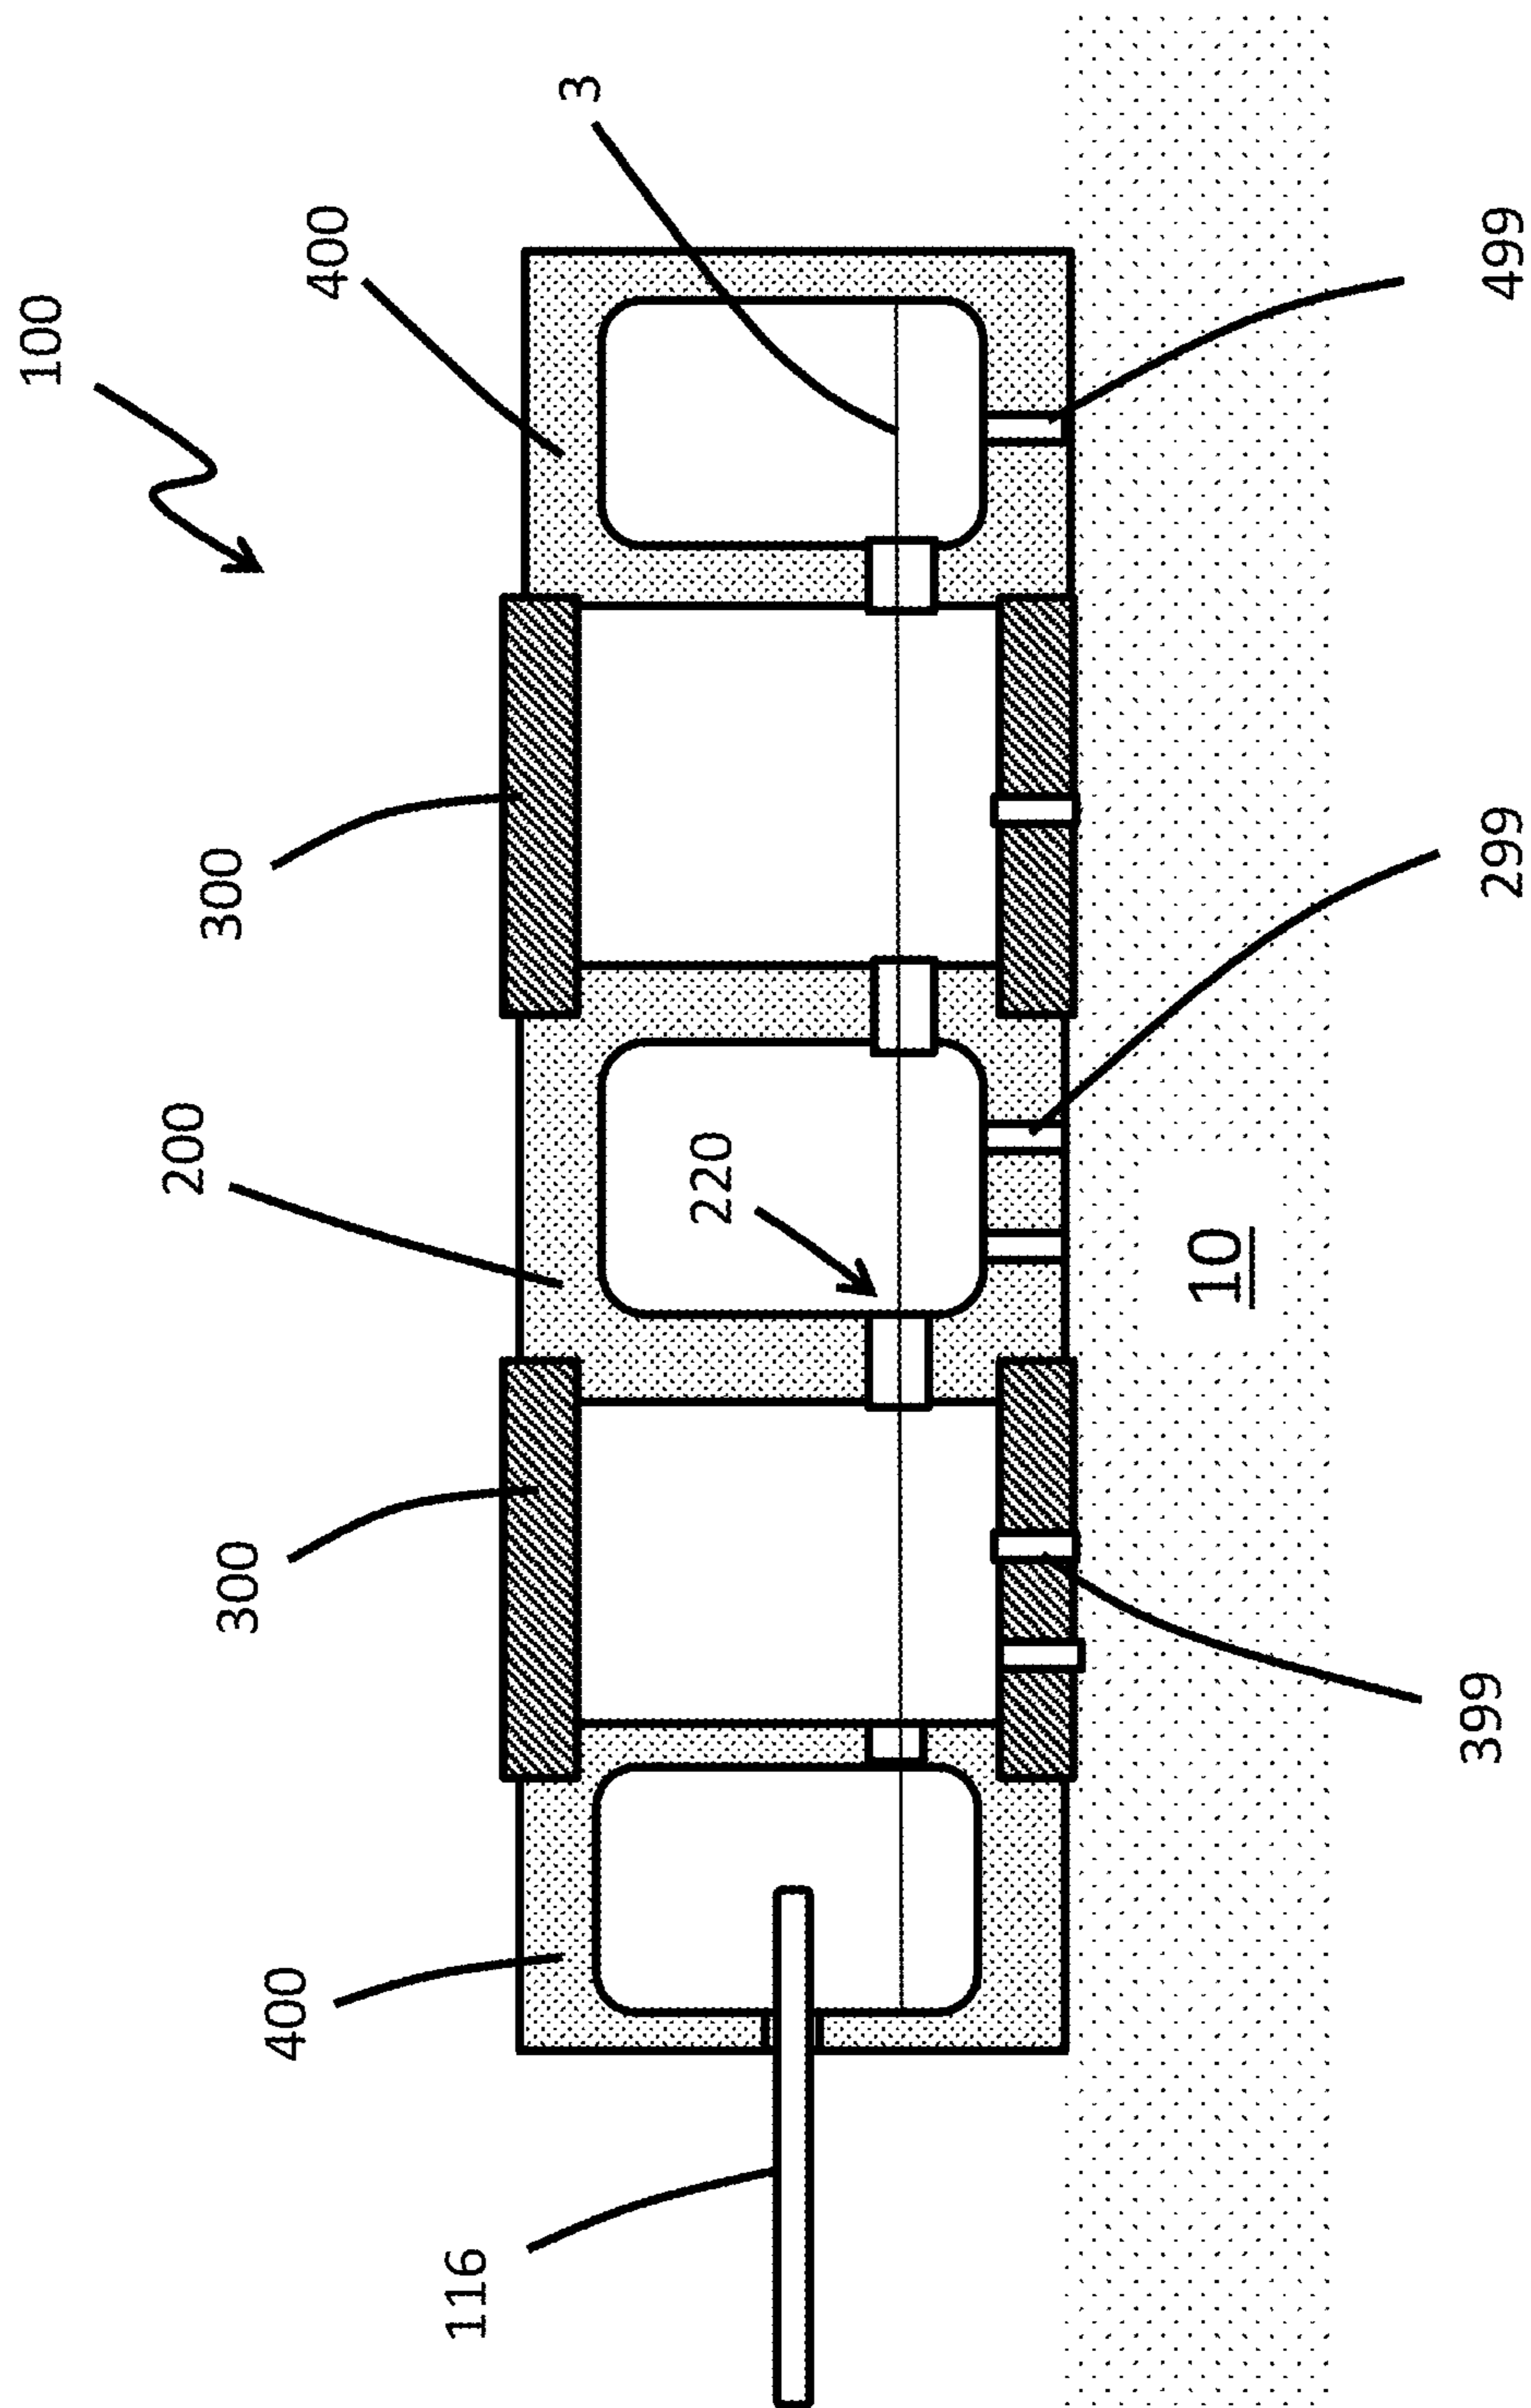


FIG. 28

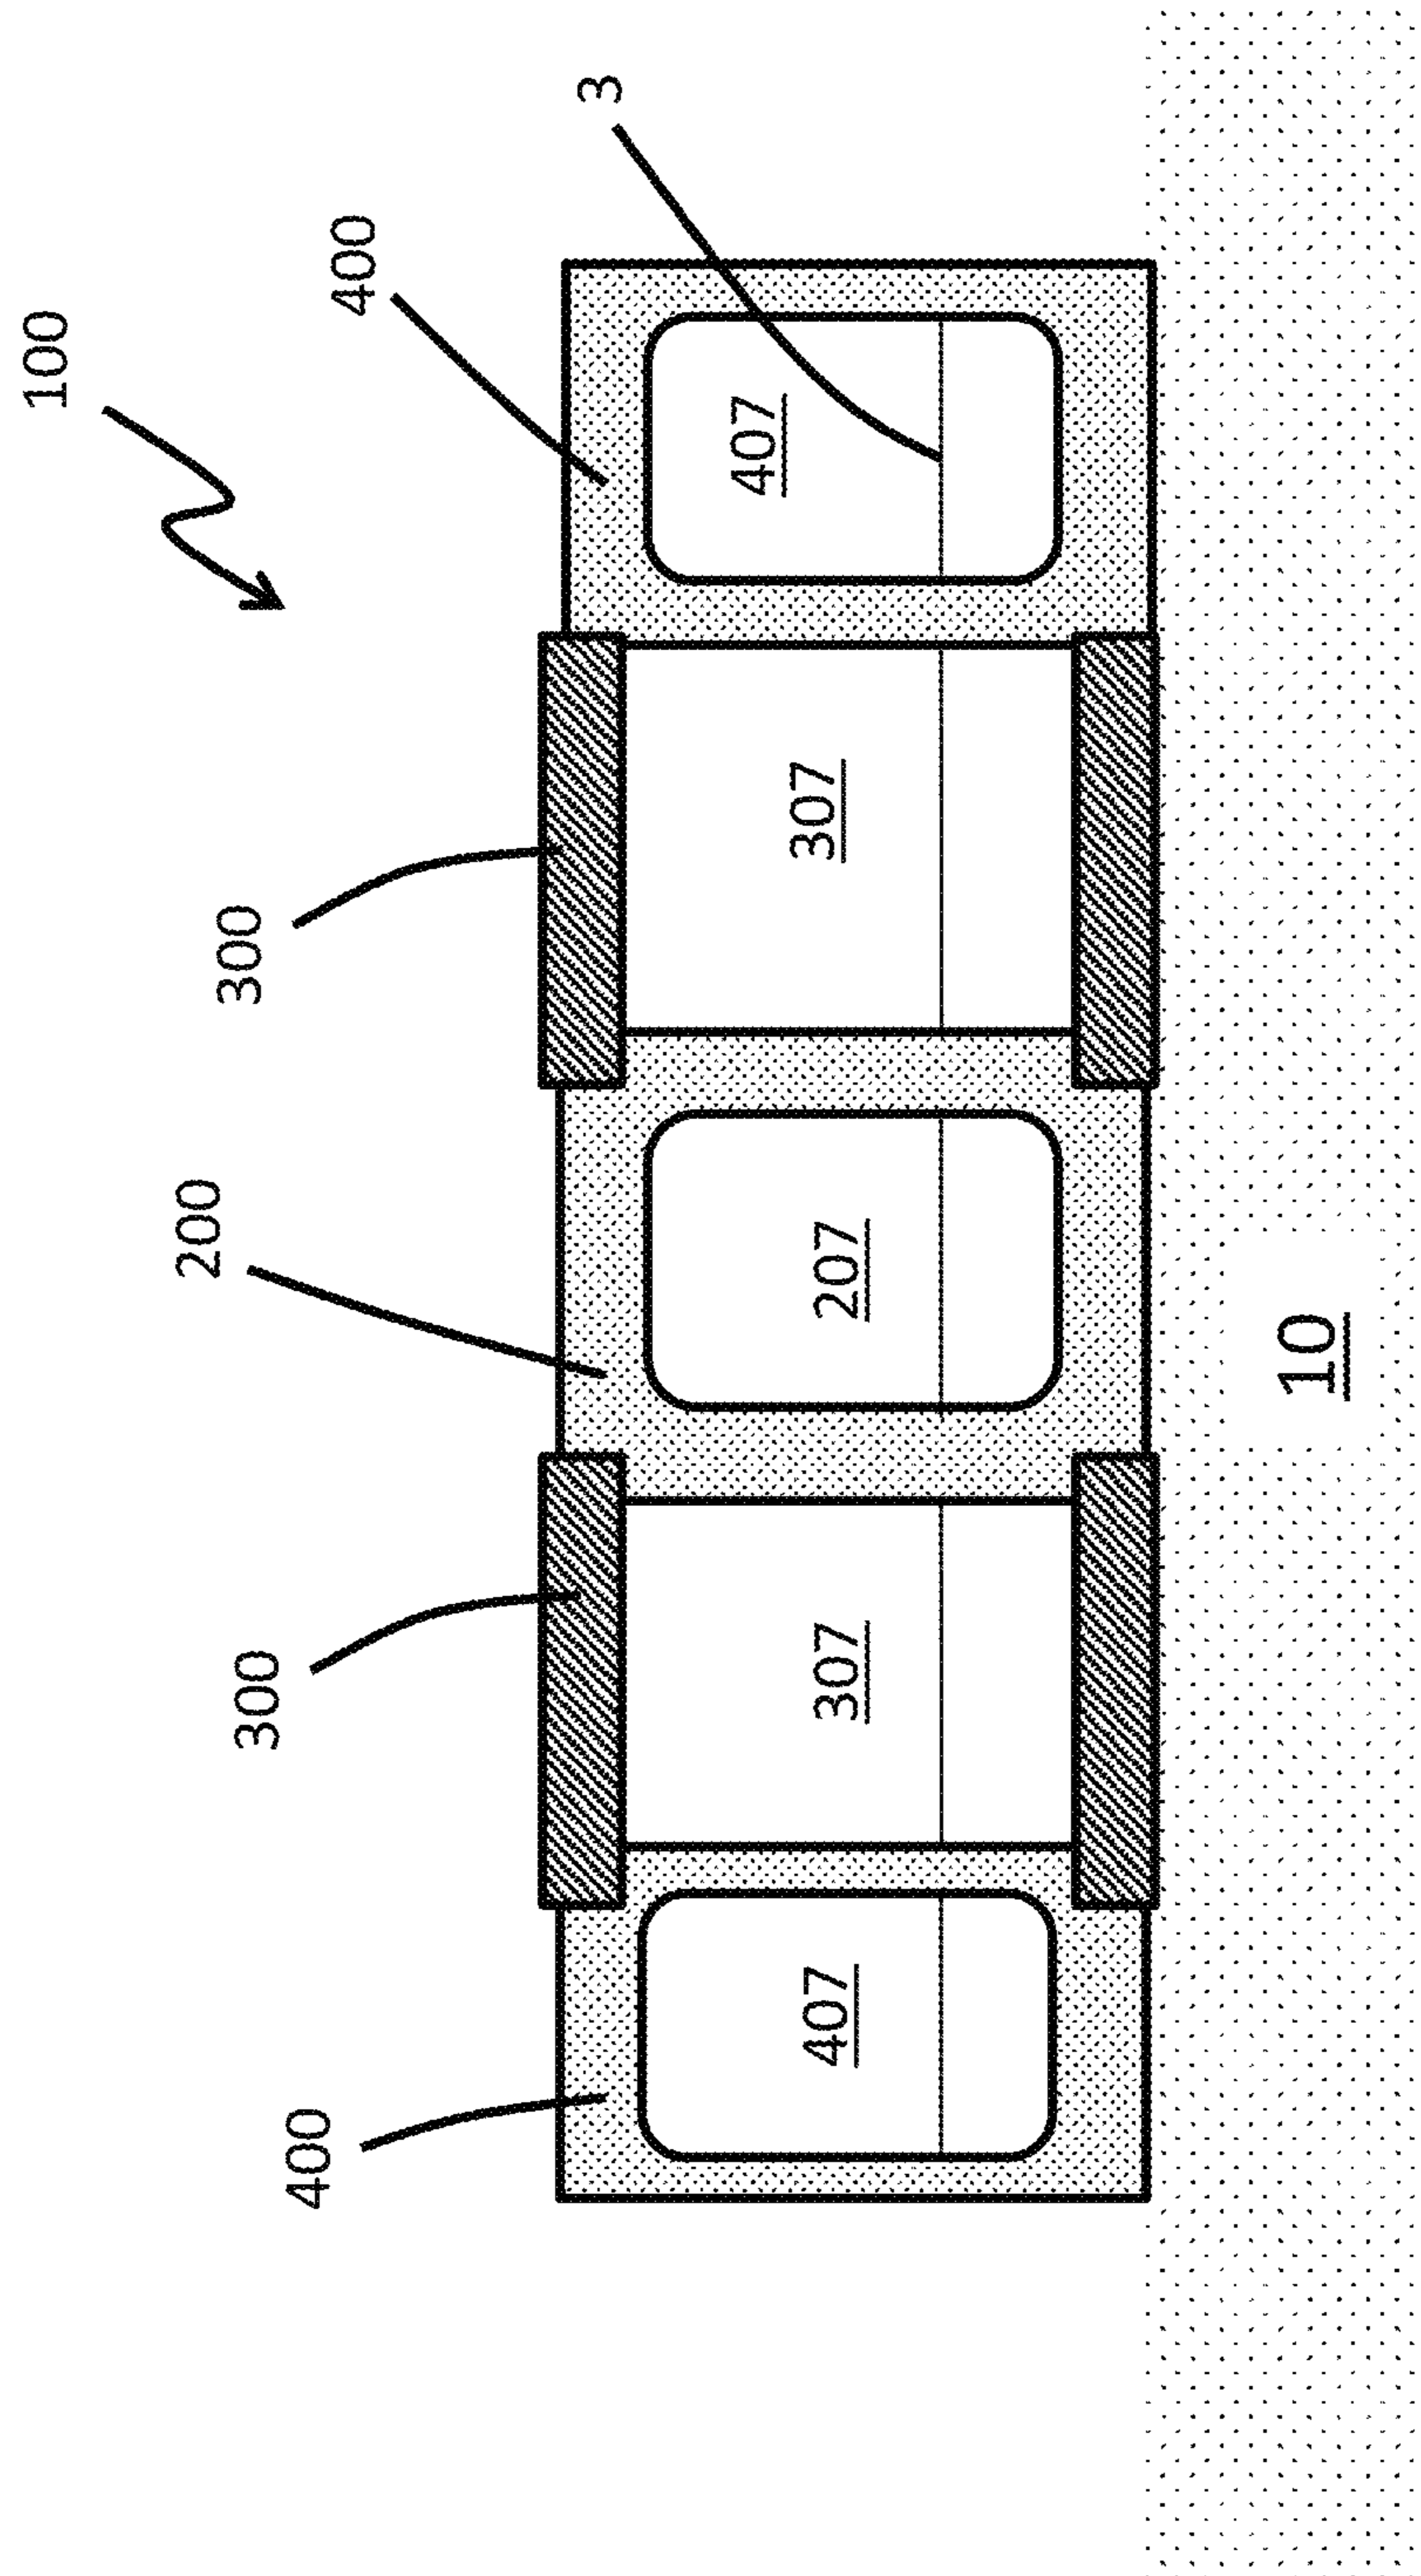


FIG. 29

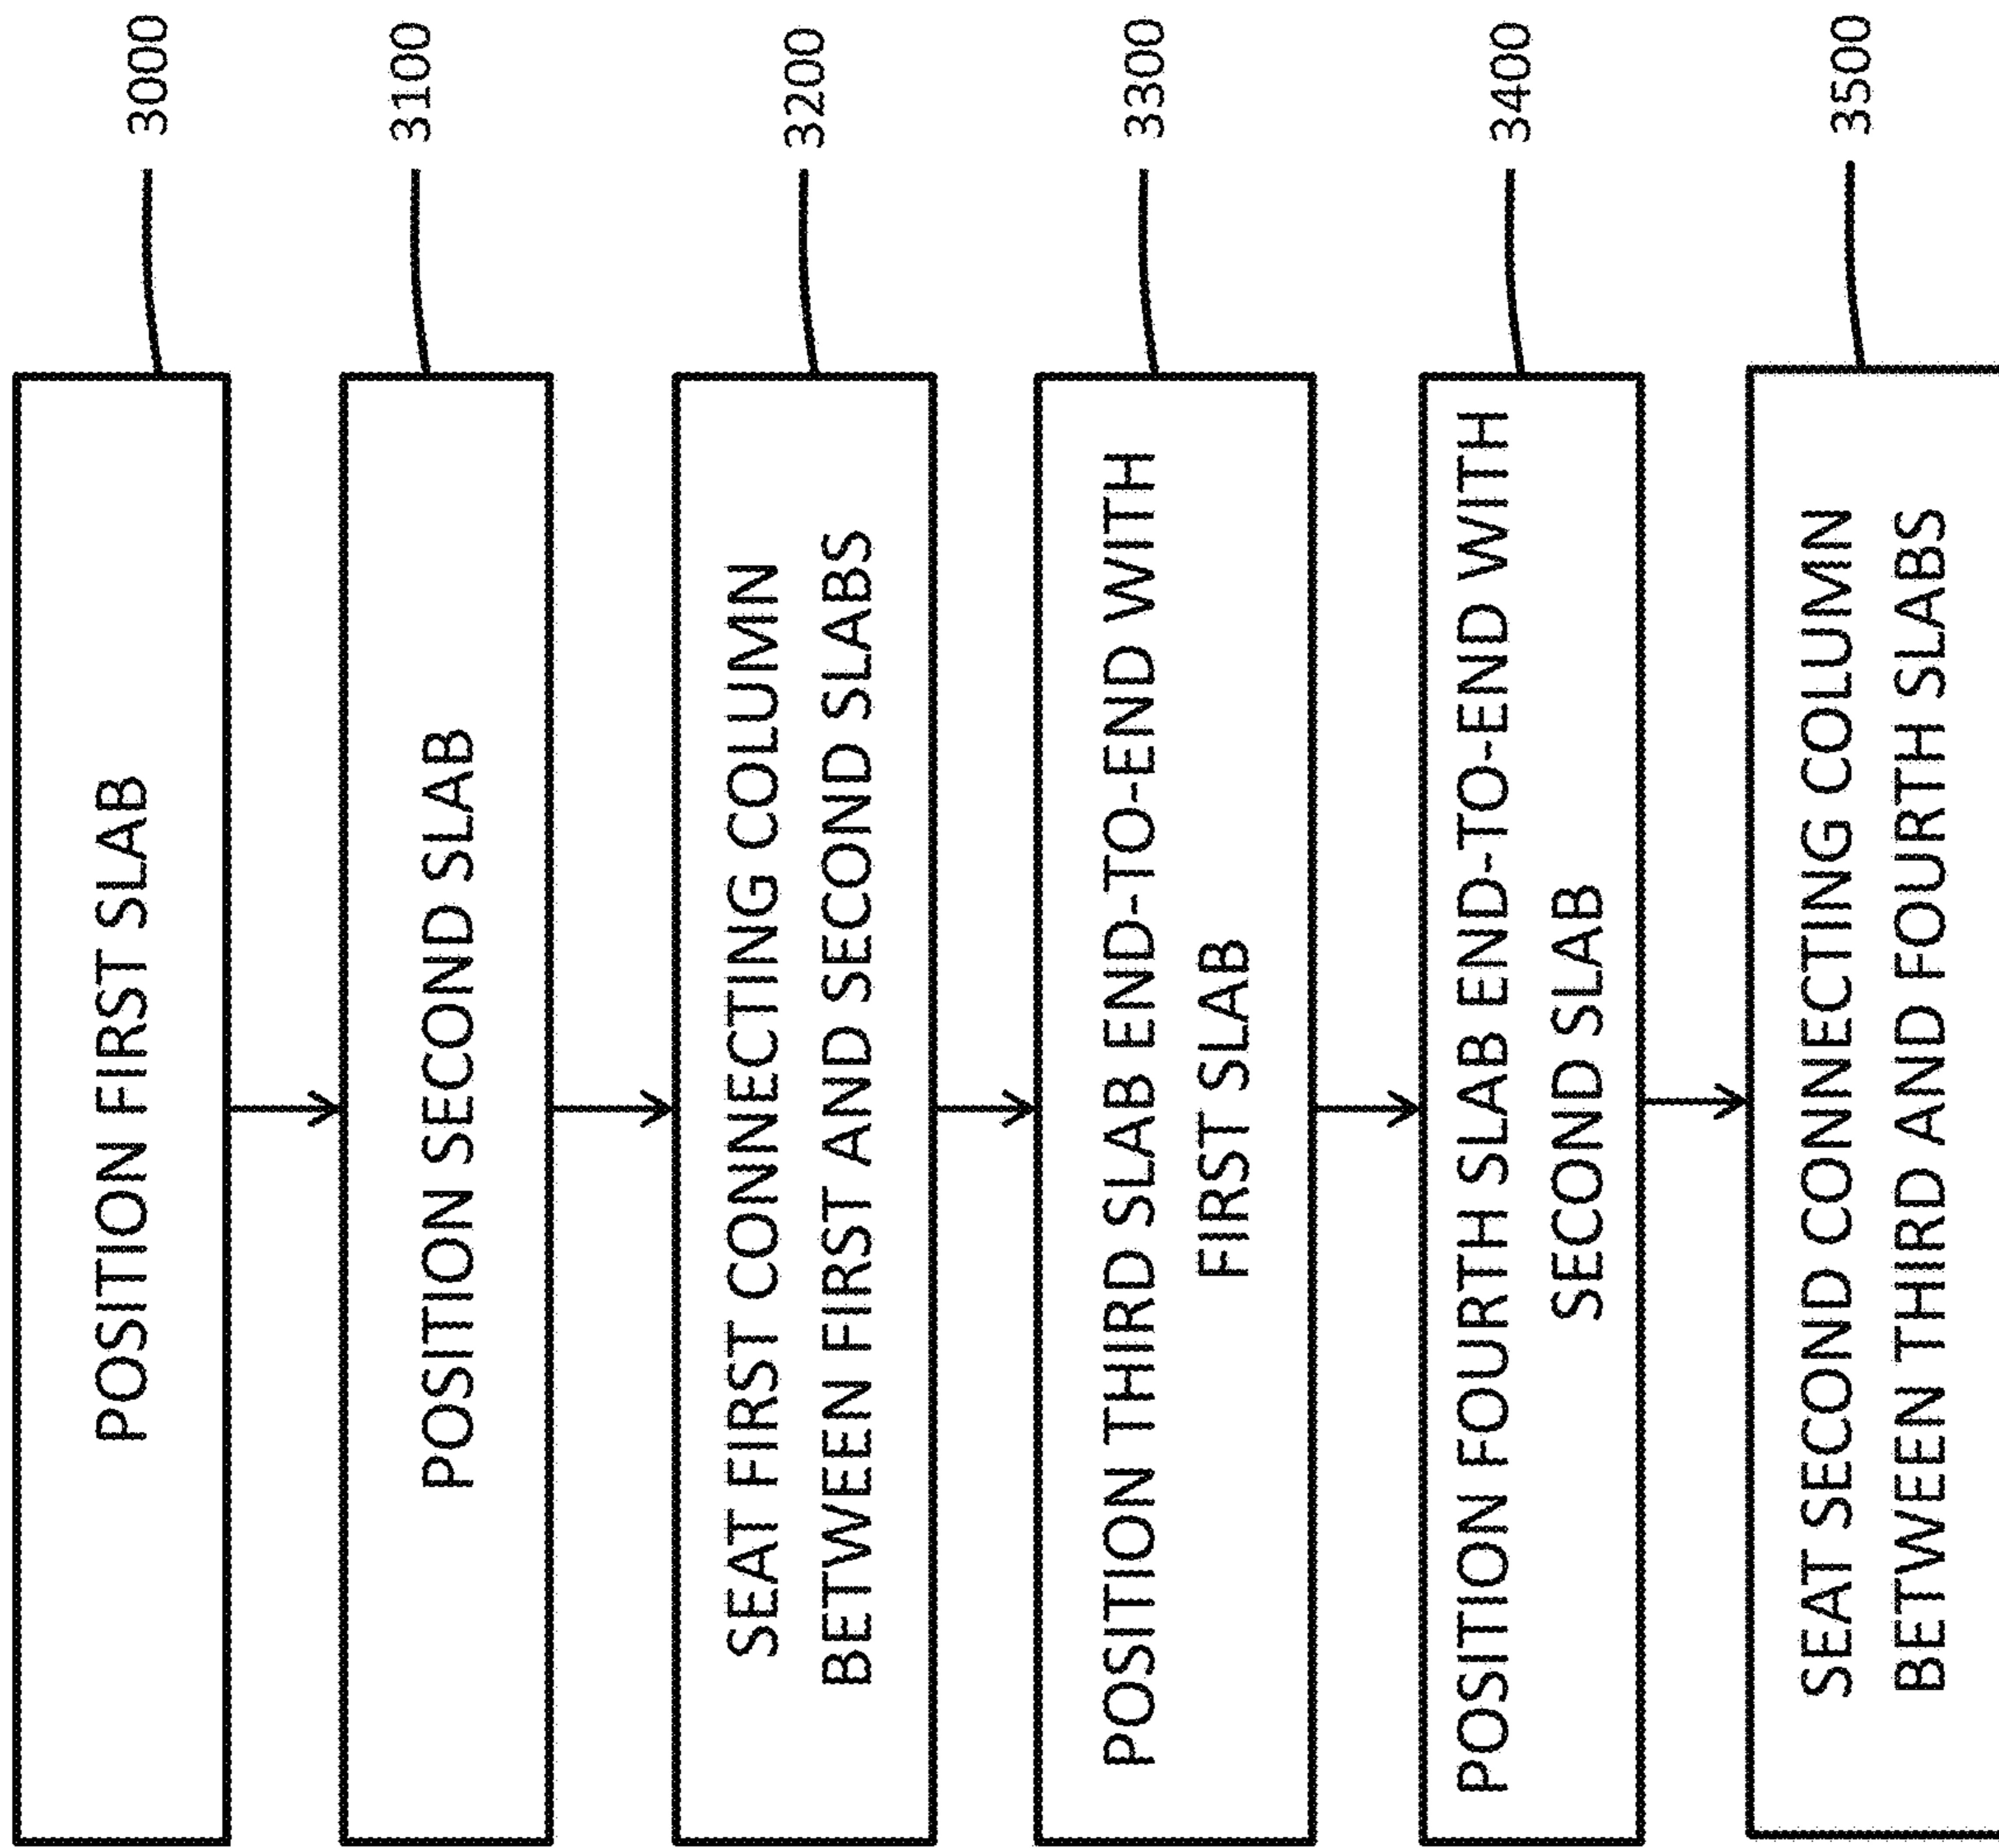


FIG. 30

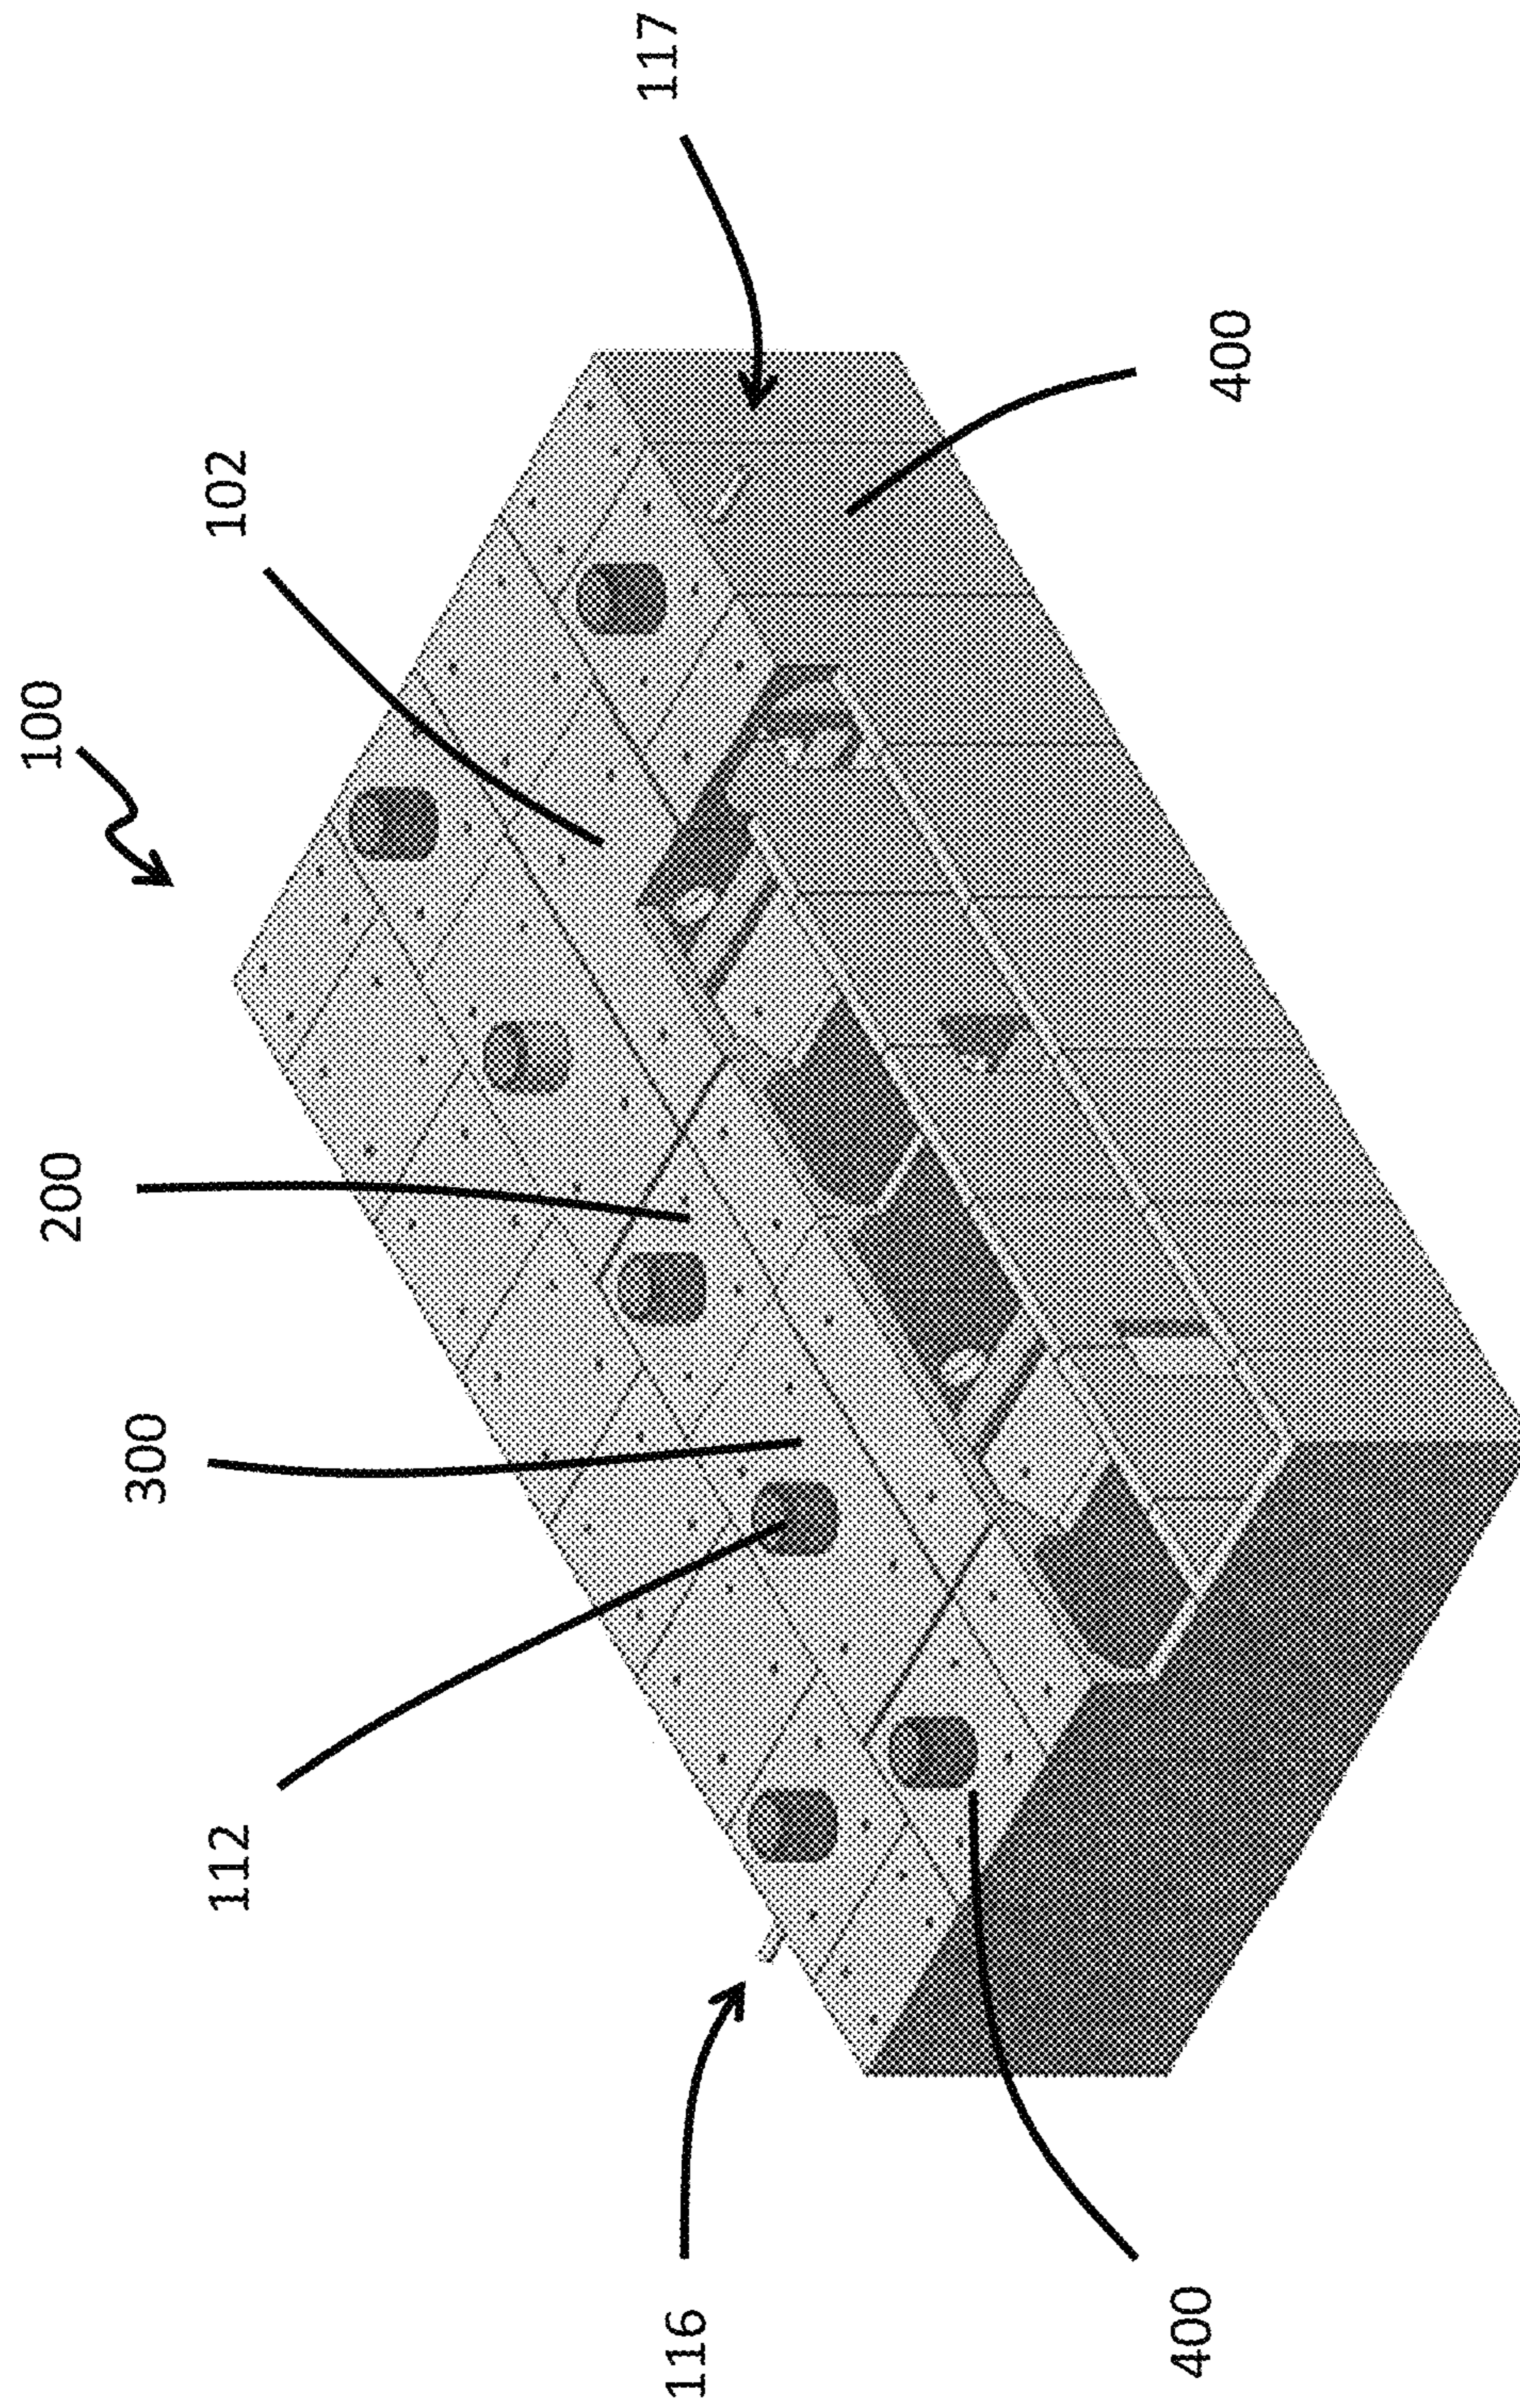


FIG. 31A

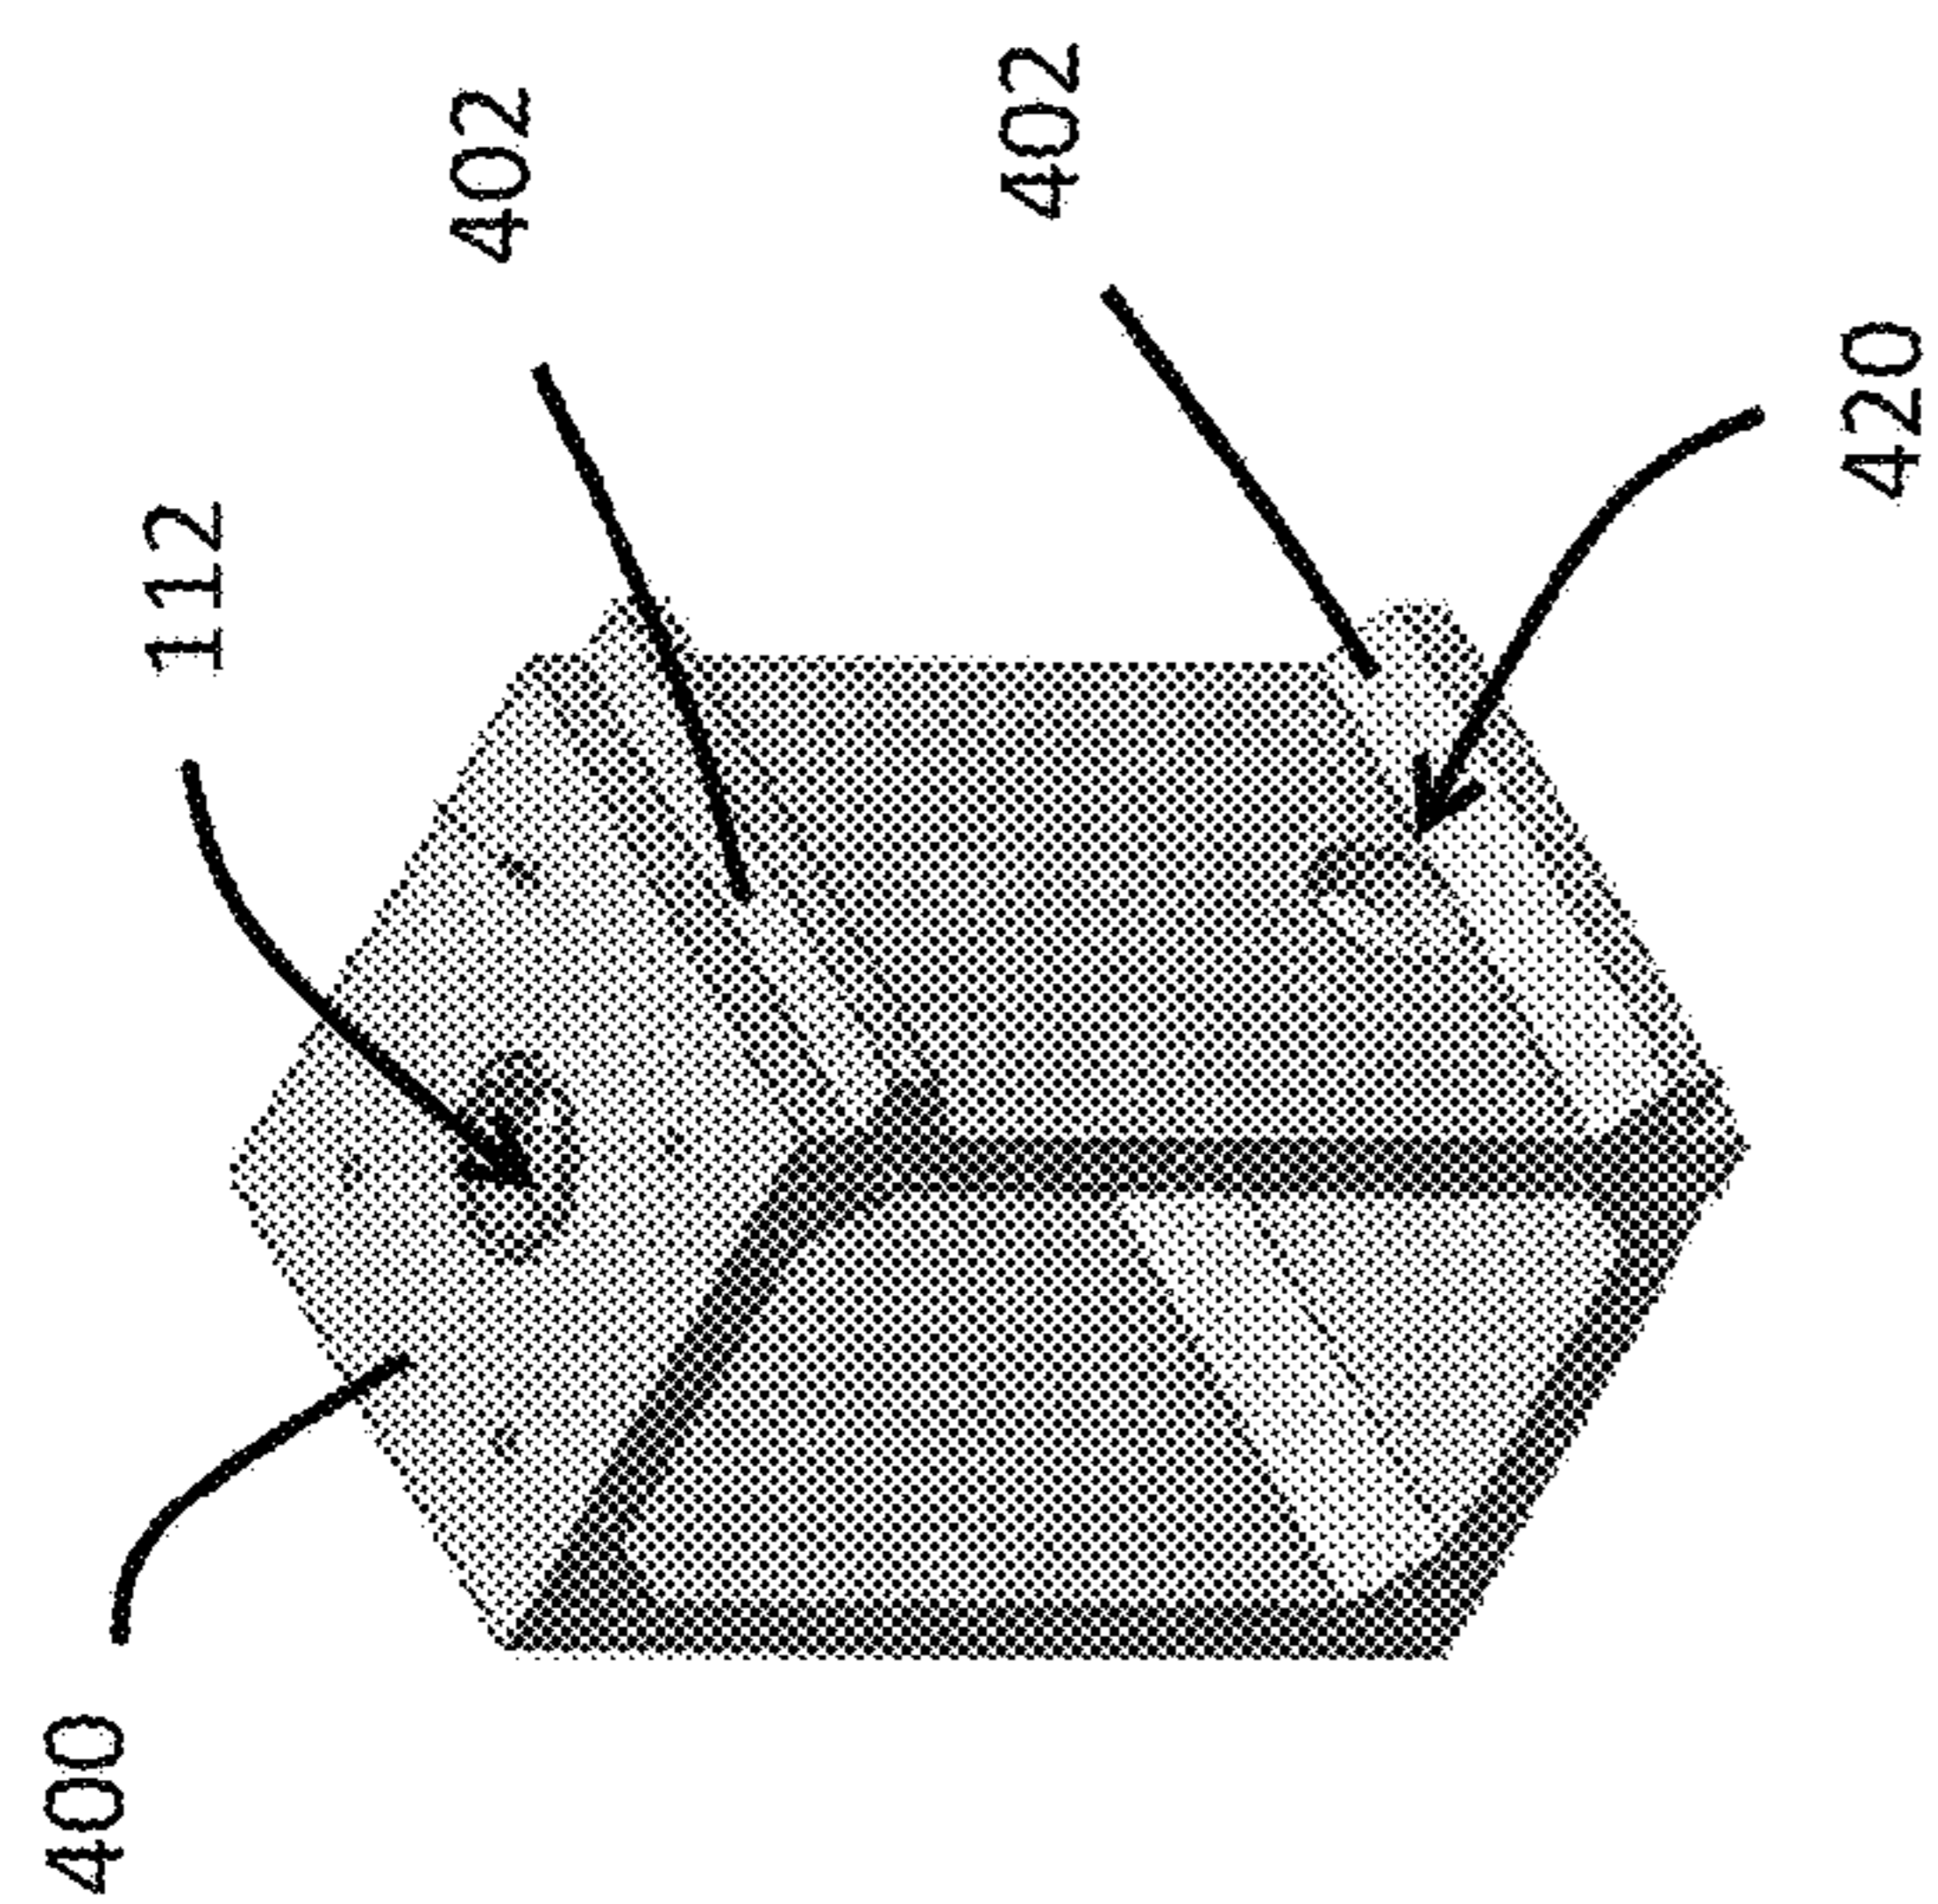


FIG. 31C

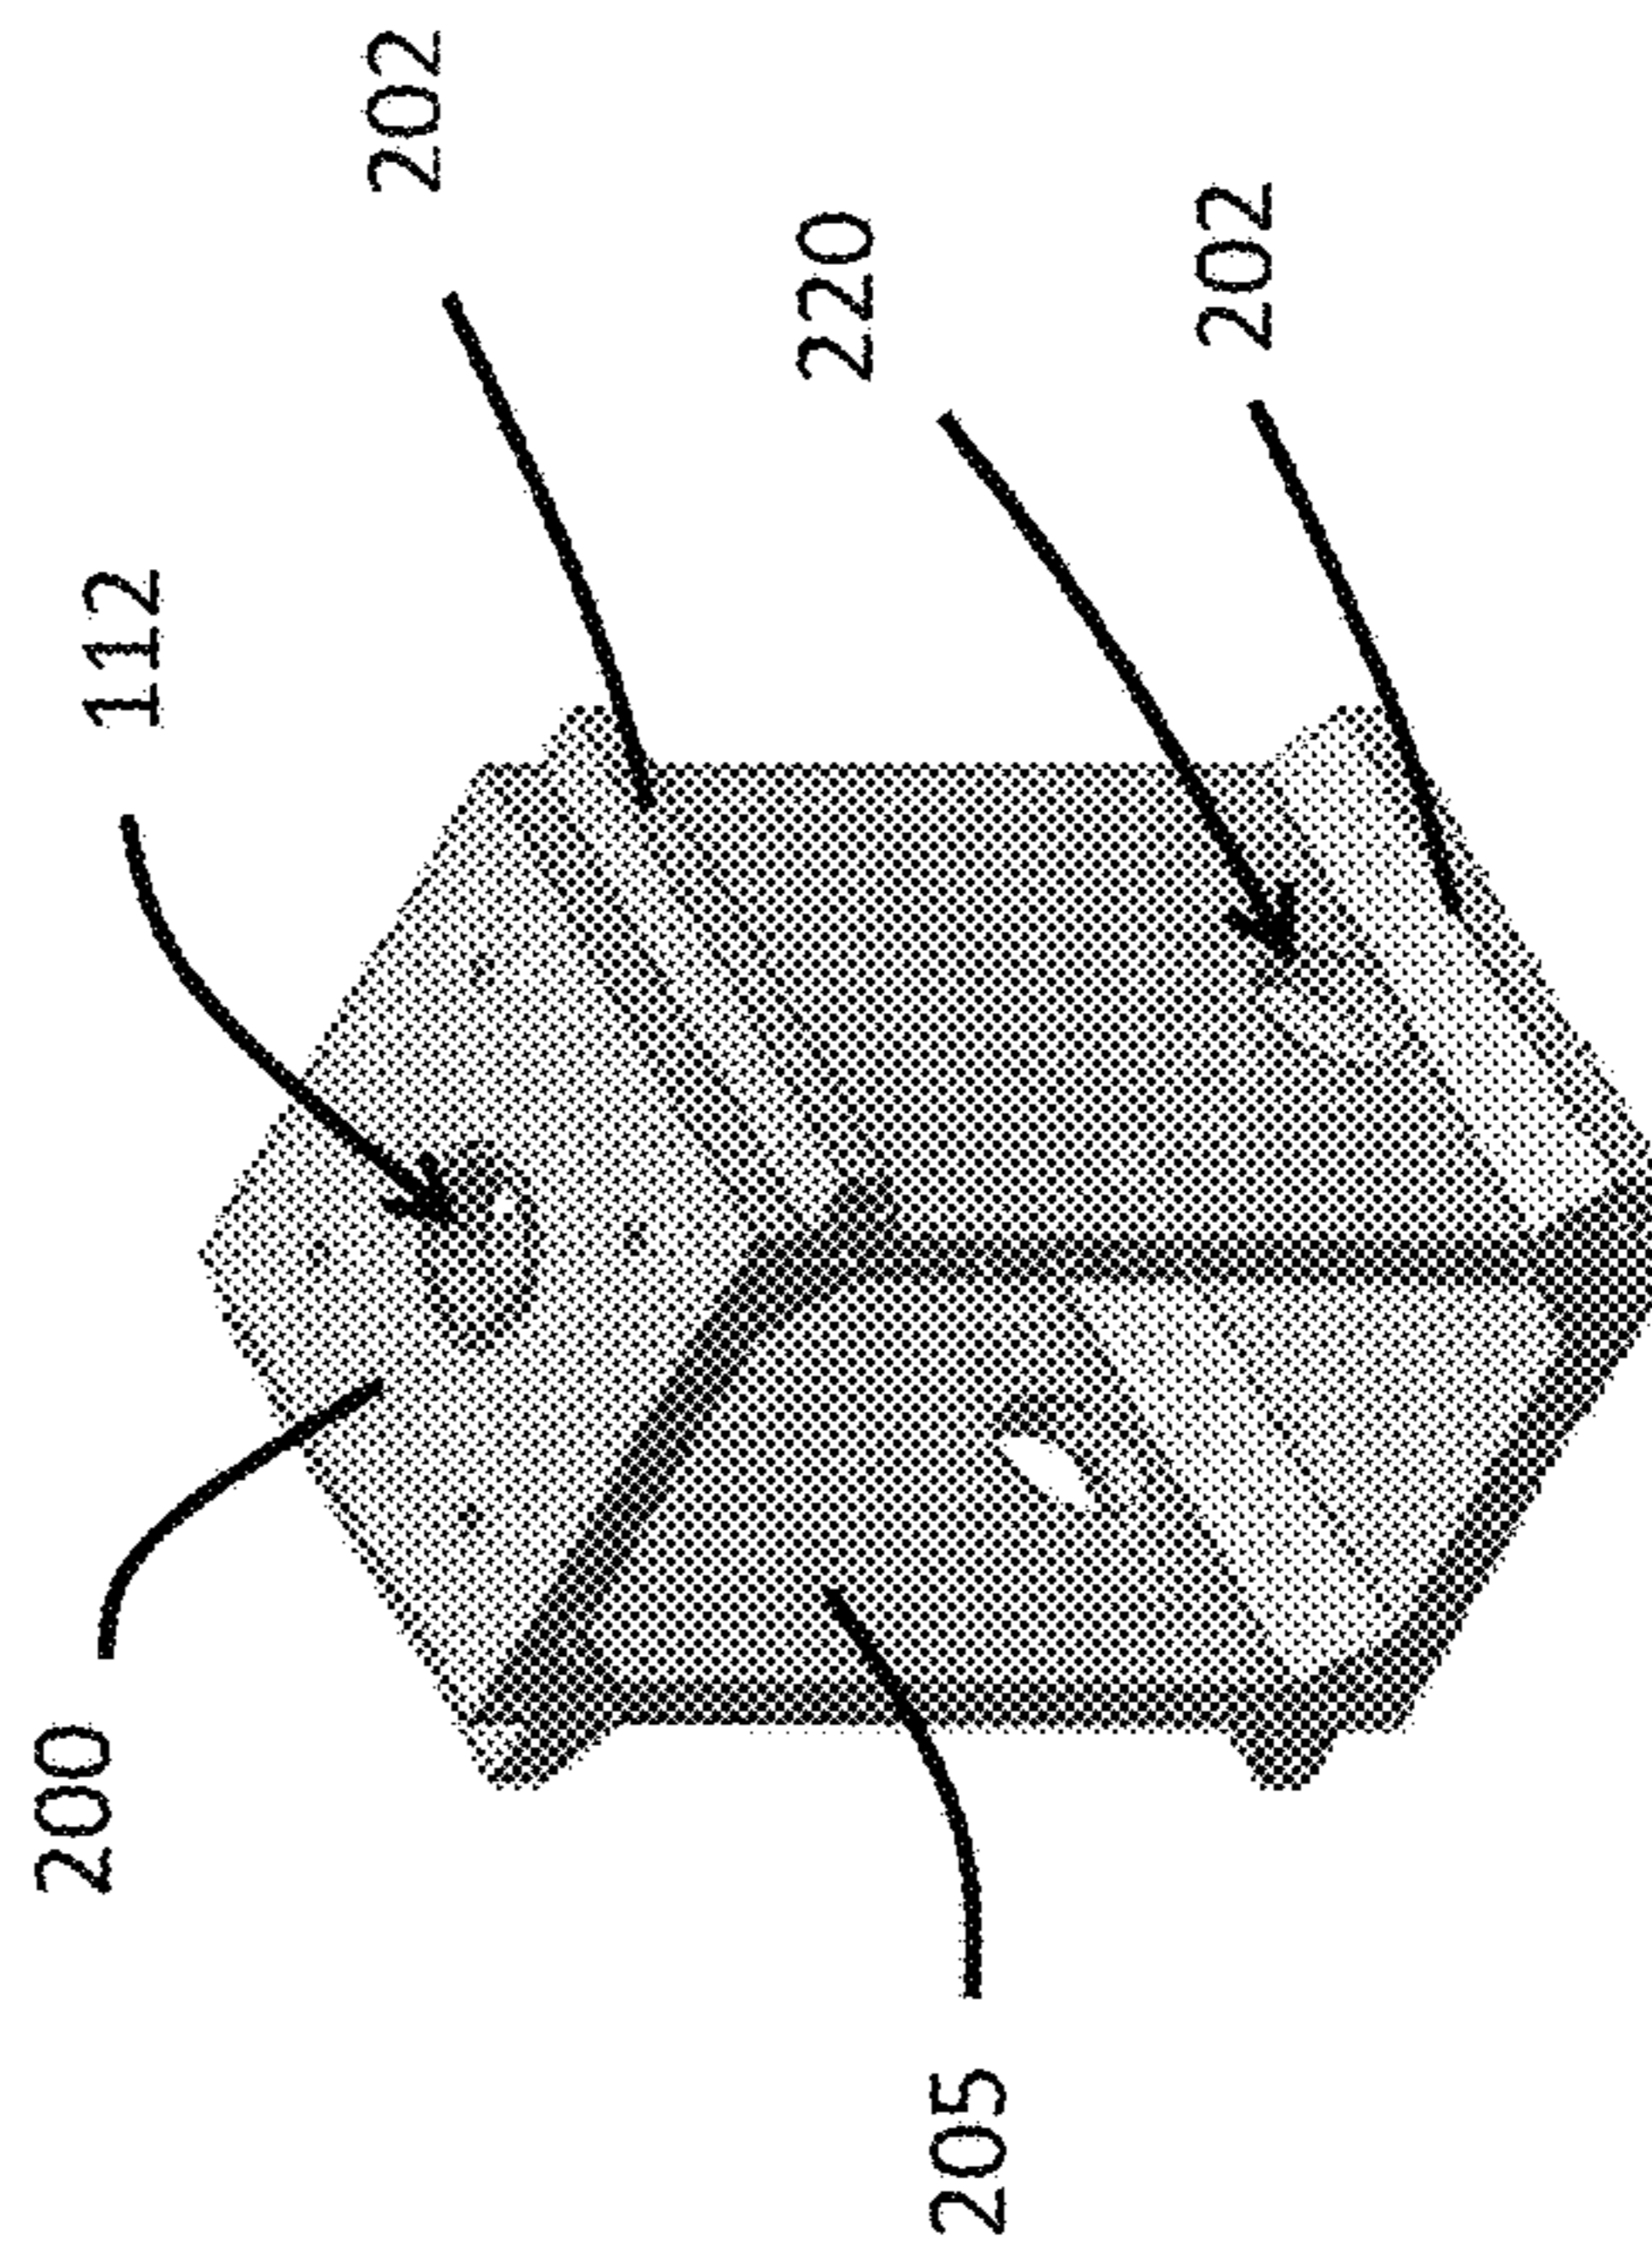


FIG. 31E

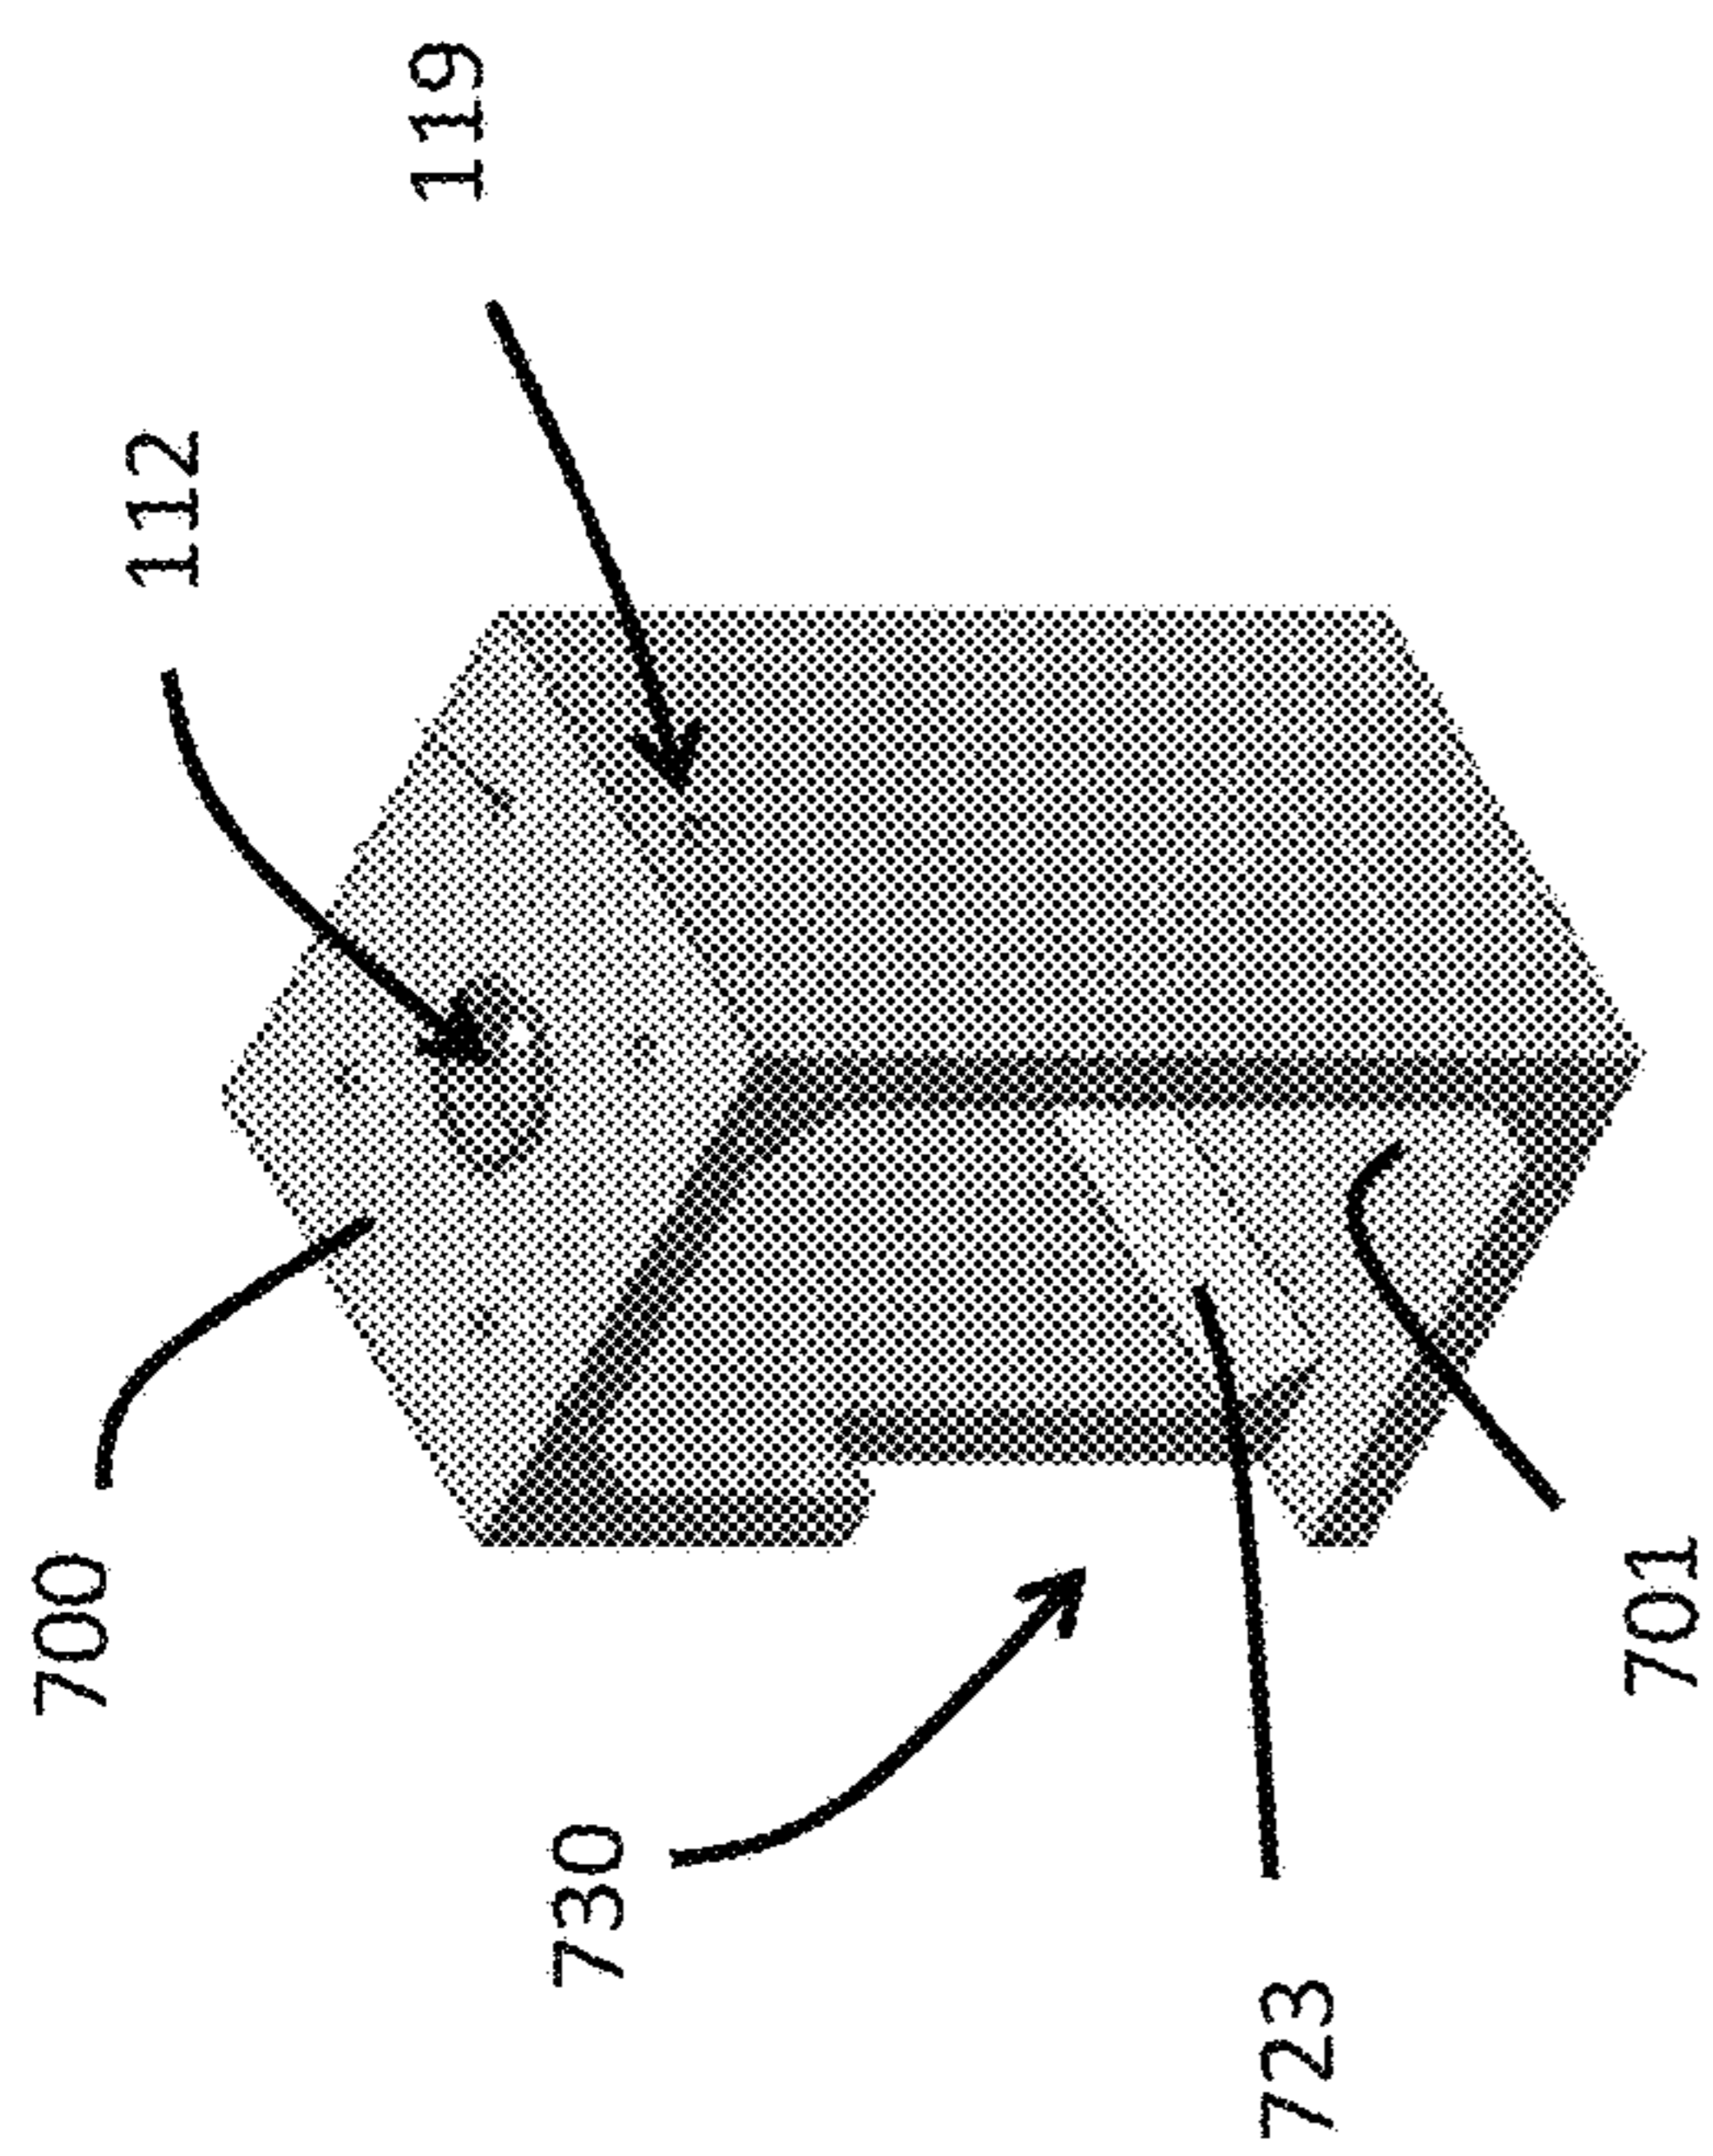


FIG. 31B

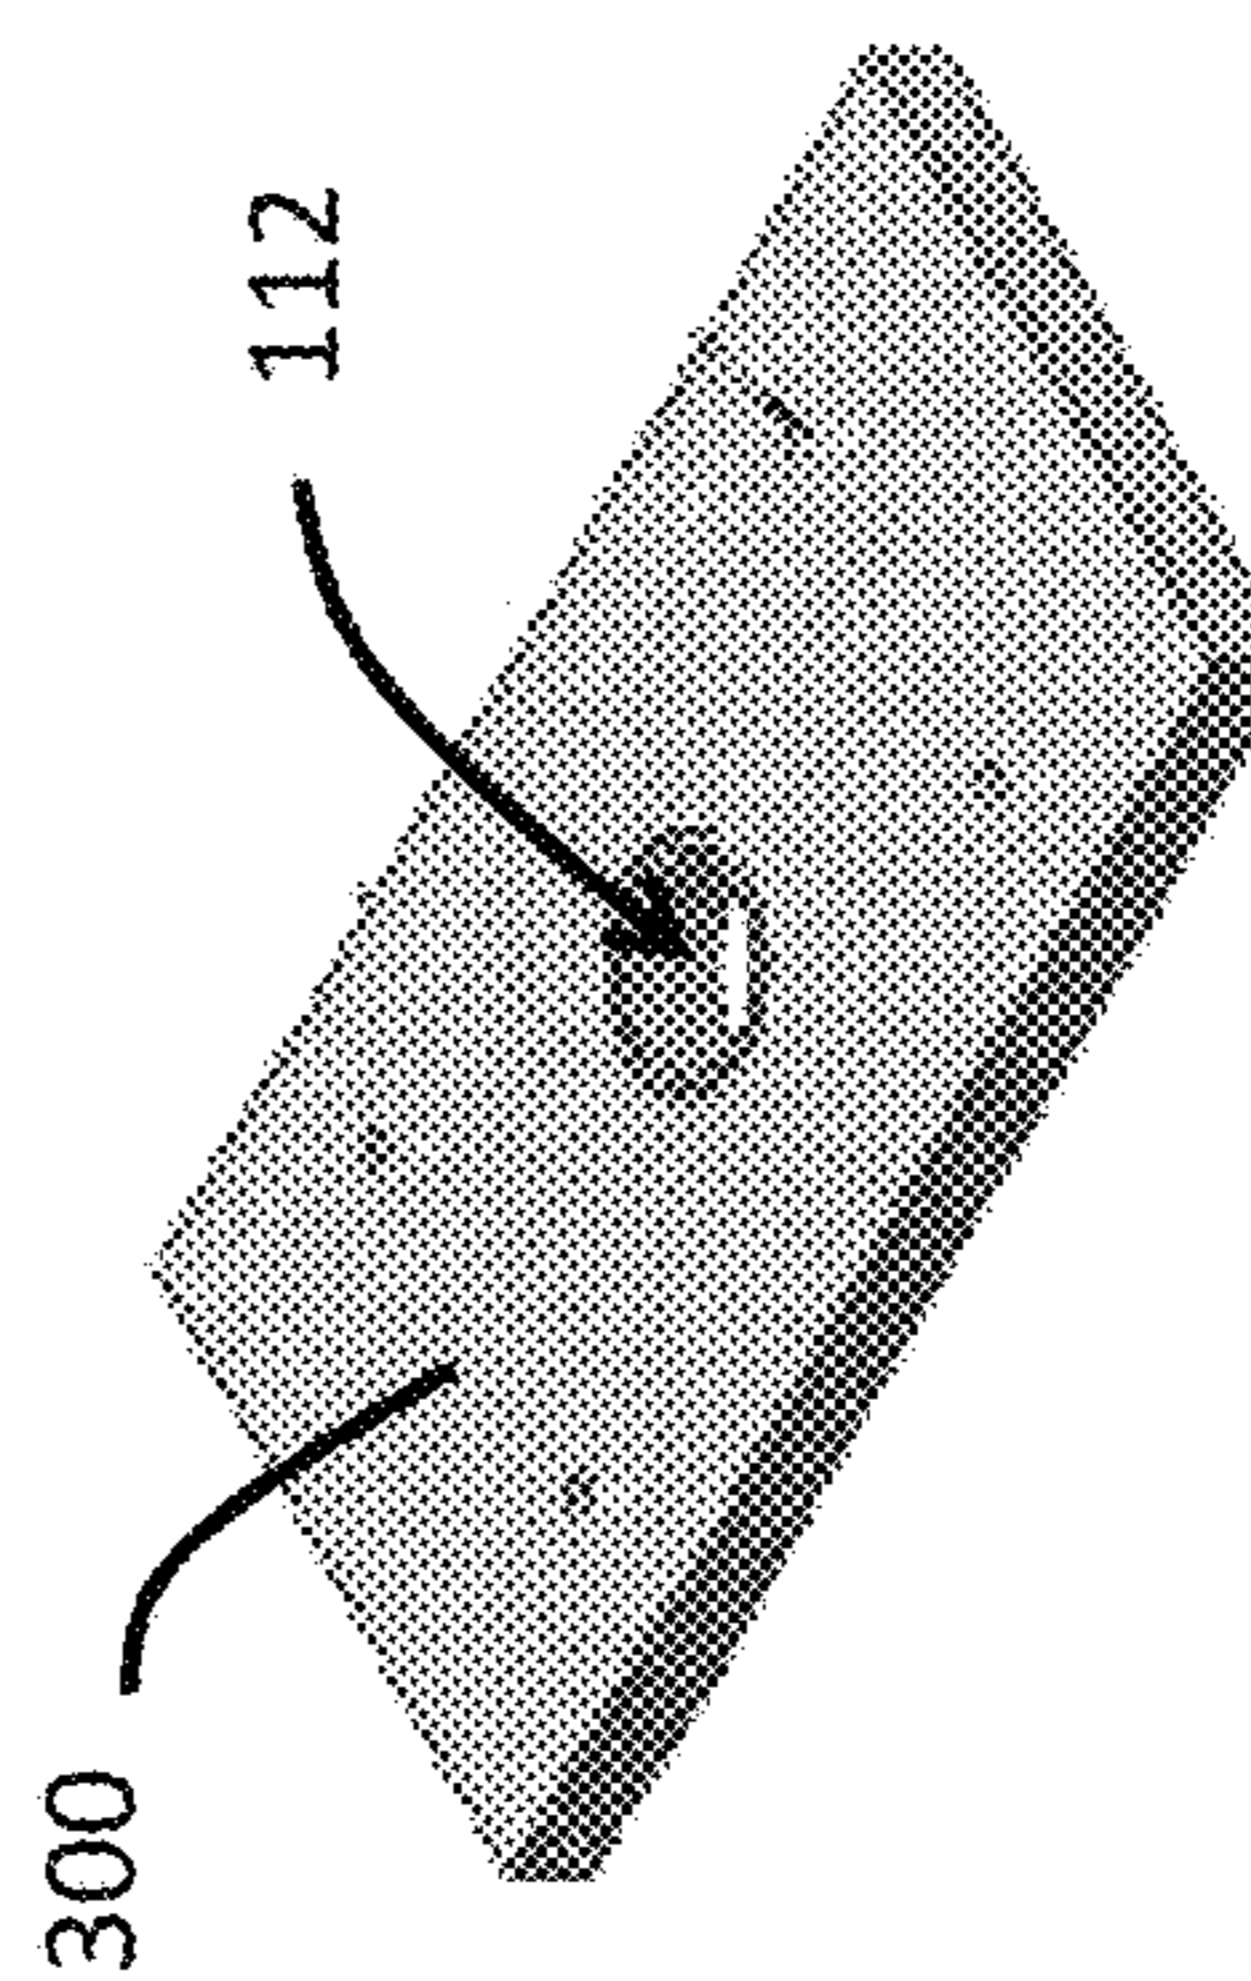


FIG. 31D

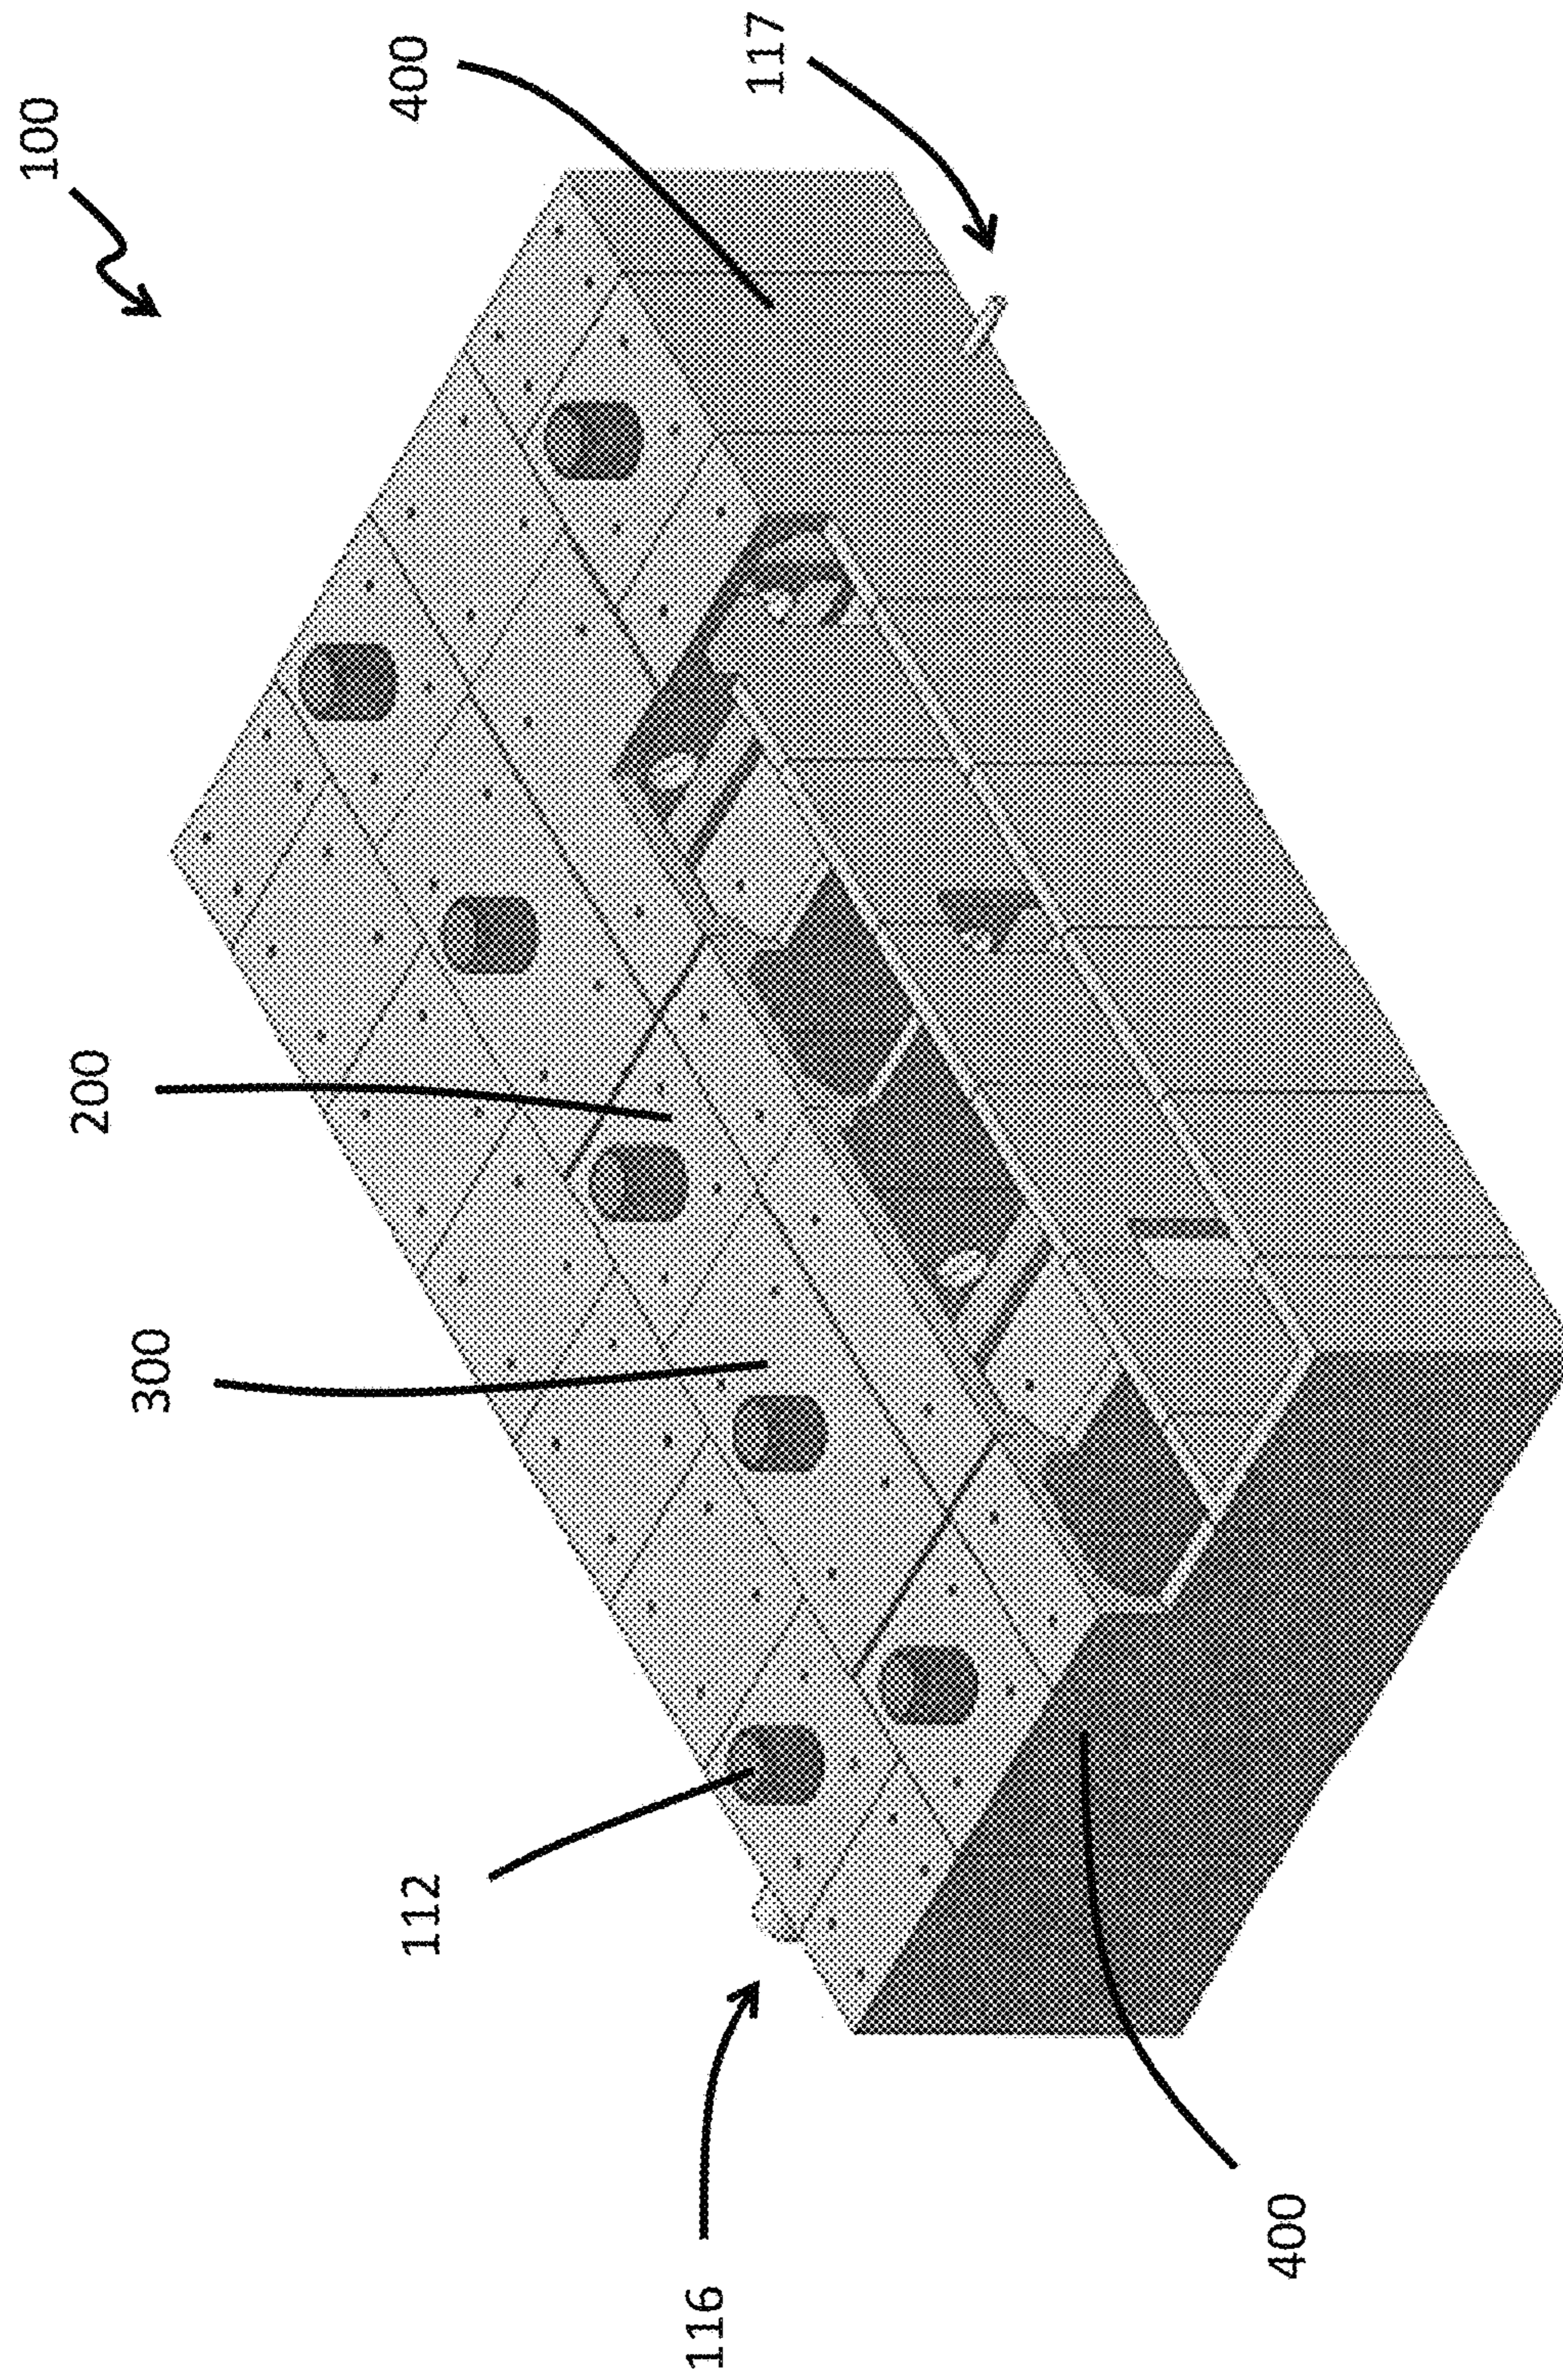


FIG. 32A

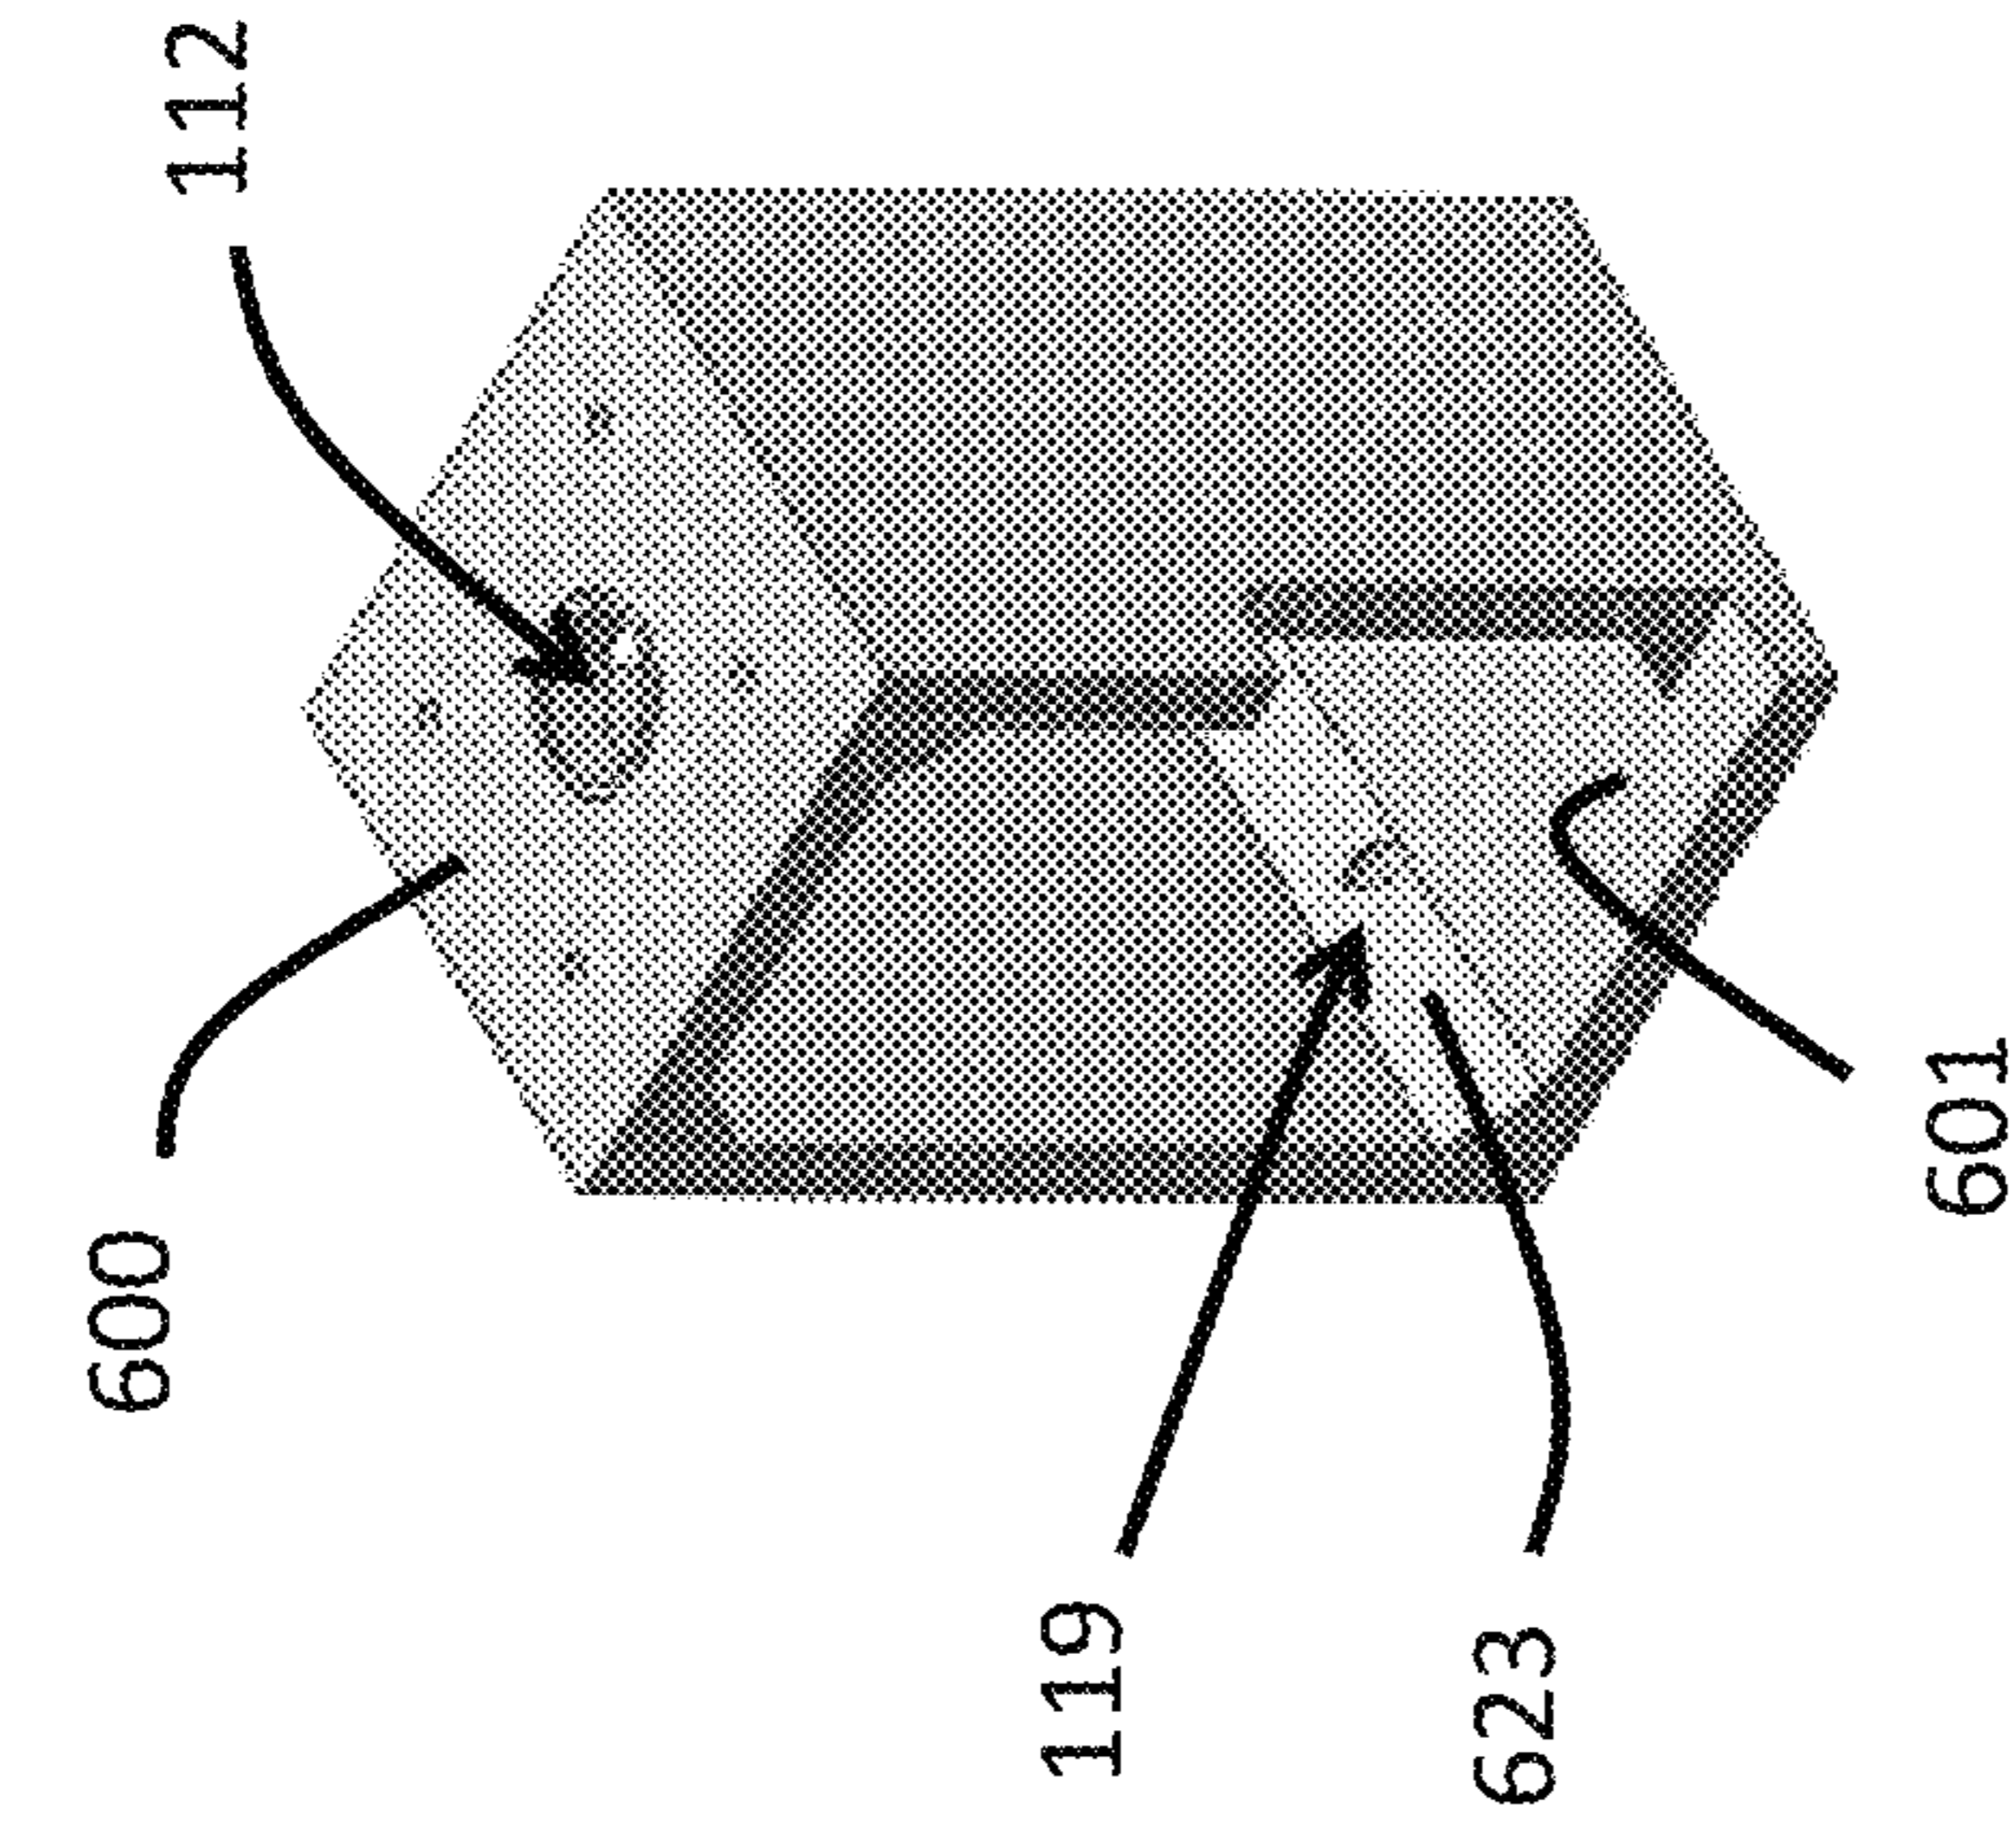


FIG. 32C

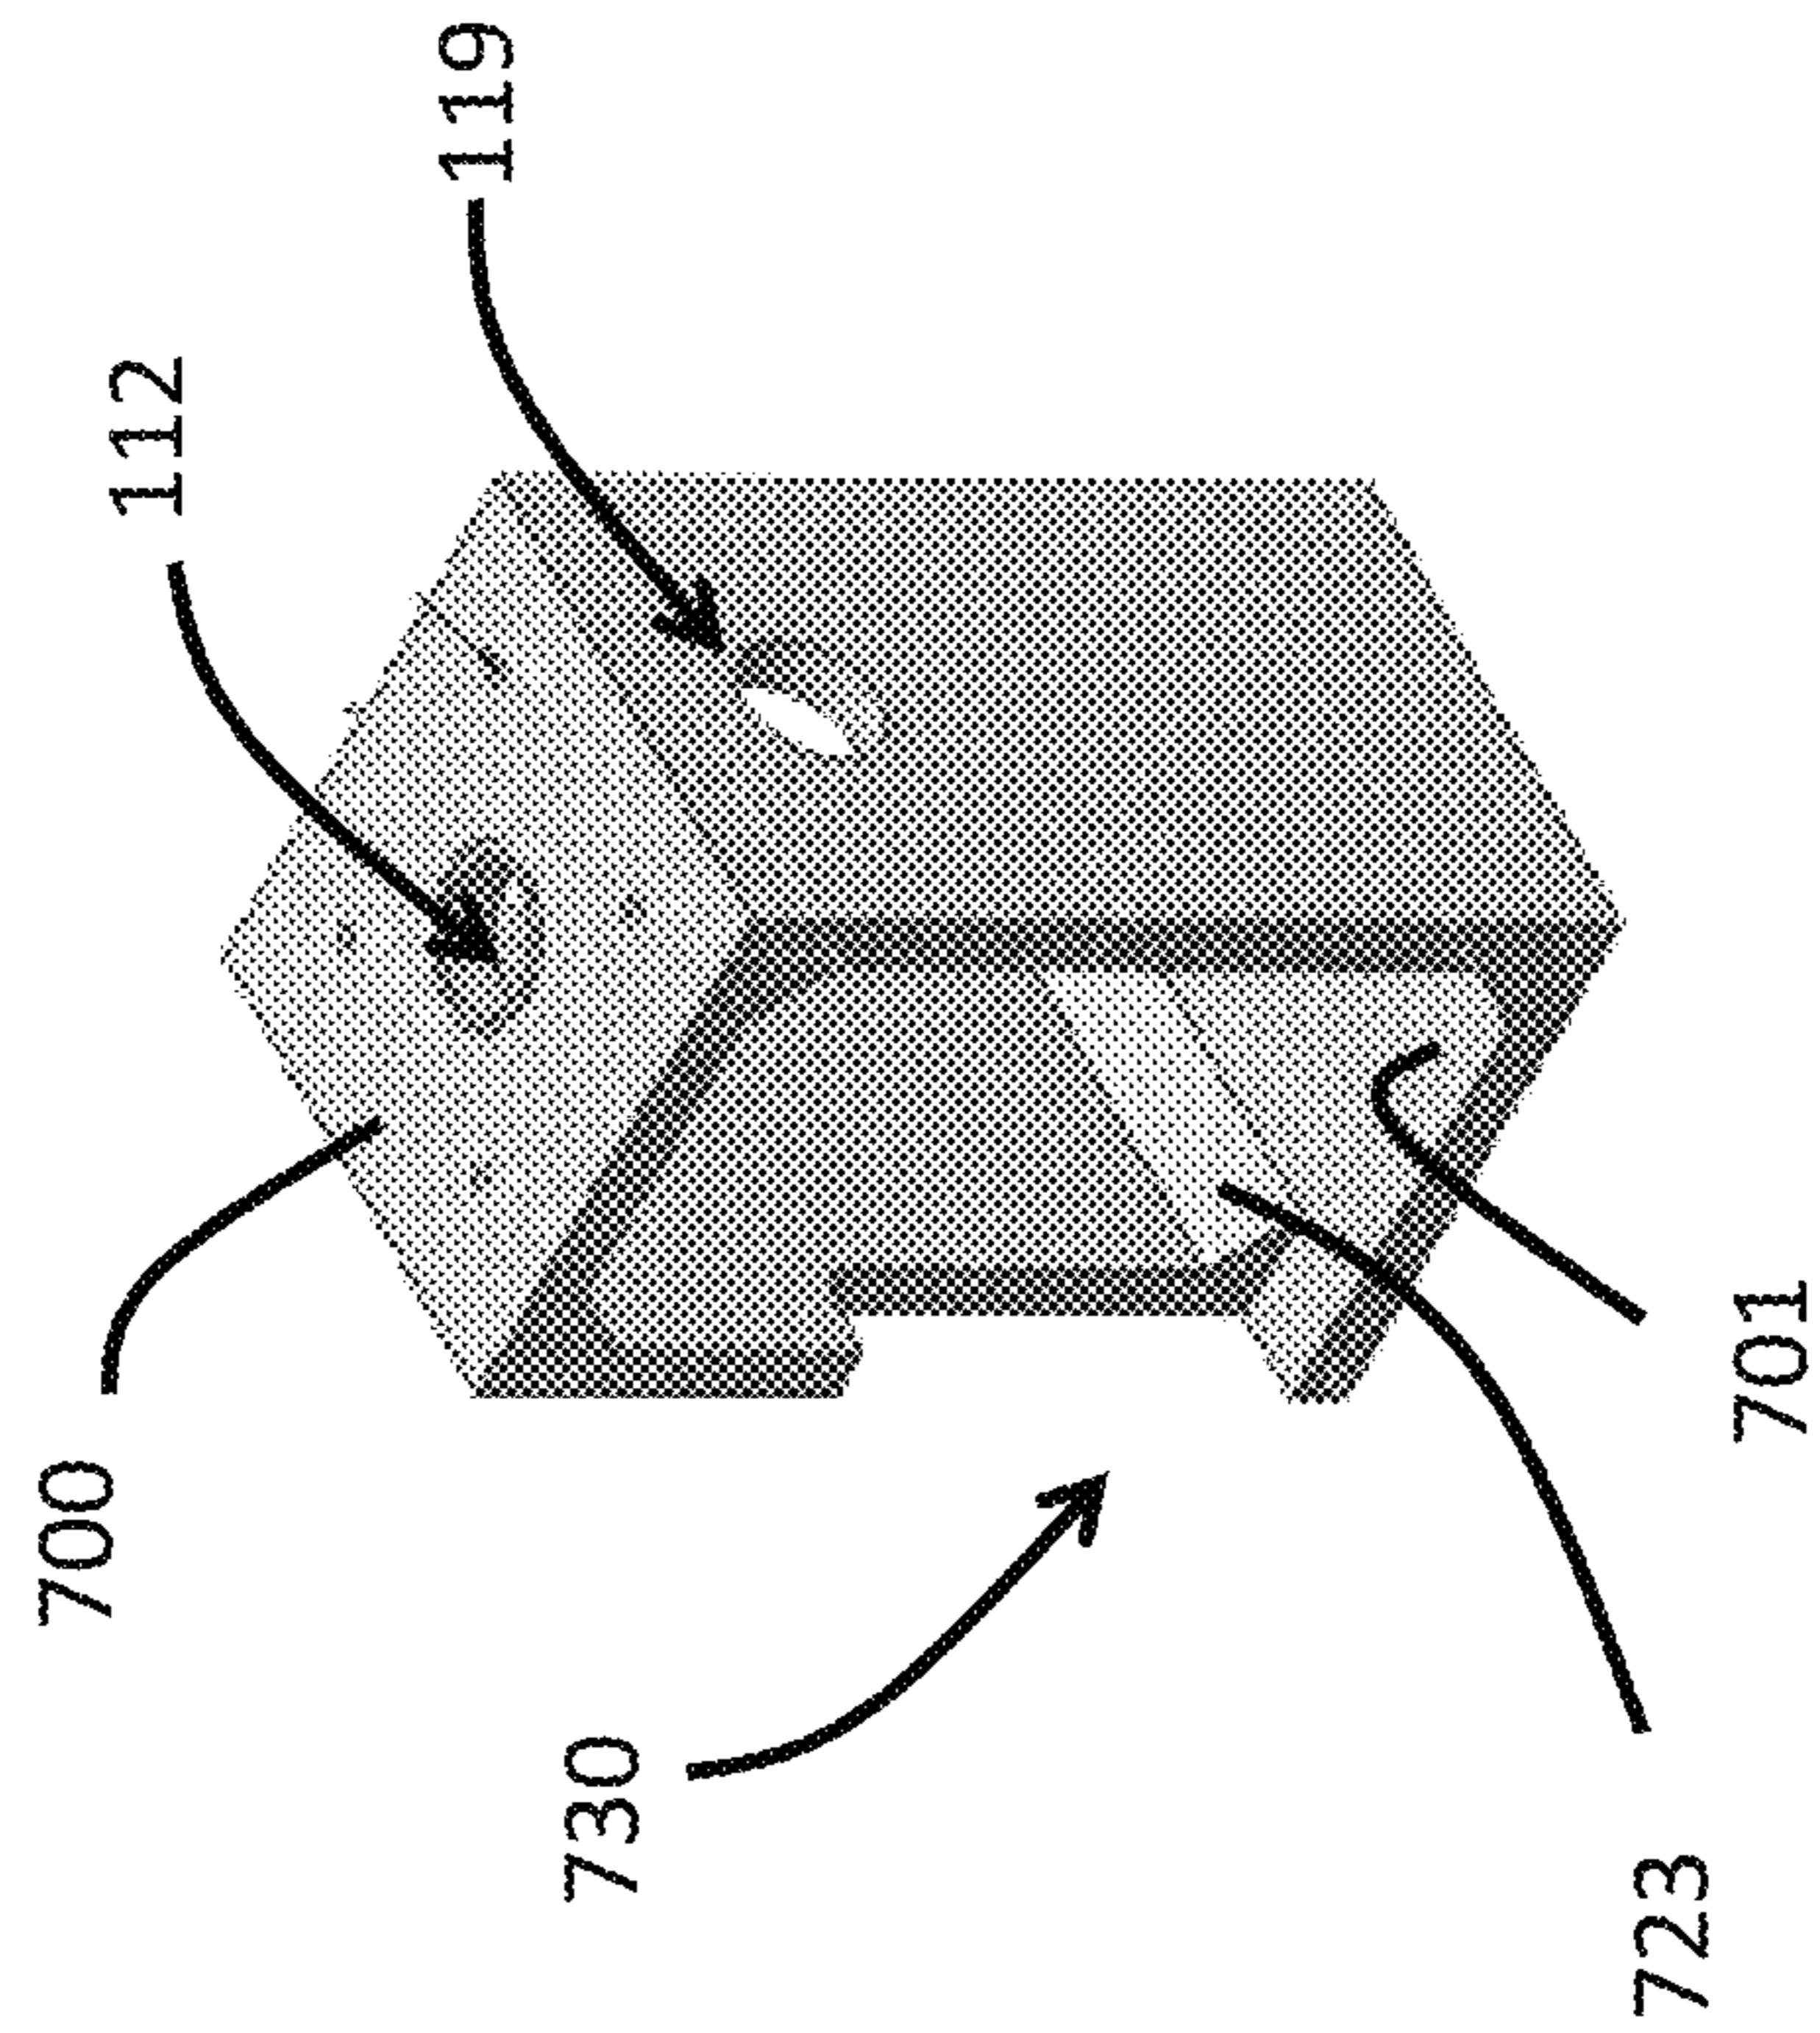


FIG. 32B

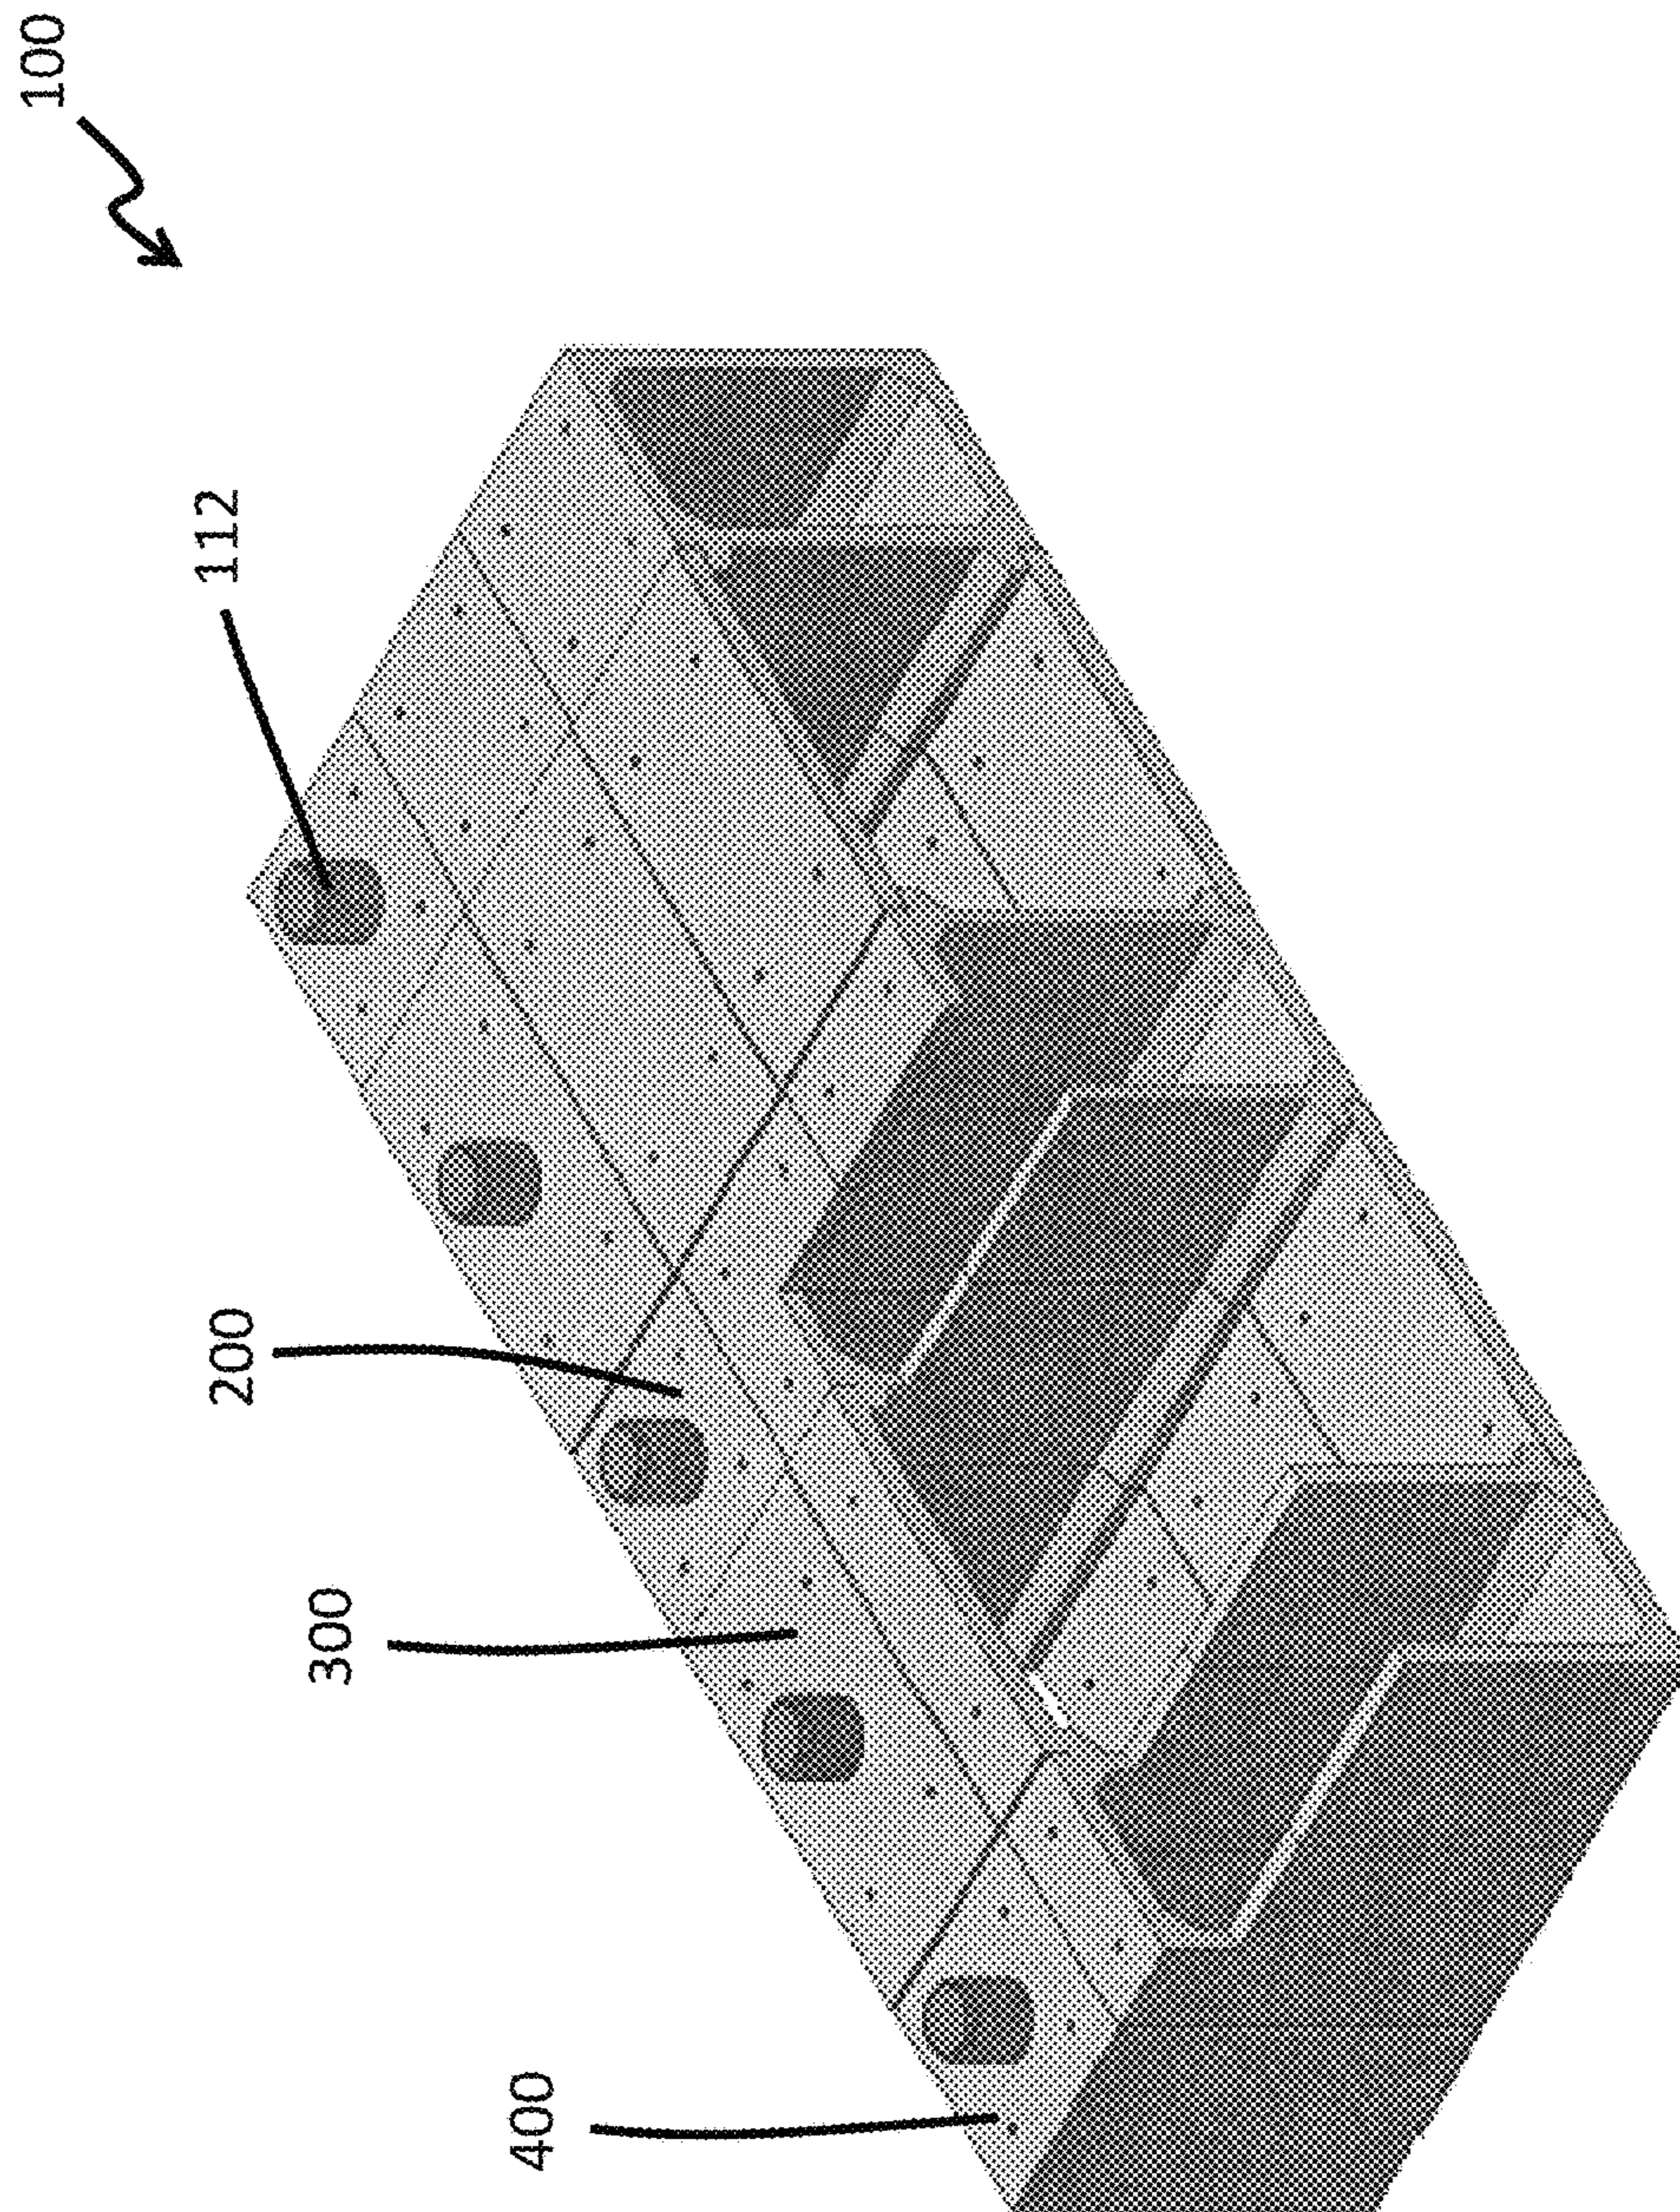


FIG. 33A

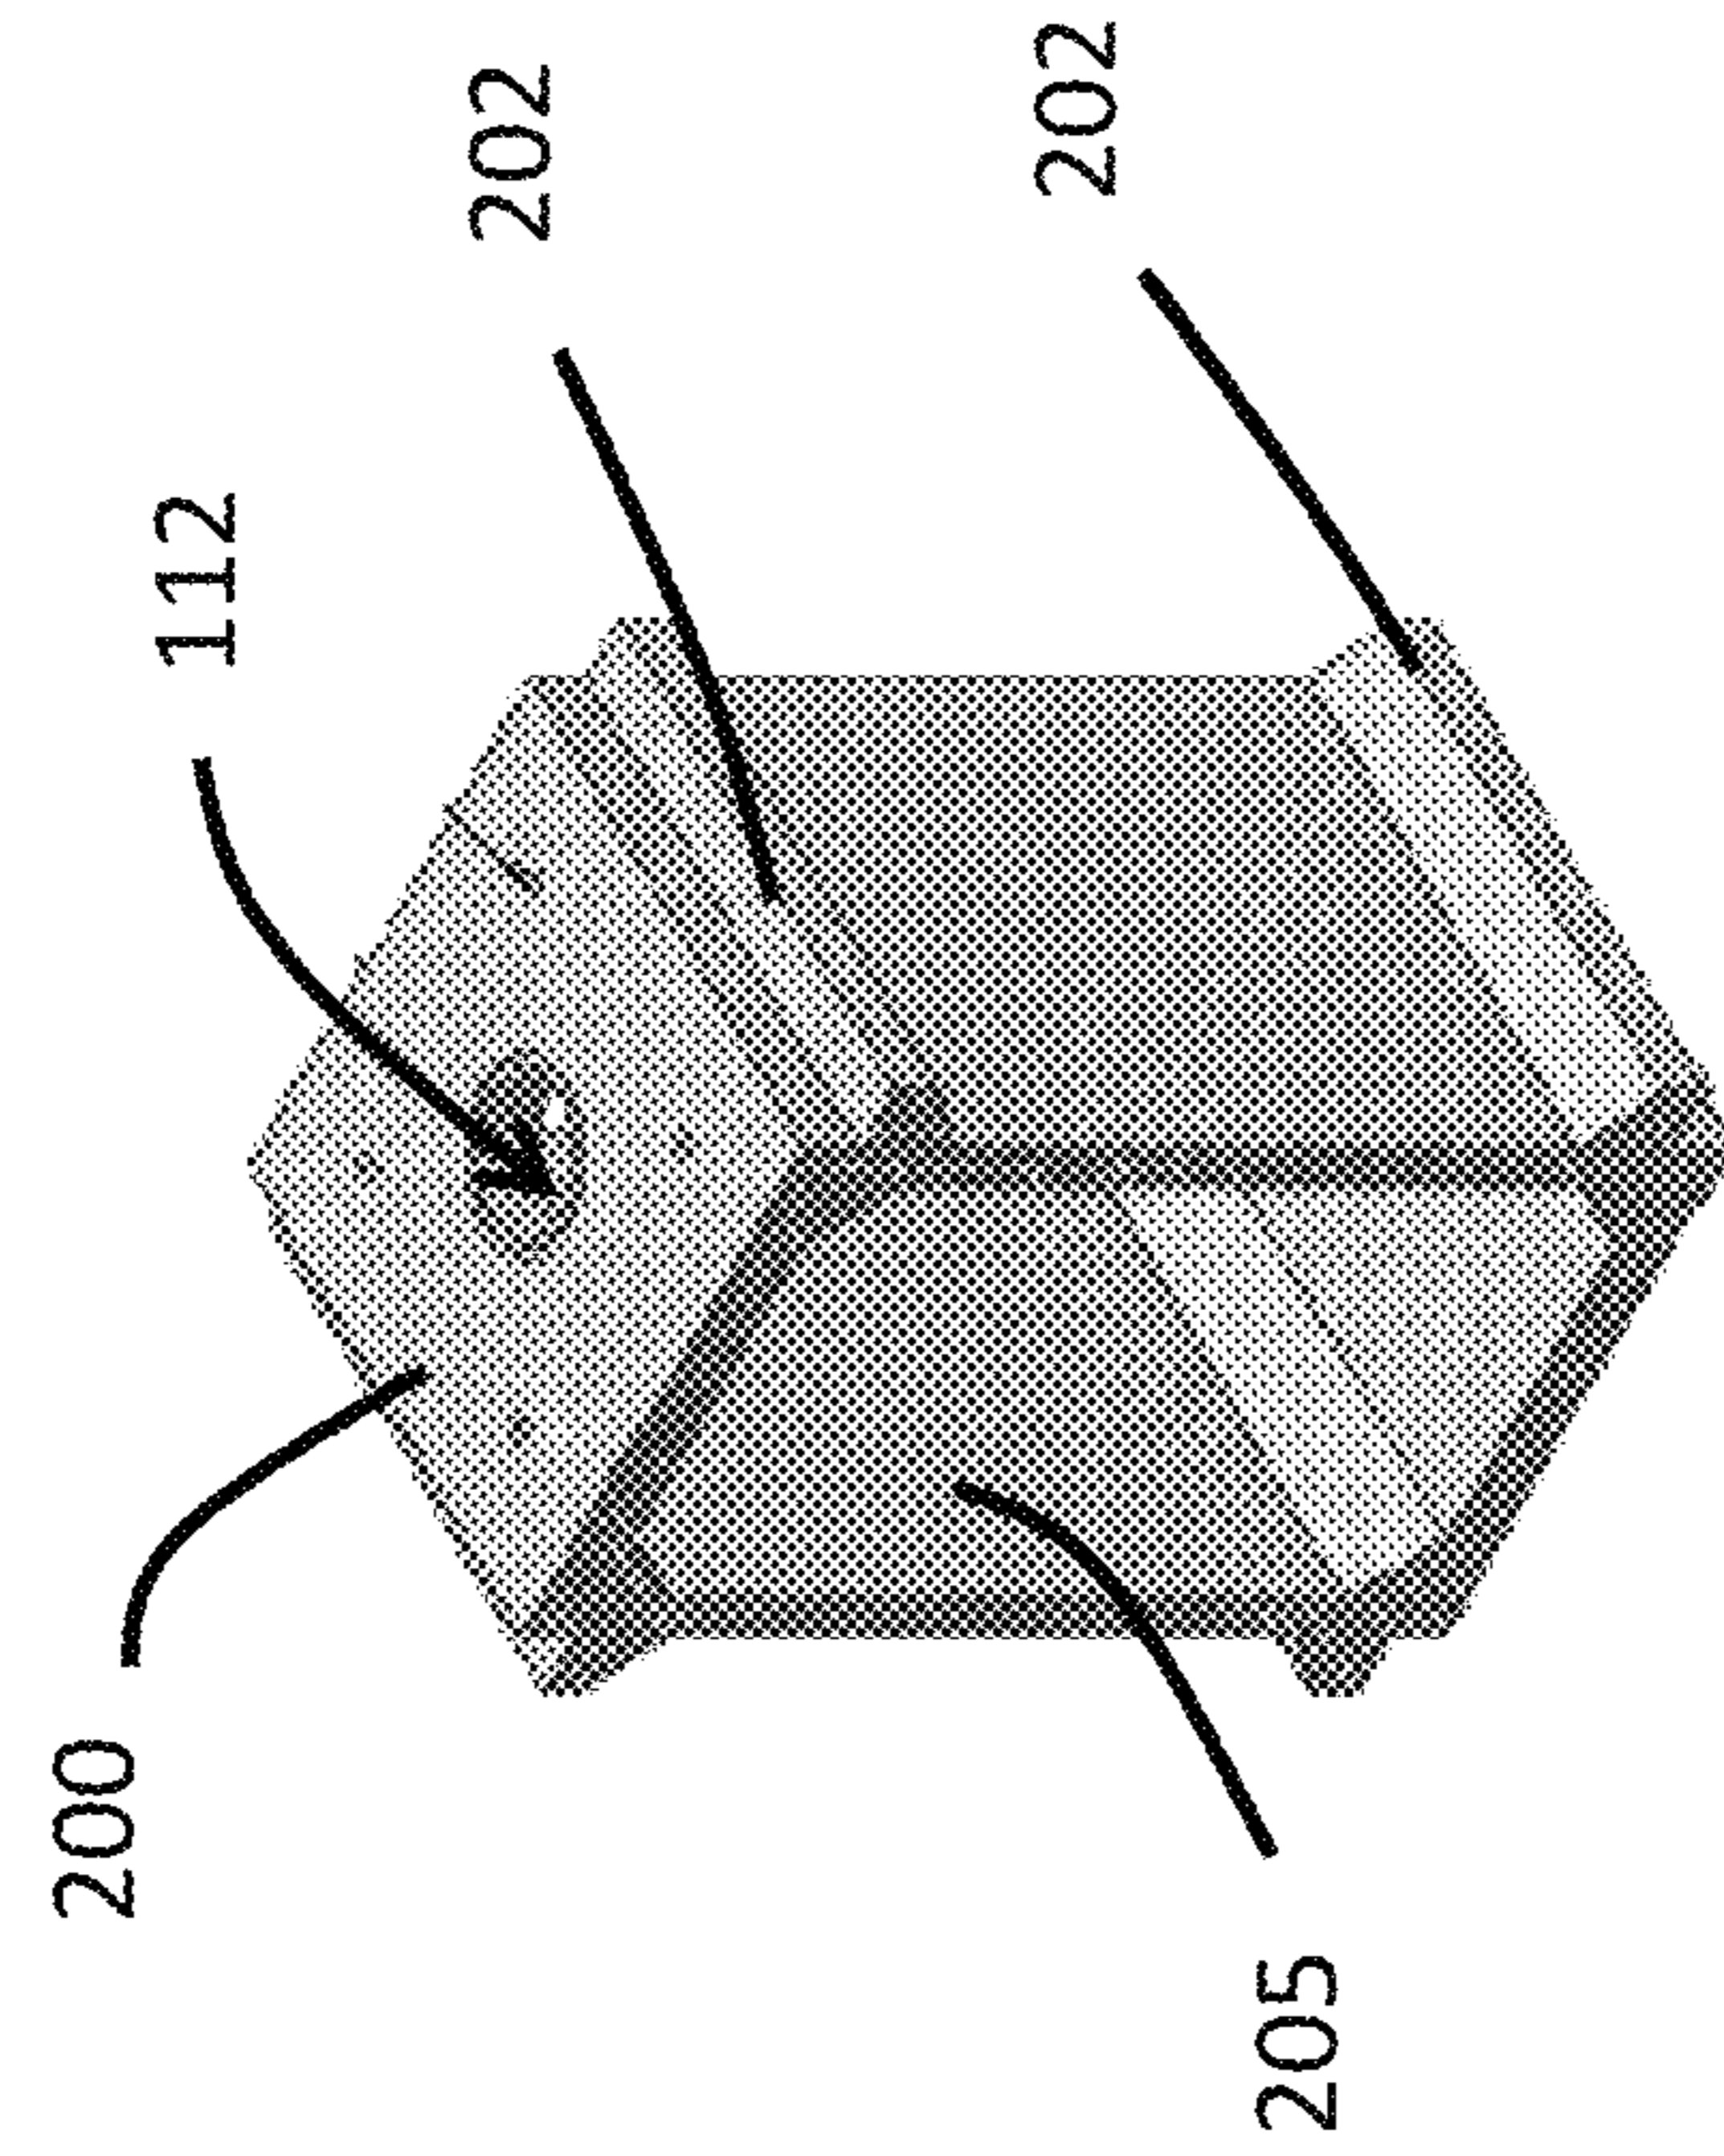


FIG. 33B

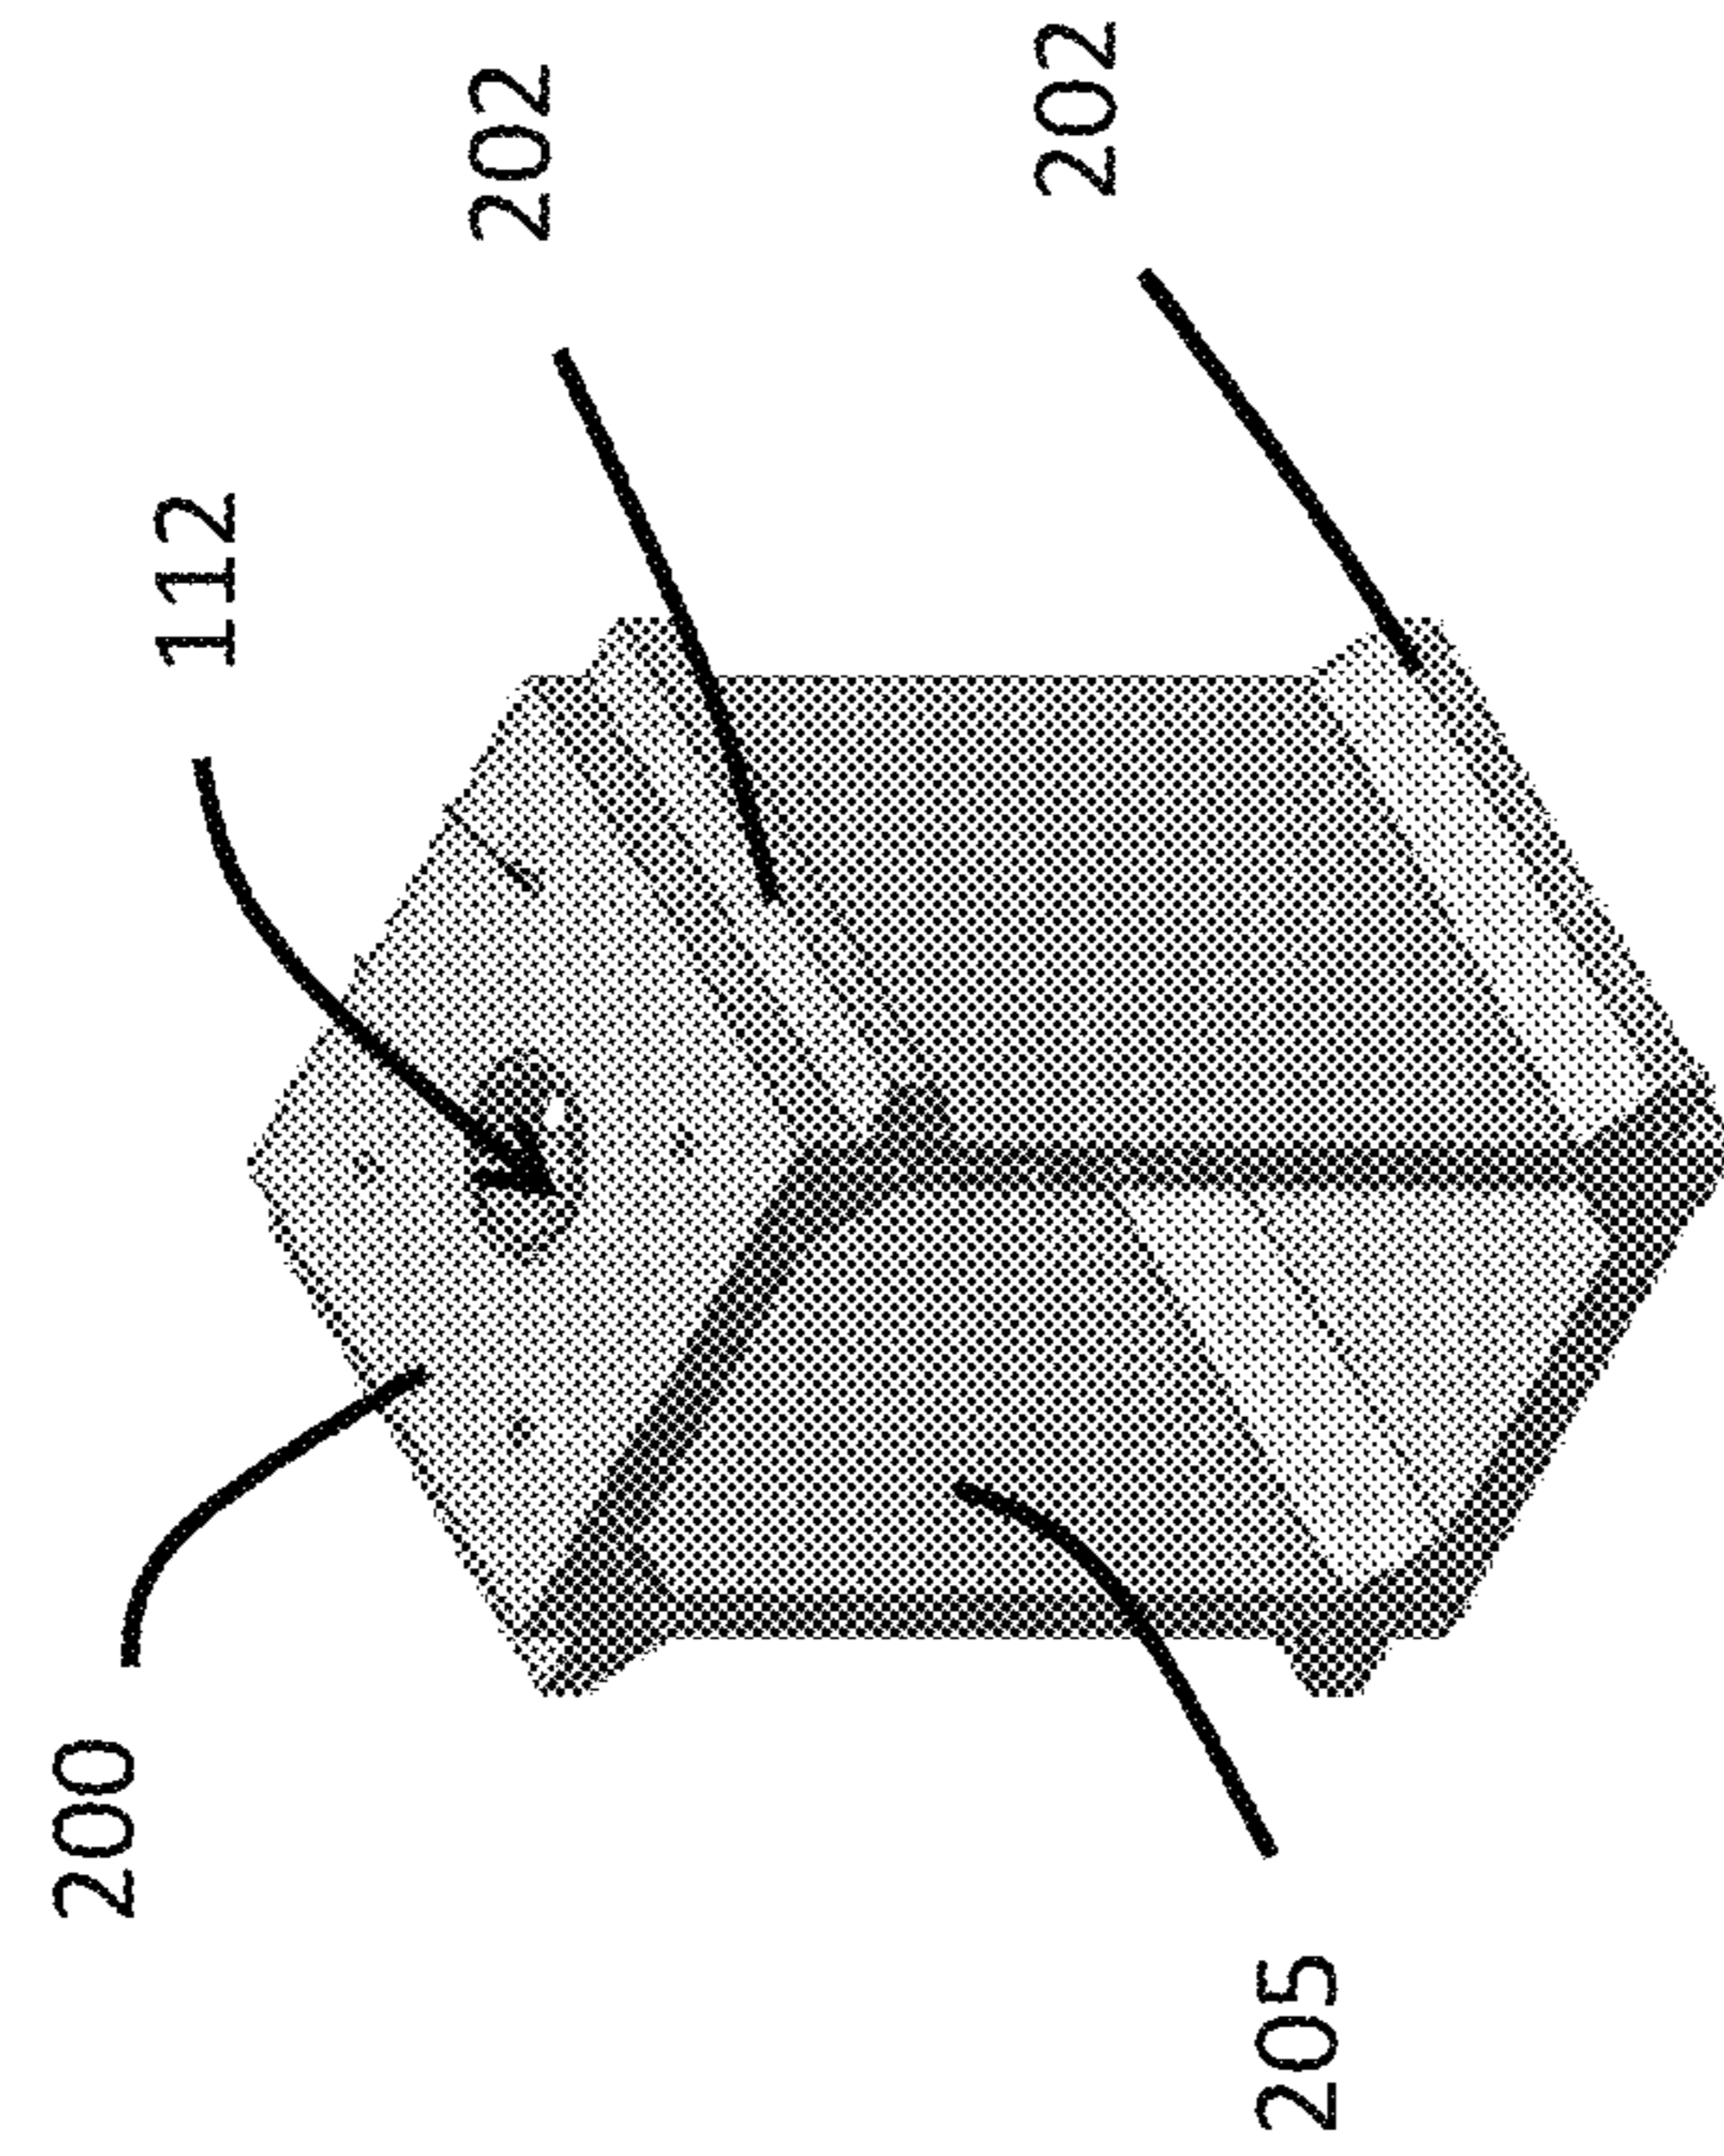


FIG. 33C

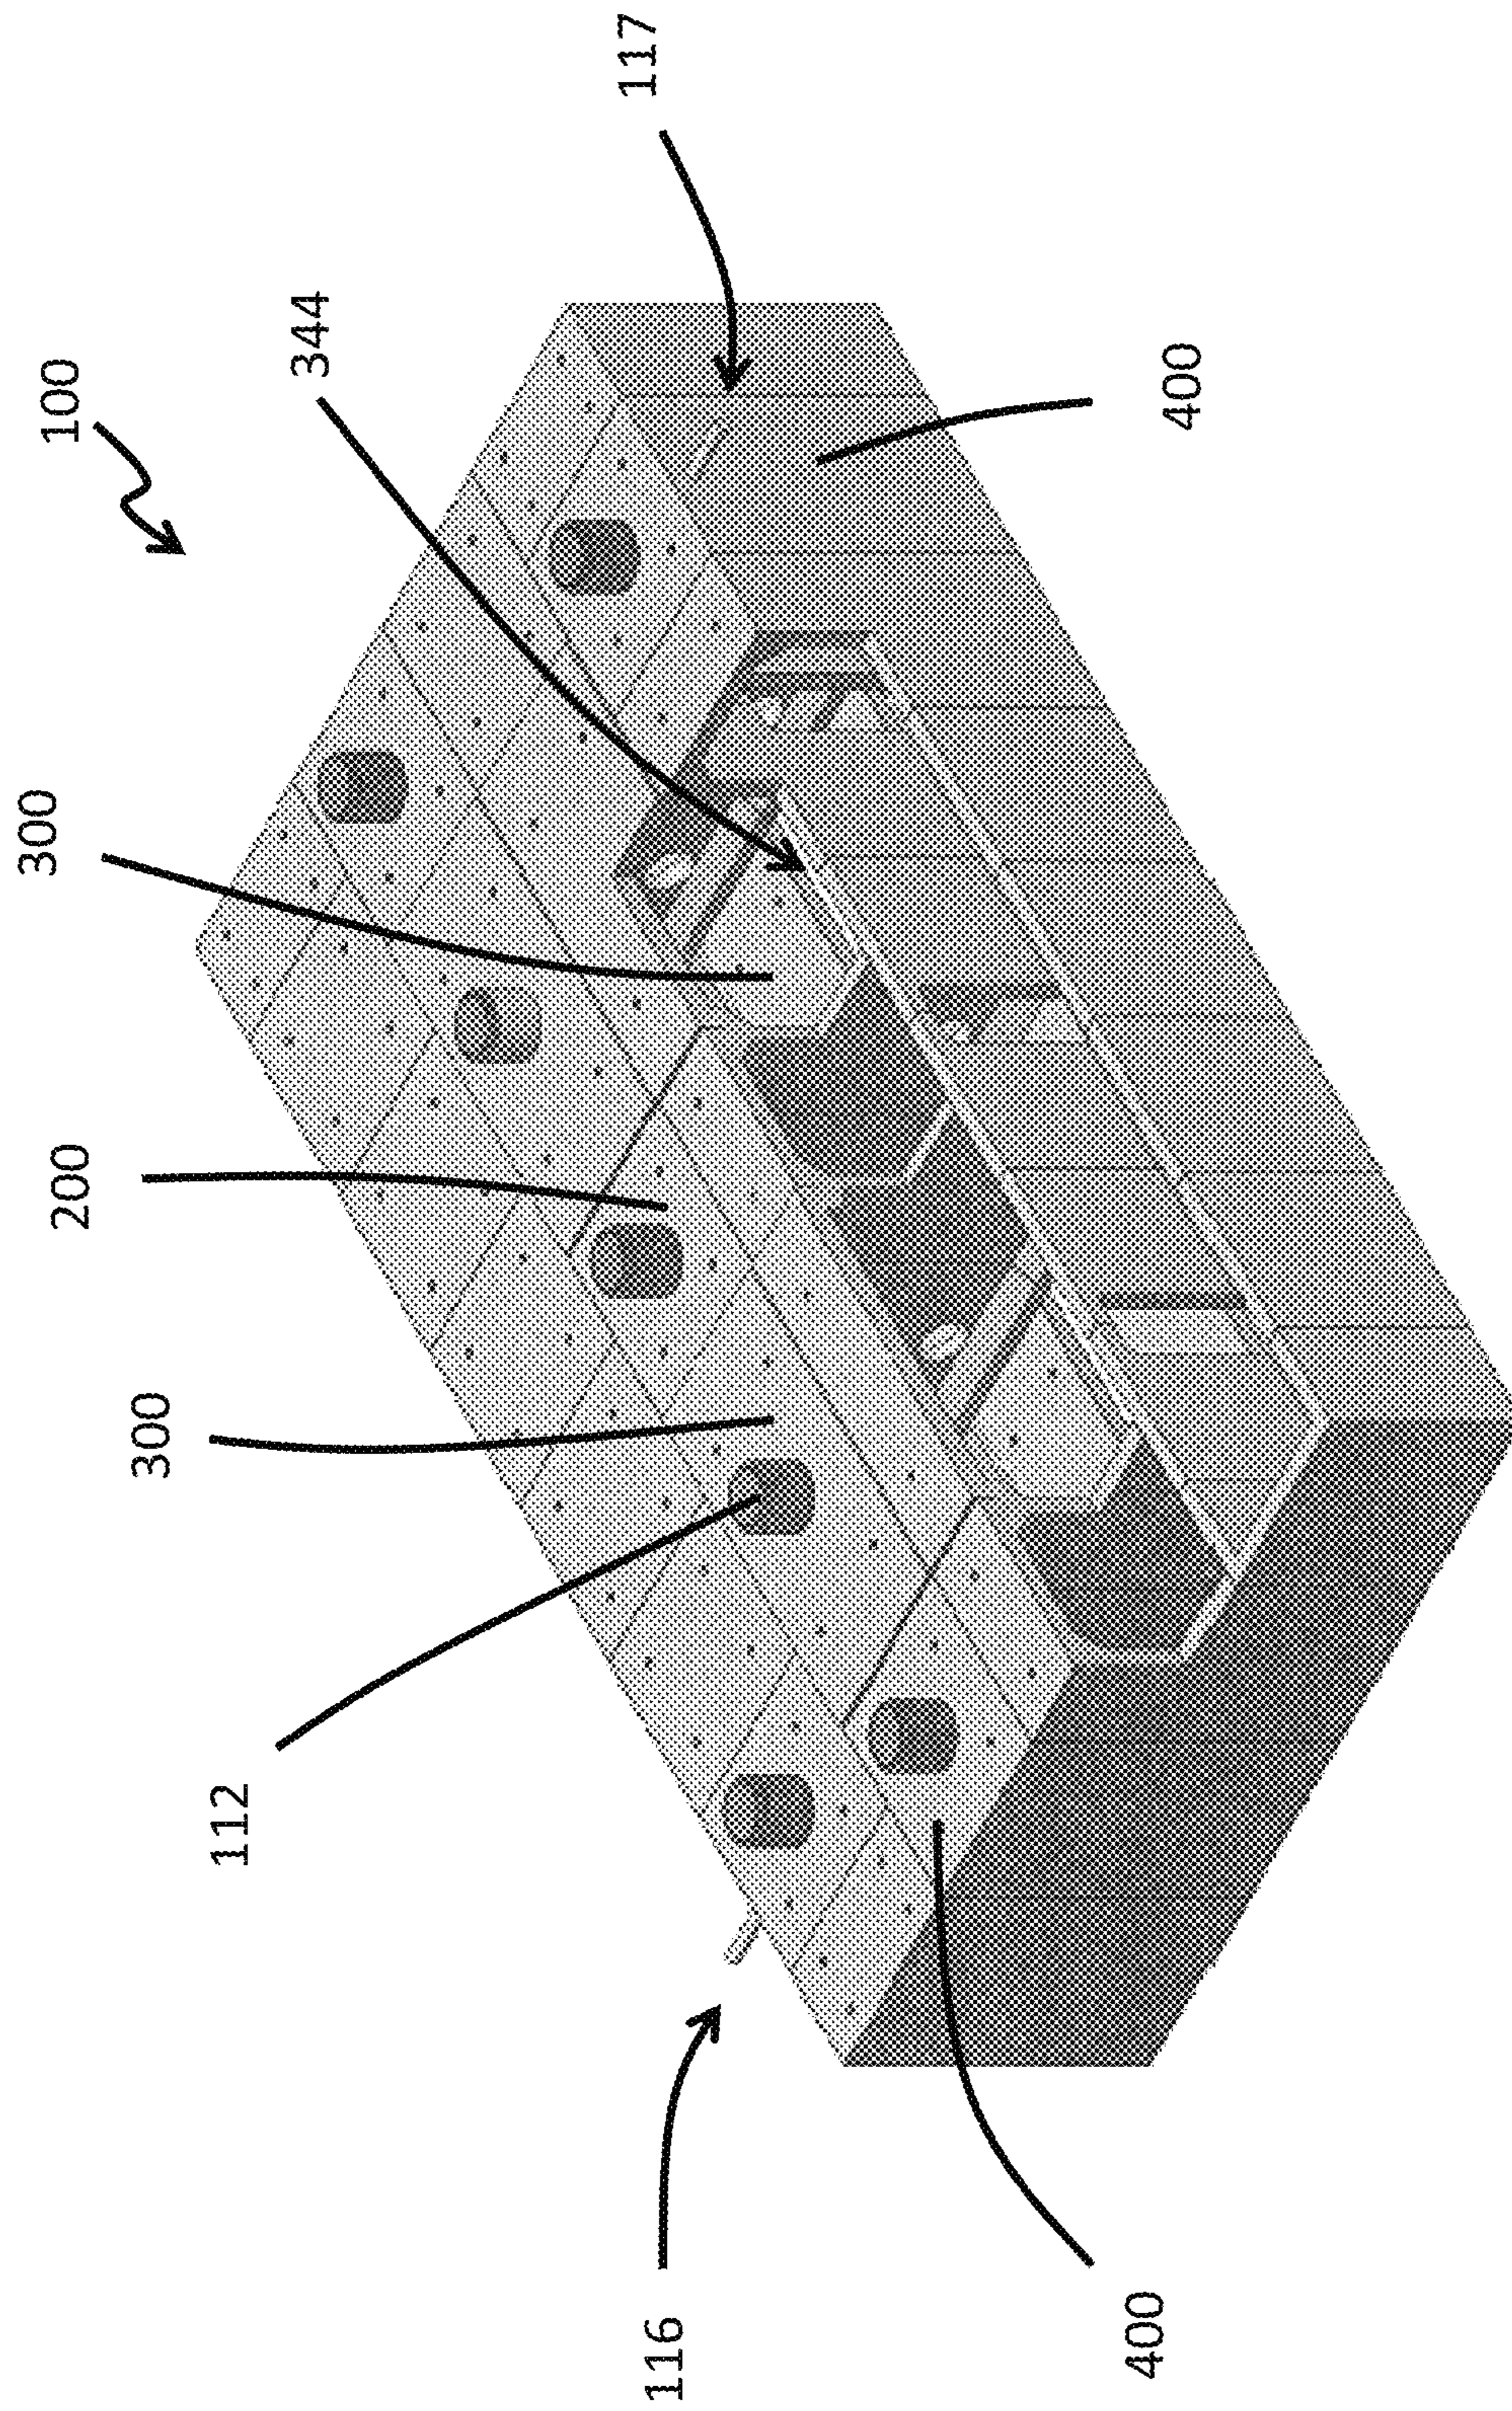


FIG. 34A

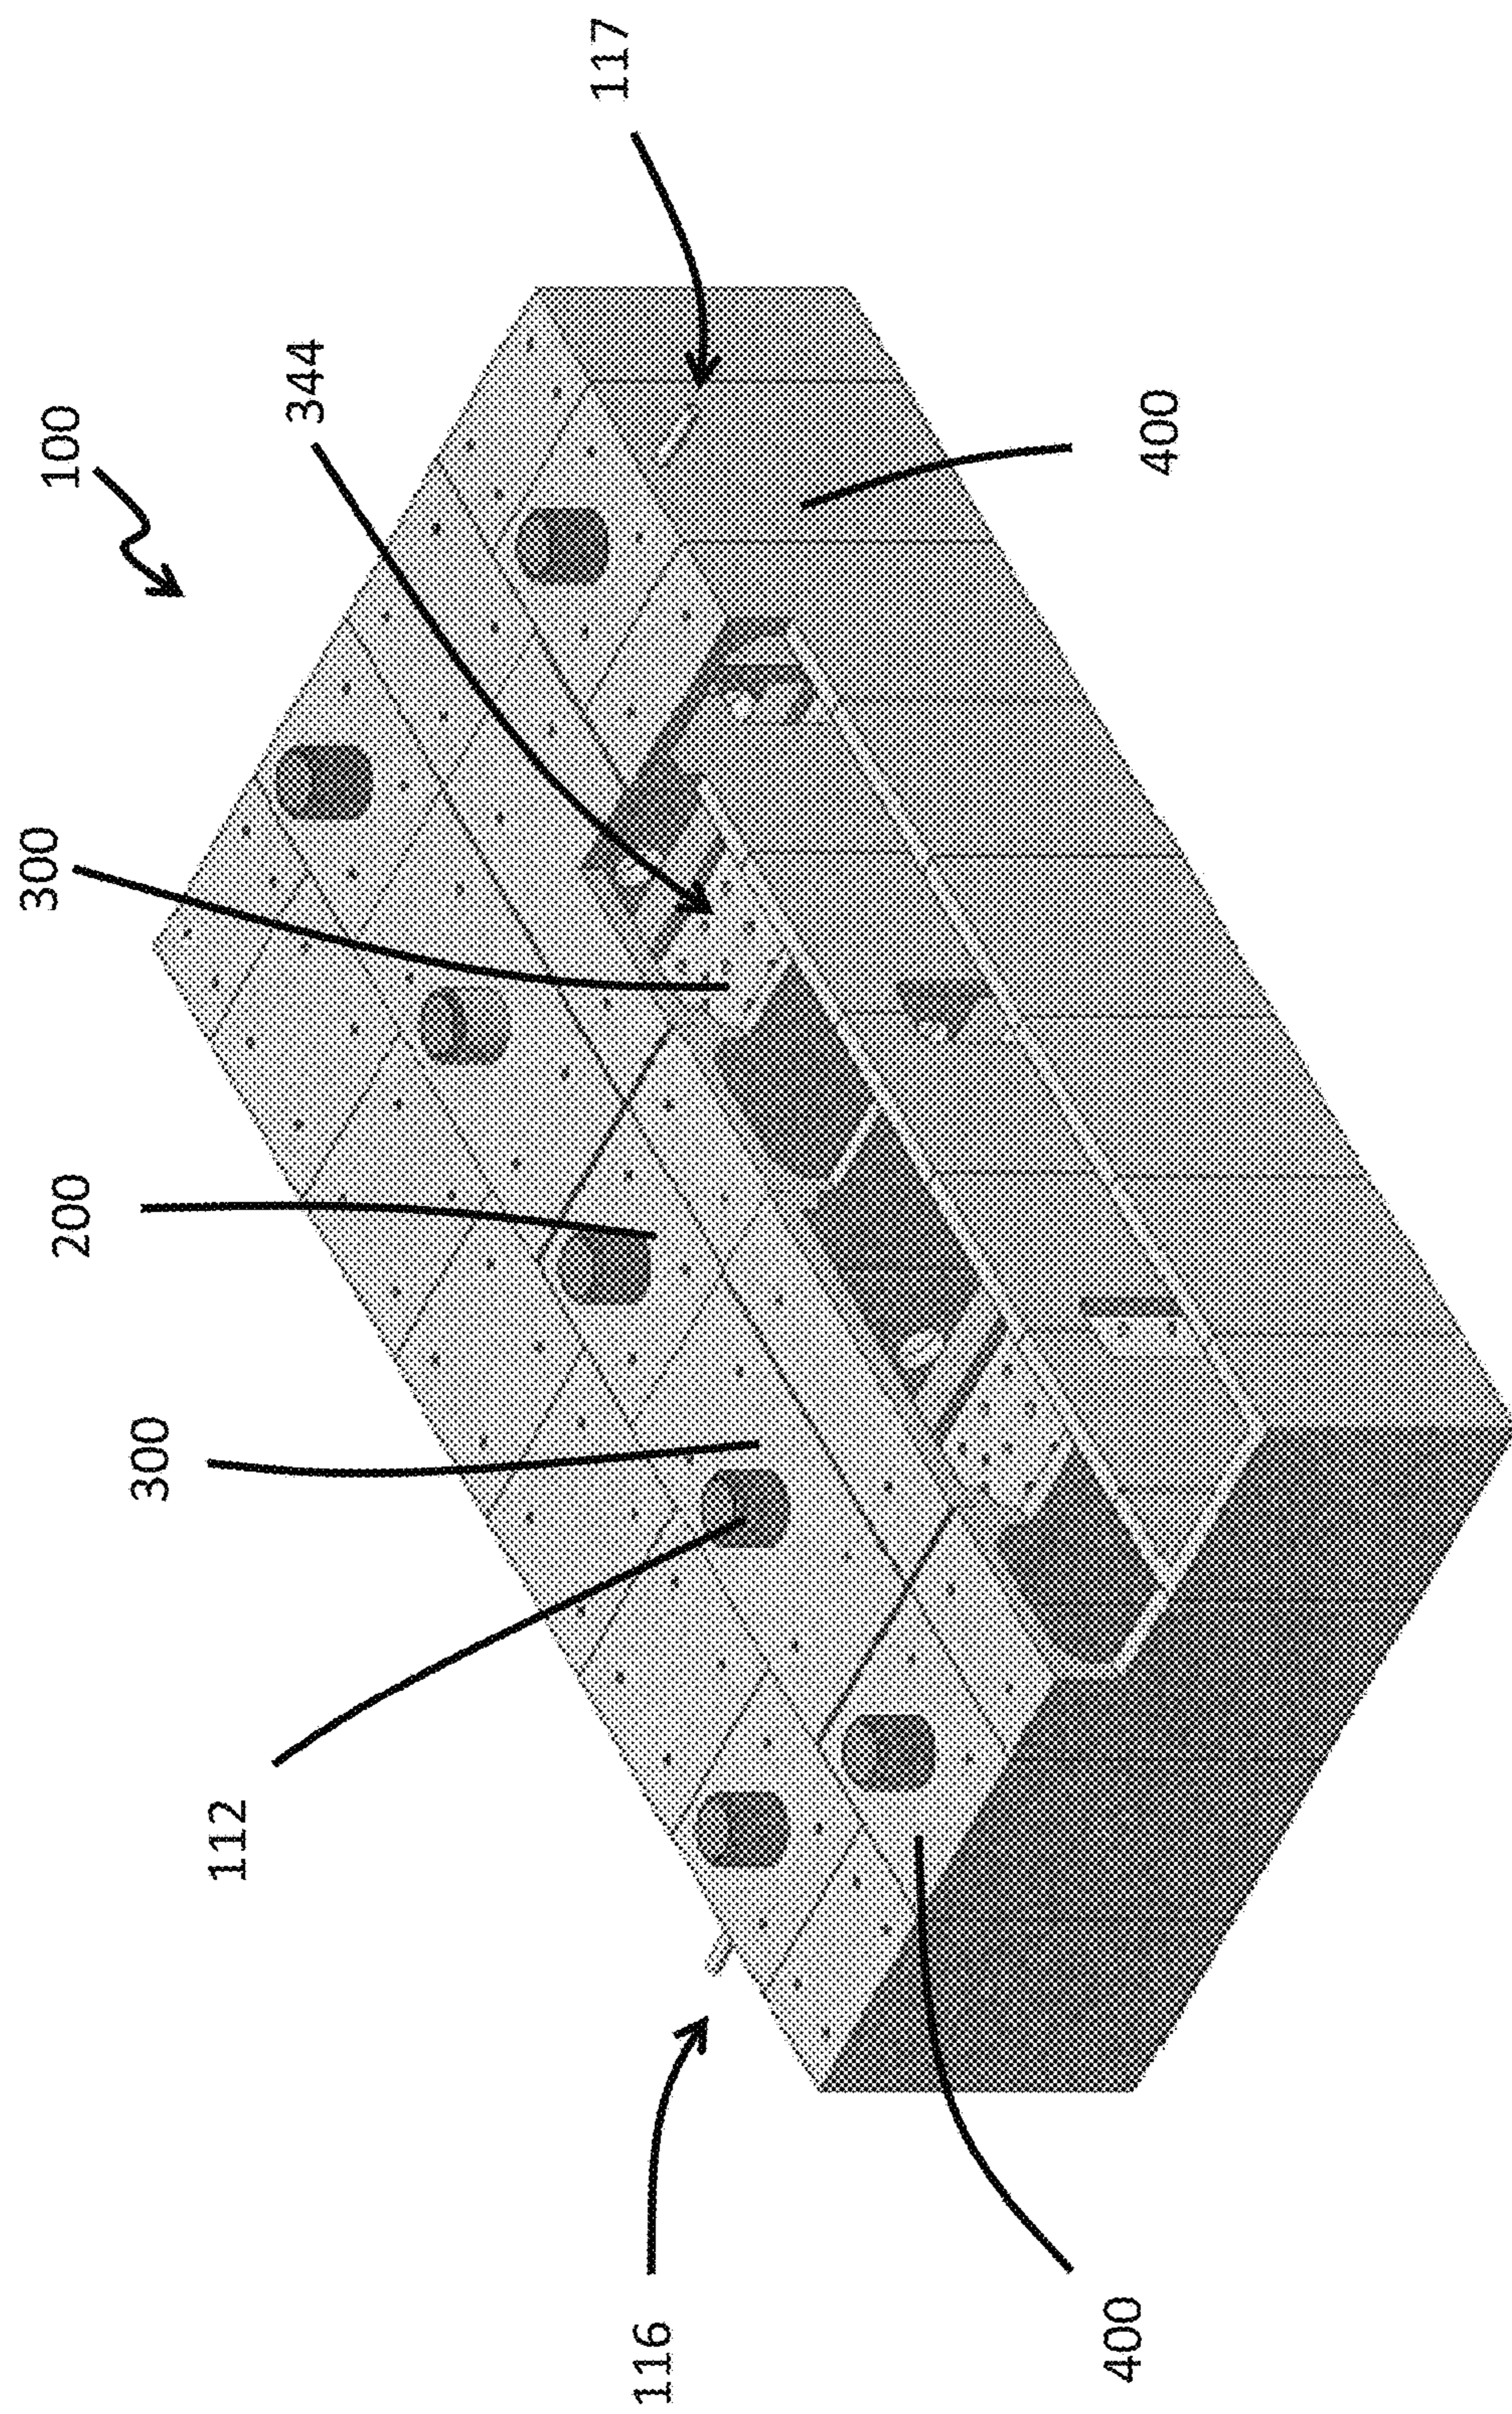


FIG. 34B

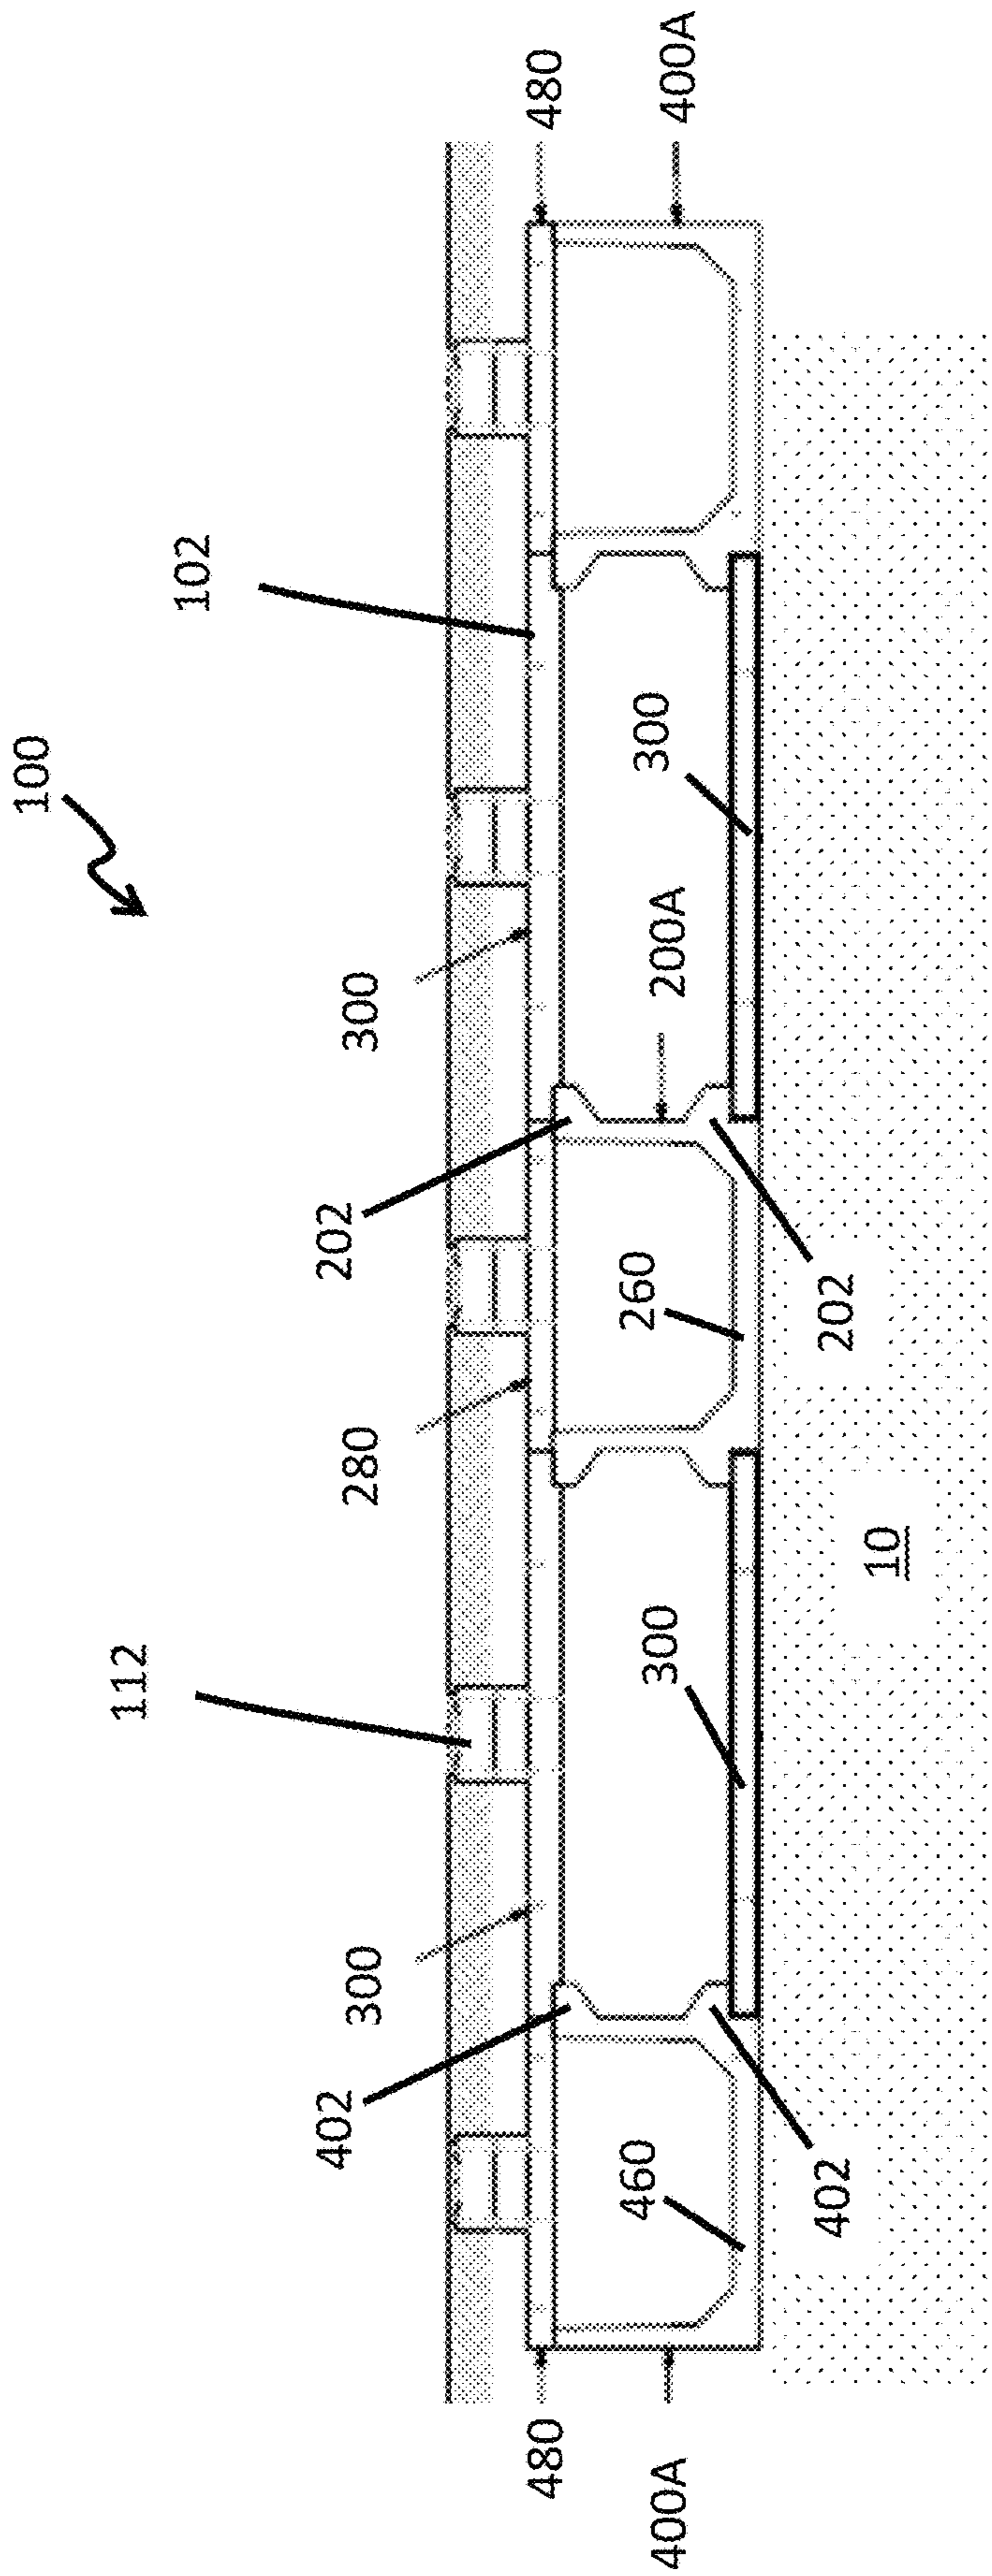


FIG. 35

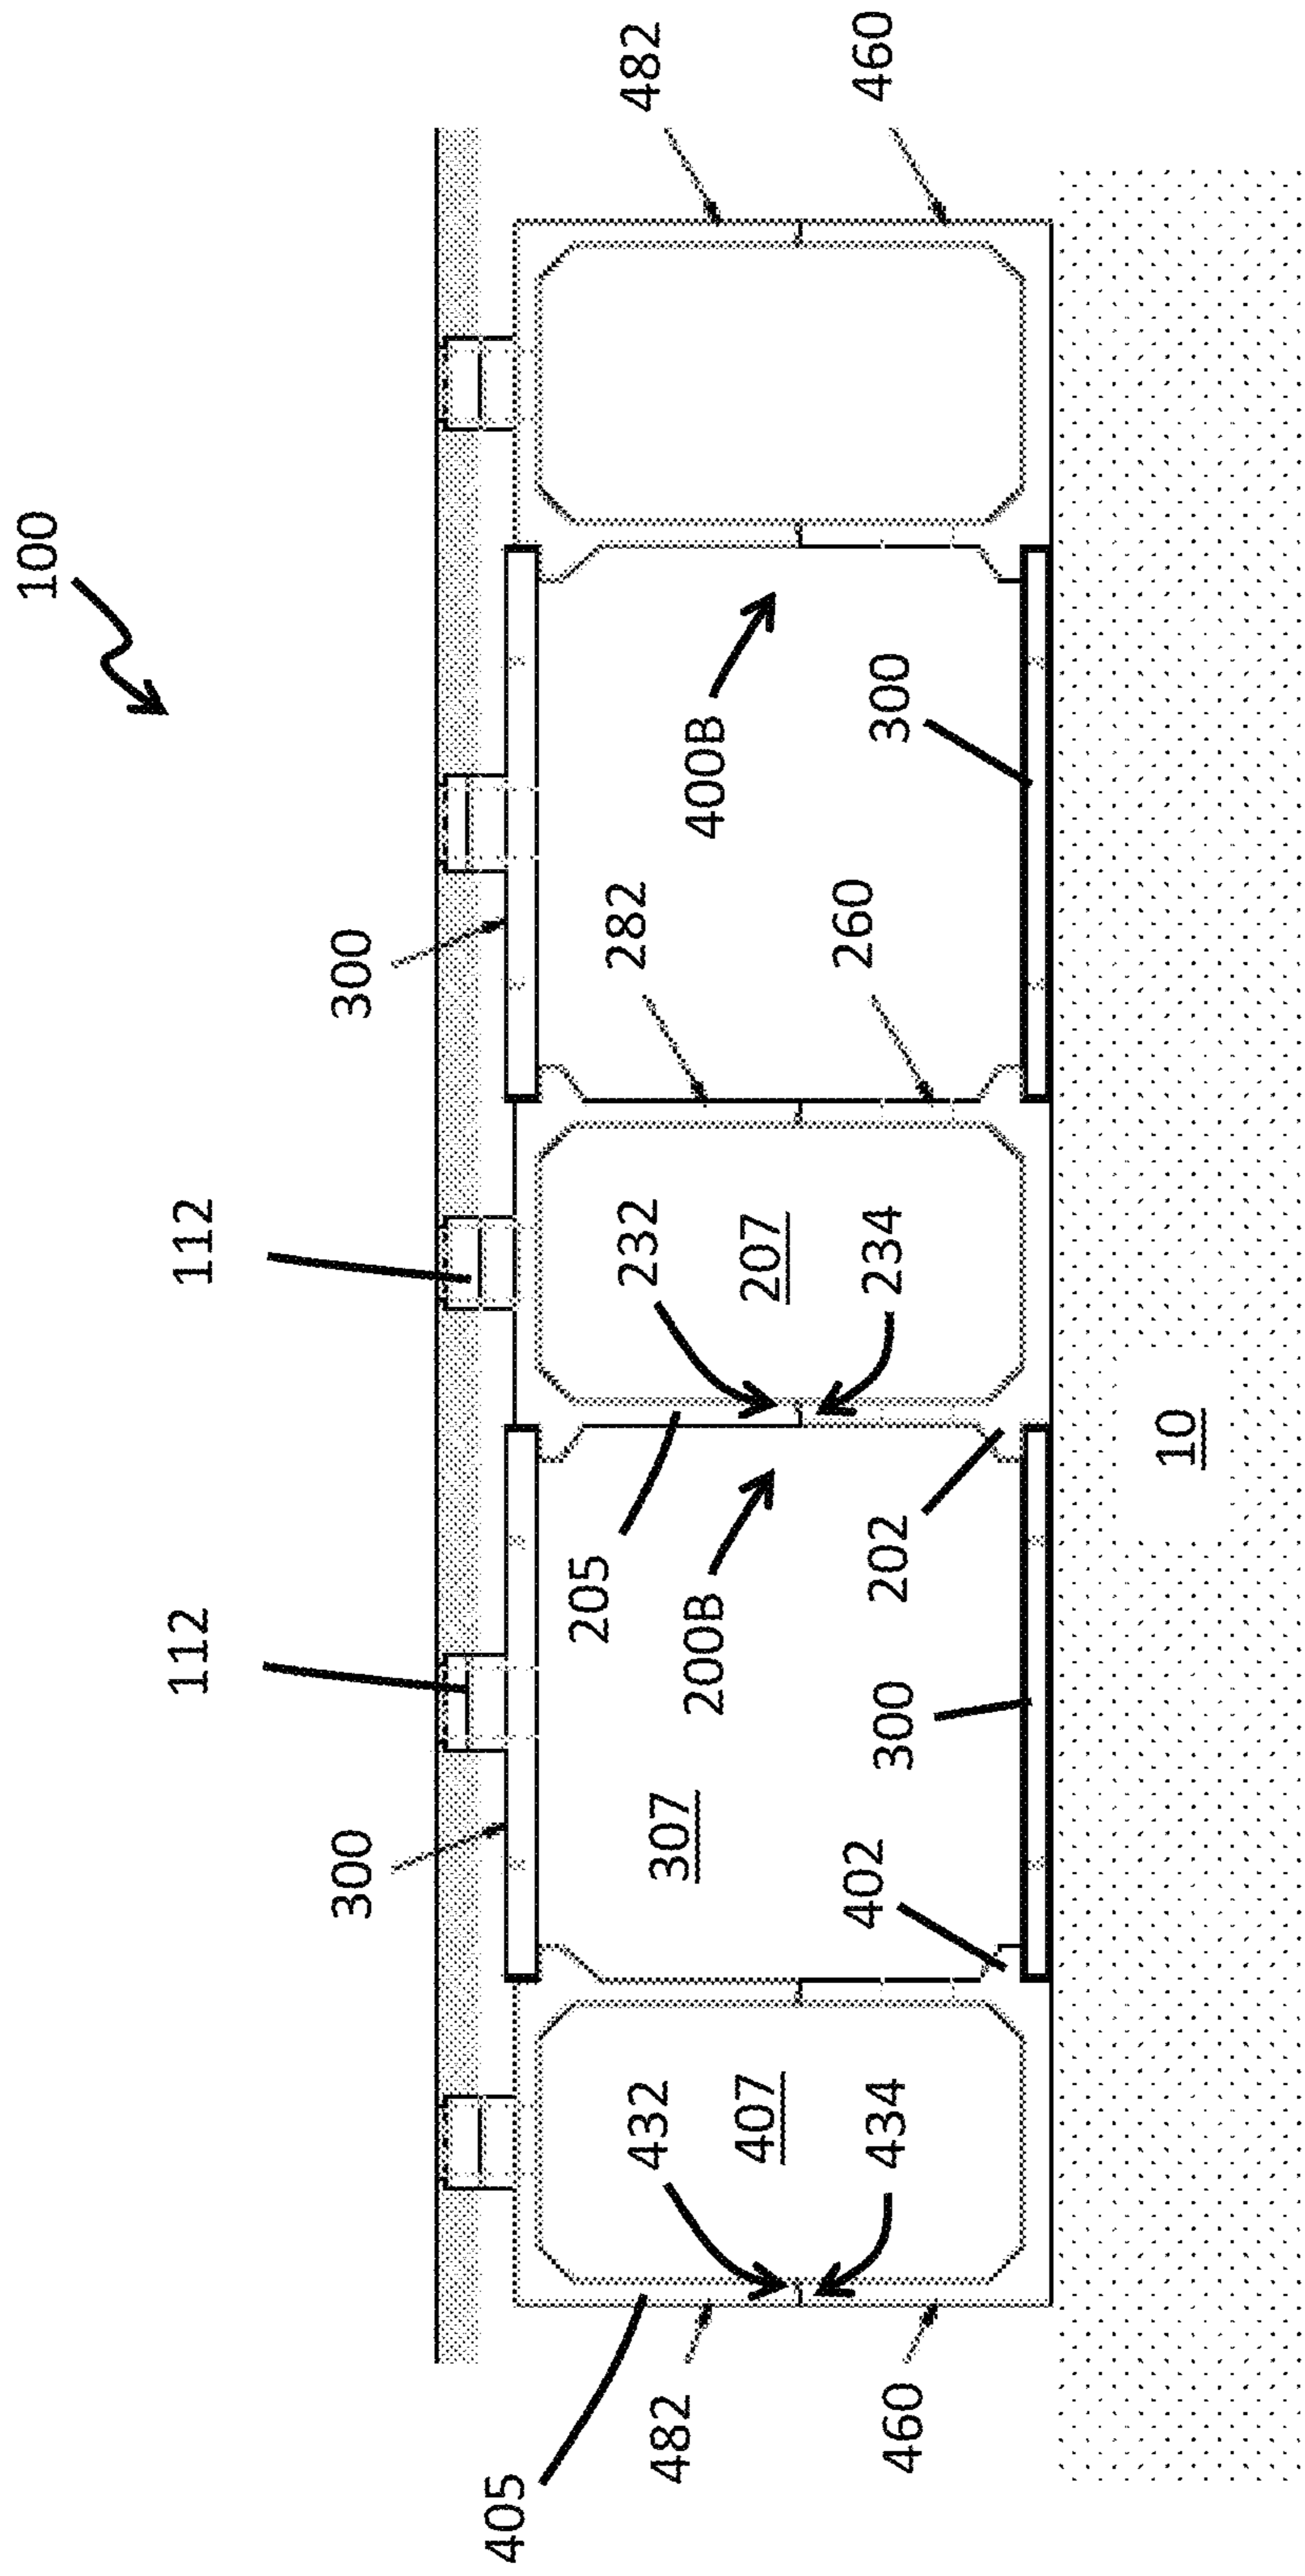


FIG. 36

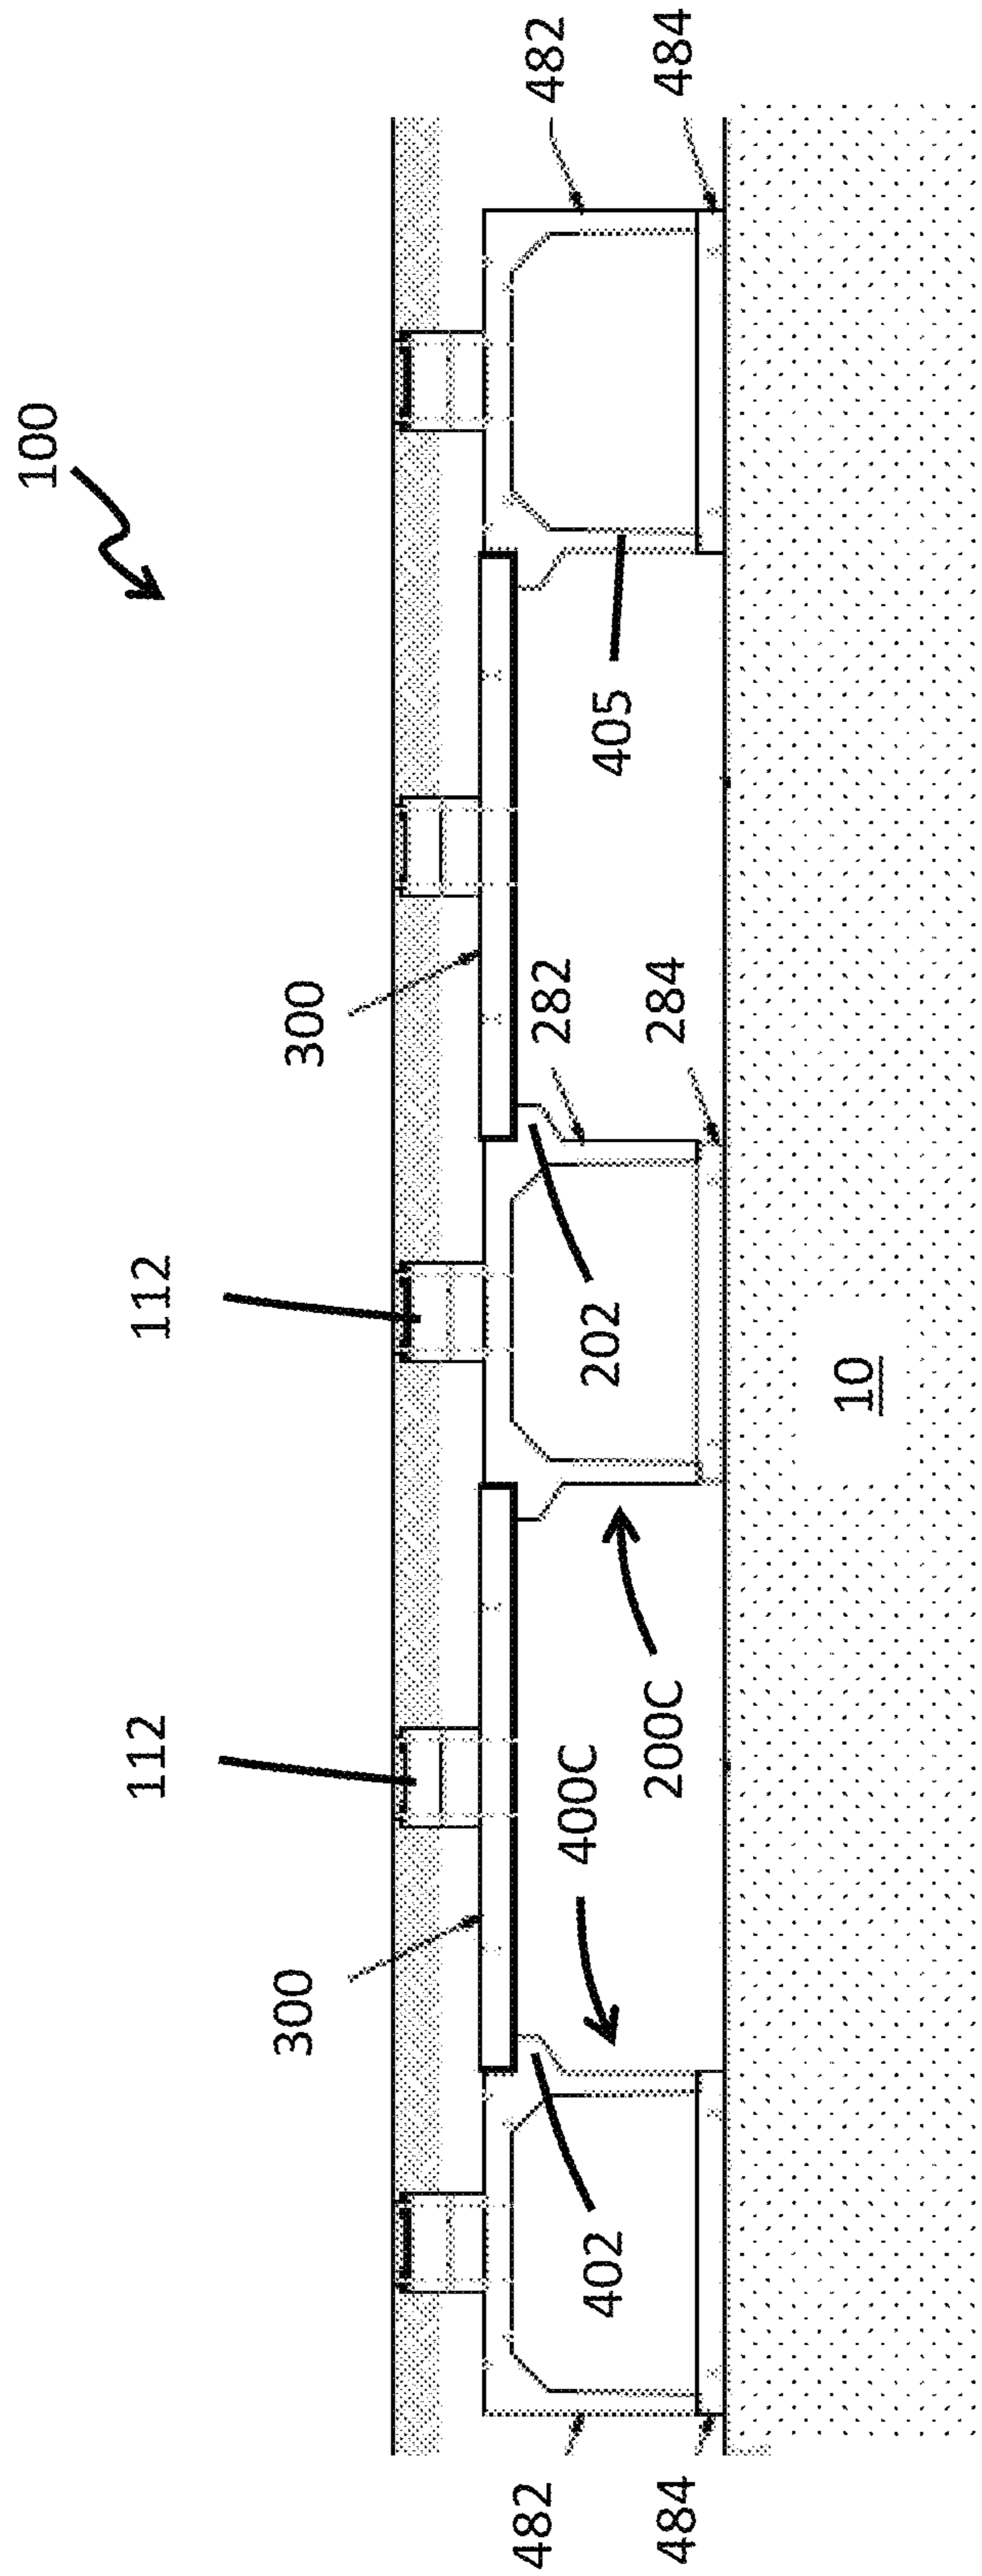


FIG. 37

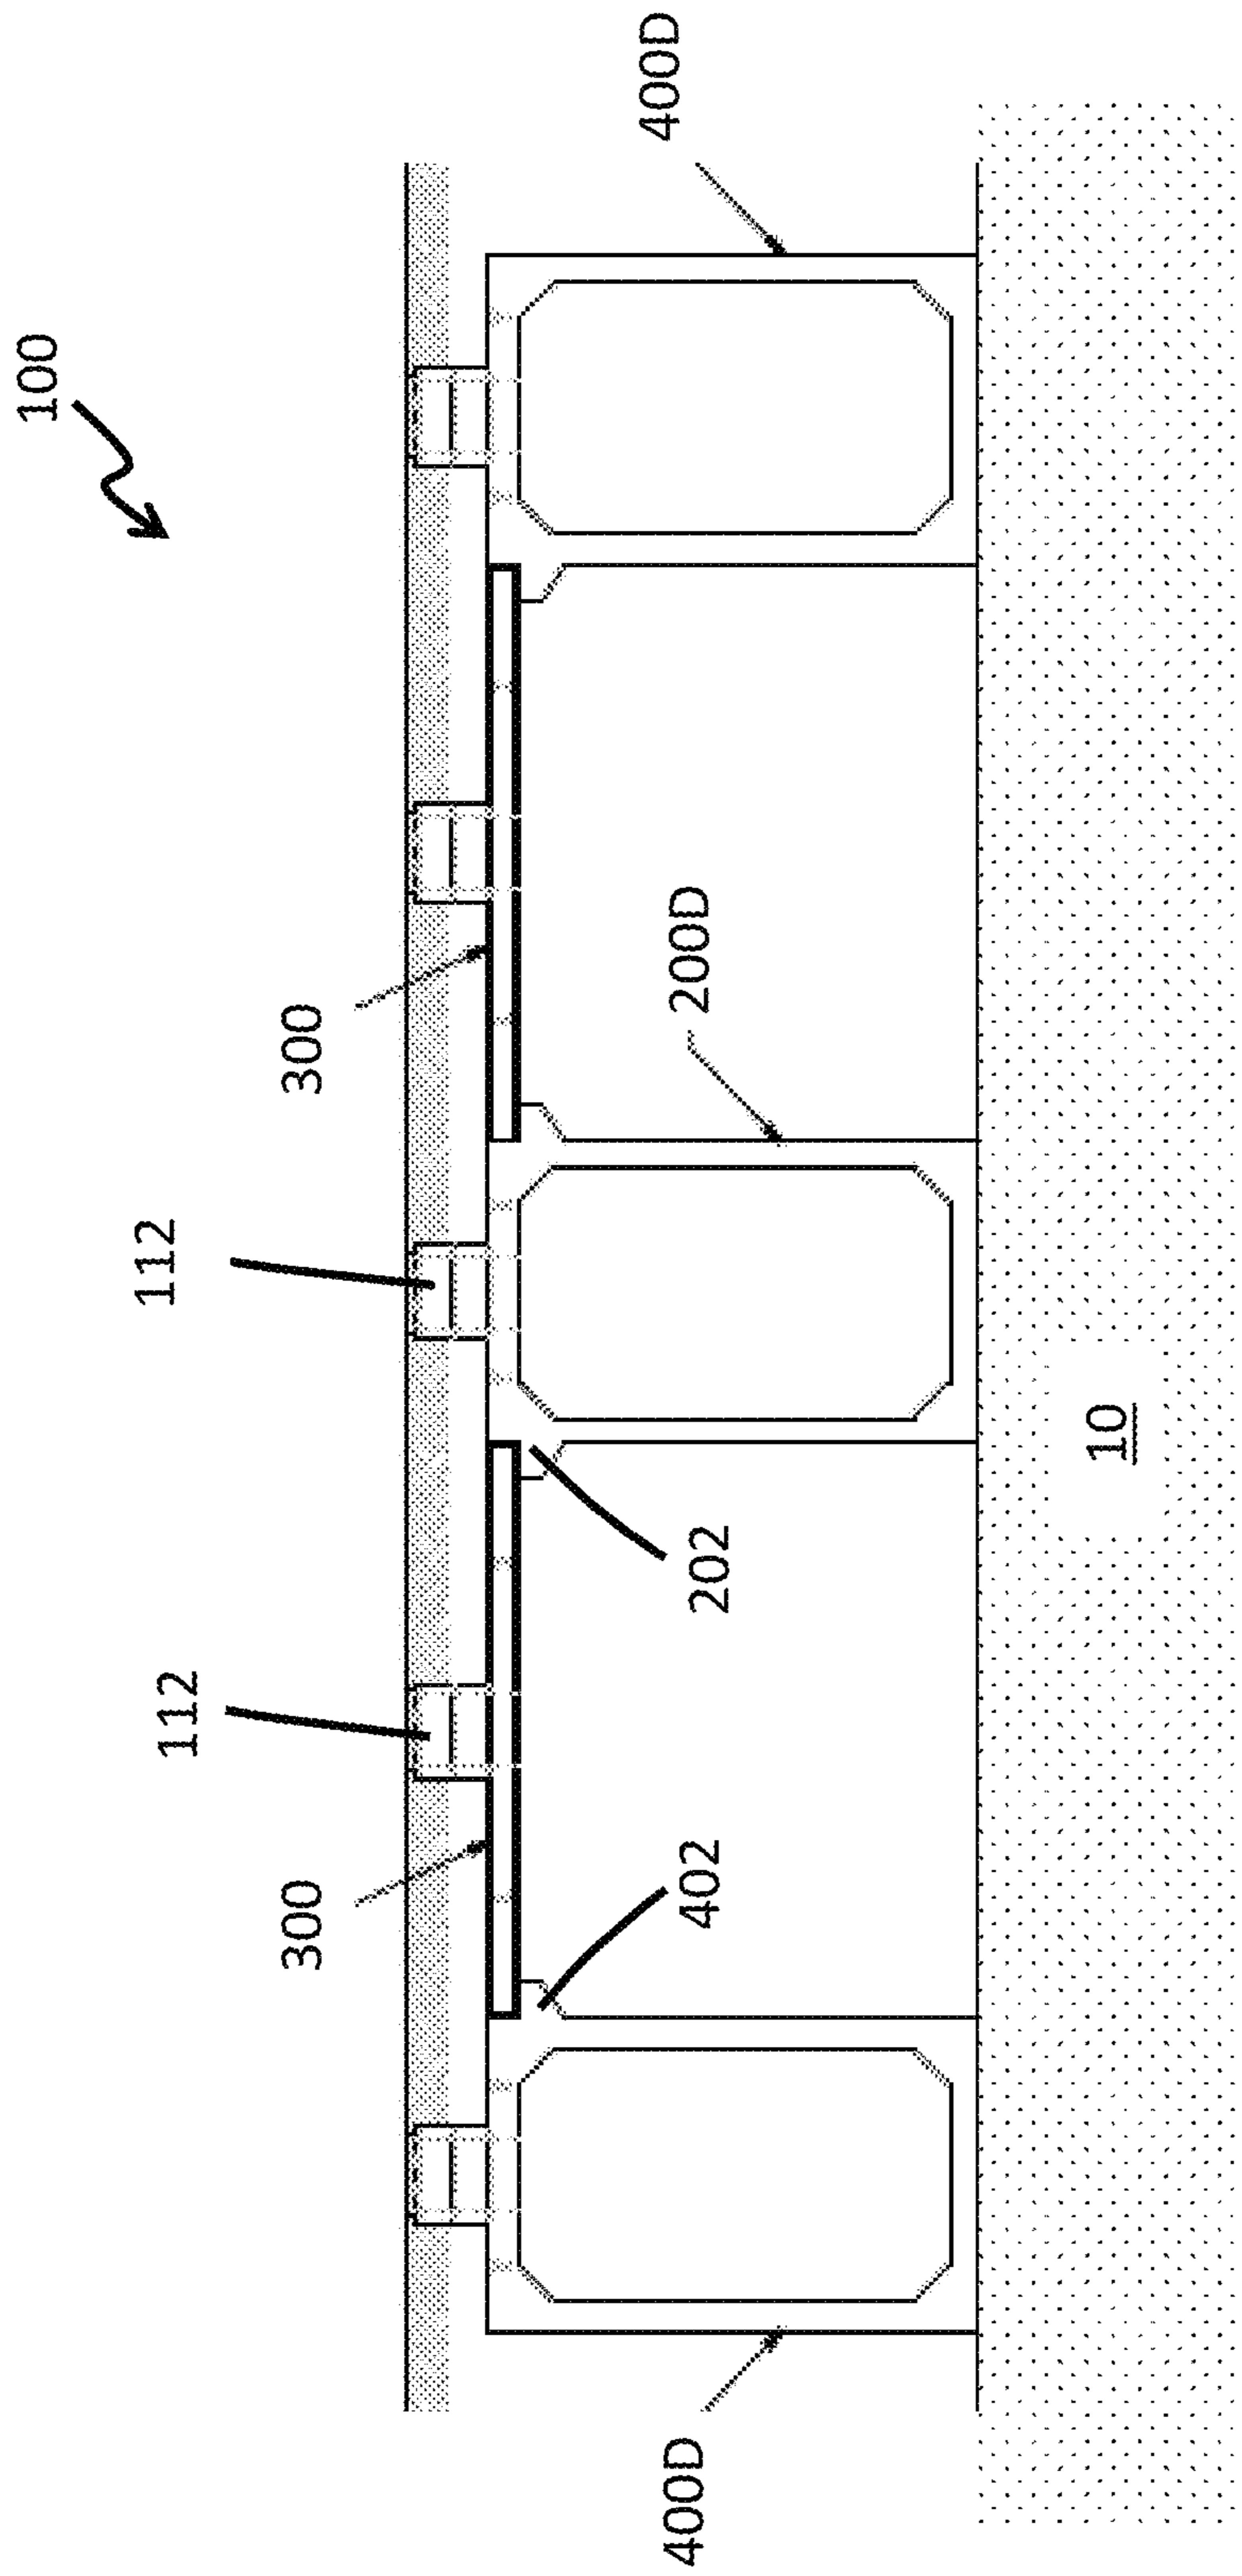


FIG. 38

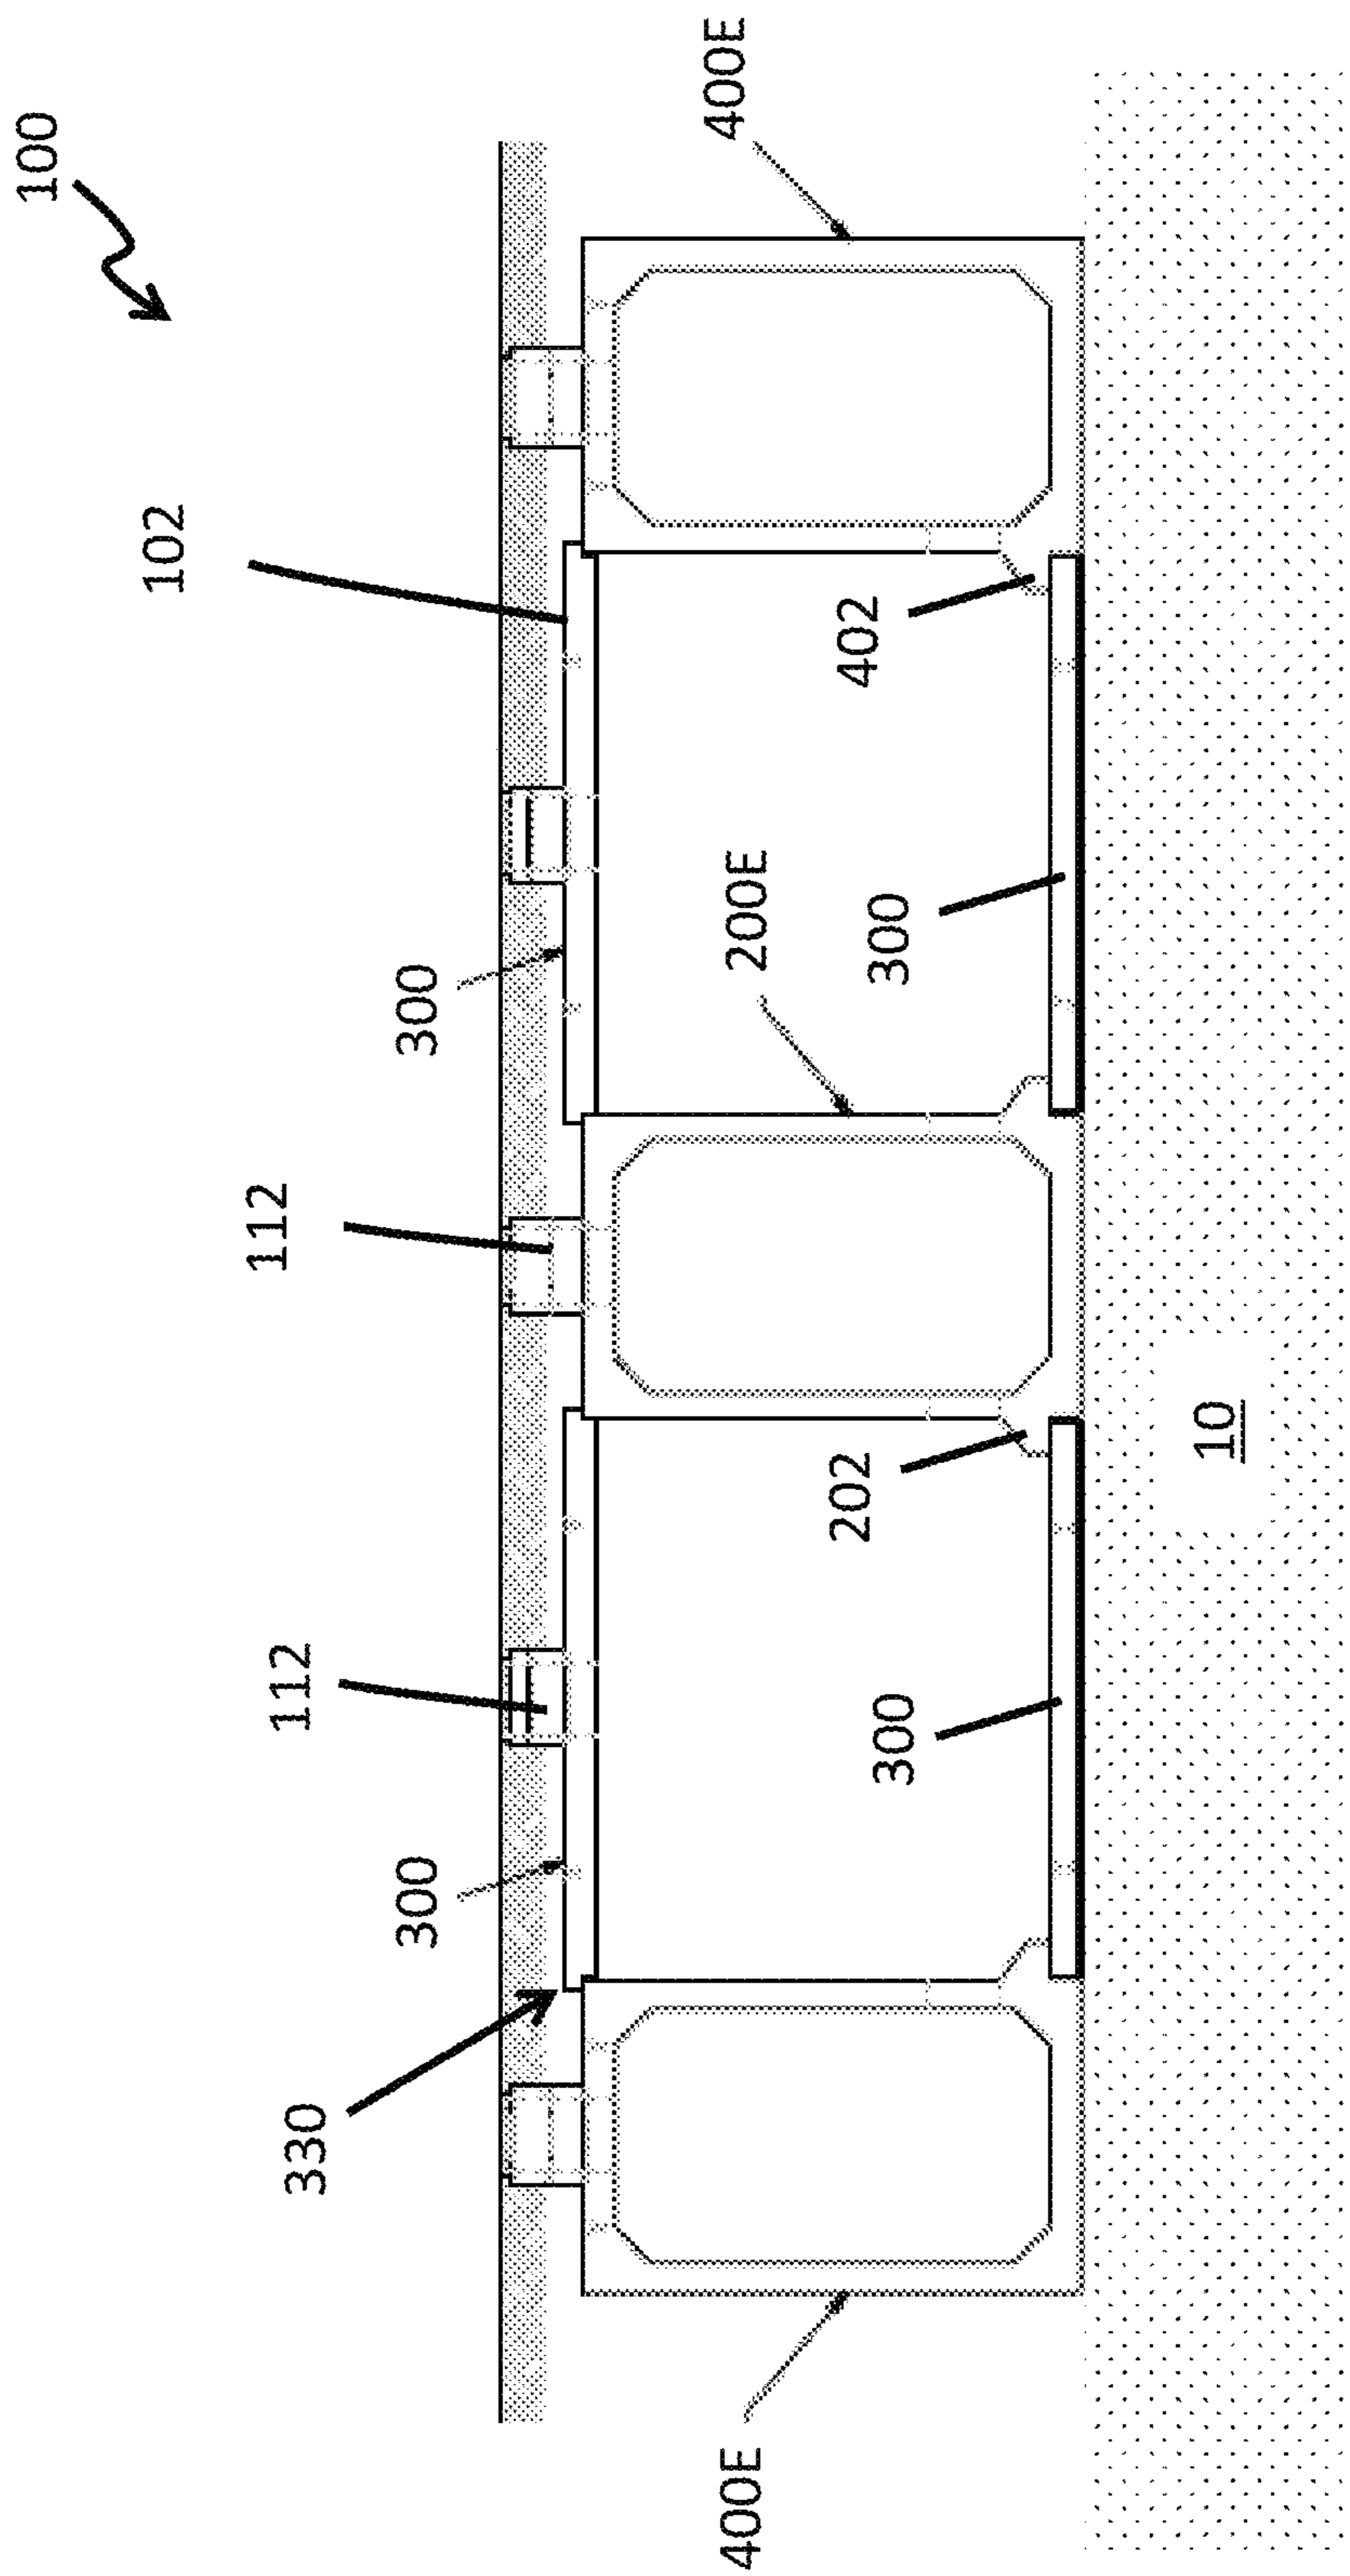


FIG. 39

1

**MODULAR STORM WATER MANAGEMENT
SYSTEMS AND METHODS OF ASSEMBLING
THE SAME**

INCORPORATION BY REFERENCE TO ANY
PRIORITY APPLICATIONS

This application is a continuation-in-part of U.S. patent application Ser. No. 16/027,128, filed Jul. 3, 2018, and entitled "MODULAR STORM WATER MANAGEMENT SYSTEMS AND METHODS OF ASSEMBLING THE SAME," and claims priority to U.S. Provisional Application No. 62/694,389, filed Jul. 5, 2018, and entitled "MODULAR STORM WATER MANAGEMENT SYSTEMS AND METHODS OF ASSEMBLING THE SAME," the disclosures of which are hereby incorporated by reference in their entirety.

BACKGROUND

Field

This disclosure relates generally to storm water management systems and methods of assembling storm water management systems.

Description of the Related Art

Urban development can replace a natural land surface (e.g., grassland) with a surface material (e.g., asphalt) that is impervious or less penetrable by water. The replacement of natural surfaces with surfaces that are less permeable to water can lead to problems associated with urban runoff. Urban runoff can cause surface water contamination to negatively impact receiving waters (e.g., beaches and bays). A need exists for managing storm water runoff from urban projects such as parking lots, streets, and other paved surfaces.

SUMMARY

Disclosed herein are embodiments of a method of constructing a storm water management system. In some aspects, the method includes positioning a first plurality of slabs end-to-end to form a first ribbon of slabs. The method further includes positioning a second plurality of slabs end-to-end to form a second ribbon of slabs, such that the first and second ribbons are aligned with one another and spaced apart to form a first opening between the first and second ribbons. The method further includes seating a first connecting column in the first opening such that a first bottom corbel extending from an outside surface of a first side wall of the first connecting column overlaps a first edge portion of the first ribbon and a second bottom corbel extending from an outside surface of a second side wall of the first connecting column overlaps a first edge portion of the second ribbon.

Also disclosed herein are embodiments of a modular storm water management system that includes a plurality of connecting columns and a plurality of slabs. Each of the plurality of connecting columns can include a base wall, a top wall, and a pair of opposing side walls that are spaced apart from one another and extend from the base wall to the top wall such that an interior space of the connecting column is surrounded by the base wall, the top wall, and the pair of opposing side walls. Each of the plurality of connecting columns can further include a first corbel, a second corbel,

2

a third corbel, and a fourth corbel. The first corbel extends from an outside surface of a first one of the pair of opposing side walls. The first corbel extends in a direction that is away from the interior space of the connecting column. The first corbel includes a shelf surface and an abutment surface. In use, the shelf surface of the first corbel faces toward an underlying surface that supports the storm water management system. The second corbel extends from the outside surface of the first one of the pair of opposing side walls. The second corbel includes a shelf surface and an abutment surface. The shelf surface of the second corbel faces away from the shelf surface of the first corbel. The third corbel extends from an outside surface of a second one of the pair of opposing side walls. The third corbel extends in a direction that is away from the interior space of the connecting column. The third corbel includes a shelf surface and an abutment surface. In use, the shelf surface of the third corbel faces toward an underlying surface that supports the storm water management system. The fourth corbel extends from the outside surface of the second one of the pair of opposing side walls. The fourth corbel includes a shelf surface and an abutment surface. The shelf surface of the fourth corbel faces away from the shelf surface of the third corbel. Each of the plurality of slabs has a generally planar shape and a slab thickness that corresponds to a height of an end surface of the slab. In use, the abutment surface of at least one of the first corbels is adjacent to and extends along at least a portion of the end surface of at least one of the plurality of slabs.

Also disclosed herein are embodiments of a modular storm water management system that includes a plurality of connecting columns, a plurality of slabs, and a plurality of other modular components (e.g., end columns) that can be arranged with one another to form a storm water management system that performs one or more functions or uses selected from the group consisting of retention, detention, infiltration, and conveyance. In some embodiments, the modular storm water management system can be arranged to perform only one of the uses of retention, detention, infiltration, and conveyance. In some embodiments, the modular storm water management system can be arranged to perform more than one of the uses of retention, detention, infiltration, and conveyance.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present disclosure will now be described hereinafter, by way of example only, with reference to the accompanying drawings in which:

FIG. 1 illustrates a perspective view of a storm water management system;

FIG. 2 illustrates a cross-sectional view of a portion of an assembled storm water management system;

FIG. 3A illustrates a perspective view of a connecting column;

FIG. 3B illustrates a top view of the connecting column of FIG. 3A;

FIG. 3C illustrates an end view of the connecting column of FIG. 3A;

FIG. 3D illustrates a side view of the connecting column of FIG. 3A;

FIG. 3E illustrates an end view of the top corbel of FIG. 3C;

FIG. 3F illustrates an end view of the bottom corbel of FIG. 3C;

FIG. 4A illustrates a top perspective view of a slab;

FIG. 4B illustrates a top view of the slab of FIG. 4A;

FIG. 4C illustrates an edge view of the slab of FIG. 4A;
FIG. 4D illustrates an end view of a corner portion of the slab of FIG. 4C;

FIG. 5A illustrates a slab seated on a top corbel of a connecting column;

FIG. 5B illustrates a slab nested with a bottom corbel of a connecting column;

FIG. 6A illustrates a perspective view of an end column;

FIG. 6B illustrates a top view of the end column of FIG. 6A;

FIG. 6C illustrates an end view of the end column of FIG. 6A;

FIG. 6D illustrates a side view of the end column of FIG. 6A;

FIG. 6E illustrates an opposing end view of the end column of FIG. 6C;

FIG. 6F illustrates an end view of the top corbel of FIG. 6C;

FIG. 6G illustrates an end view of the bottom corbel of FIG. 6C;

FIG. 7A illustrates a perspective view of an end column;

FIG. 7B illustrates a top view of the end column of FIG. 7A;

FIG. 7C illustrates a side view of the end column of FIG. 7A;

FIG. 7D illustrates an end view of an end column of FIG. 7A;

FIG. 7E illustrates an opposing side view of the end column of FIG. 7C;

FIG. 7F illustrates an opposing end view of the end column of FIG. 7D;

FIG. 7G illustrates an end view of the top corbel of FIG. 7D;

FIG. 7H illustrates an end view of the bottom corbel of FIG. 7D;

FIG. 8A illustrates a perspective view of an end column;

FIG. 8B illustrates a top view of the end column of FIG. 8A;

FIG. 8C illustrates a side view of the end column of FIG. 8A;

FIG. 8D illustrates an end view of an end column of FIG. 8A;

FIG. 8E illustrates an opposing side view of the end column of FIG. 8C;

FIG. 8F illustrates an opposing end view of the end column of FIG. 8D;

FIG. 8G illustrates an end view of the top corbel of FIG. 8D;

FIG. 8H illustrates an end view of the bottom corbel of FIG. 8D;

FIG. 9A illustrates a perspective view of an end column;

FIG. 9B illustrates a top view of the end column of FIG. 9A;

FIG. 9C illustrates a side view of the end column of FIG. 9A;

FIG. 9D illustrates an end view of an end column of FIG. 9A;

FIG. 9E illustrates an opposing side view of the end column of FIG. 9C;

FIG. 9F illustrates an end view of the top corbel of FIG. 9D;

FIG. 9G illustrates an end view of the bottom corbel of FIG. 9D;

FIG. 10A illustrates a perspective view of an end column;

FIG. 10B illustrates a top view of the end column of FIG. 10A;

FIG. 10C illustrates a side view of the end column of FIG. 10A;

FIG. 10D illustrates an end view of an end column of FIG. 10A;

FIG. 10E illustrates an opposing side view of the end column of FIG. 10C;

FIG. 10F illustrates an end view of the top corbel of FIG. 10D;

FIG. 10G illustrates an end view of the bottom corbel of FIG. 10D;

FIG. 11A illustrates a perspective view of an end column;

FIG. 11B illustrates a top view of the end column of FIG. 11A;

FIG. 11C illustrates an end view of an end column of FIG. 11A;

FIG. 11D illustrates a side view of an end column of FIG. 11A;

FIG. 11E illustrates an opposing end view of the end column of FIG. 11C;

FIG. 11F illustrates an end view of a top corner of the end column of FIG. 11C;

FIG. 11G illustrates an end view of the bottom corner of the end column of FIG. 11C;

FIG. 12A illustrates a perspective view of an access module;

FIG. 12B illustrates a top view of the access module of FIG. 12A;

FIG. 12C illustrates an end view of the access module of FIG. 12A;

FIG. 12D illustrates a side view of the access module of FIG. 12A;

FIG. 12E illustrates an opposing end view of the access module of FIG. 12C;

FIG. 12F illustrates an end view of a top corner of the access module of FIG. 12C;

FIG. 12G illustrates an end view of the bottom corner of the access module of FIG. 12C;

FIG. 13A illustrates a perspective view of a left-notched module;

FIG. 13B illustrates a top view of the left-notched module of FIG. 13A;

FIG. 13C illustrates an end view of the left-notched module of FIG. 13A;

FIG. 13D illustrates a side view of the left-notched module of FIG. 13A;

FIG. 13E illustrates an opposing end view of the left-notched module of FIG. 13C;

FIG. 13F illustrates an end view of a top corner of the left-notched module of FIG. 13C;

FIG. 13G illustrates an end view of the bottom corner of the left-notched module of FIG. 13C;

FIG. 14A illustrates a perspective view of a right-notched module;

FIG. 14B illustrates a top view of the right-notched module of FIG. 14A;

FIG. 14C illustrates an end view of the right-notched module of FIG. 14A;

FIG. 14D illustrates a side view of the right-notched module of FIG. 14A;

FIG. 14E illustrates an opposing end view of the right-notched module of FIG. 14C;

FIG. 14F illustrates an end view of a top corner of the right-notched module of FIG. 14C;

FIG. 14G illustrates an end view of the bottom corner of the right-notched module of FIG. 14C;

FIG. 15A illustrates a perspective view of a dead-end module;

5

FIG. 15B illustrates a top view of the dead-end module of FIG. 15A;

FIG. 15C illustrates an end view of the dead-end module of FIG. 15A;

FIG. 15D illustrates a side view of the dead-end module of FIG. 15A;

FIG. 15E illustrates an opposing end view of the dead-end module of FIG. 15C;

FIG. 15F illustrates an end view of a top corner of the dead-end module of FIG. 15C;

FIG. 15G illustrates an end view of the bottom corner of the dead-end module of FIG. 15C;

FIG. 16A illustrates a perspective view of an open-ended module;

FIG. 16B illustrates a top view of the open-ended module of FIG. 16A;

FIG. 16C illustrates an end view of the open-ended module of FIG. 16A;

FIG. 16D illustrates a side view of the open-ended module of FIG. 16A;

FIG. 16E illustrates an opposing end view of the open-ended module of FIG. 16C;

FIG. 16F illustrates a cross-sectional view of the open-ended module of FIG. 16B;

FIG. 16G illustrates an end view of a top corner of the open-ended module of FIG. 16C;

FIG. 16H illustrates an end view of the bottom corner of the open-ended module of FIG. 16C;

FIG. 17A illustrates a perspective view of a wrapped-seam end module;

FIG. 17B illustrates a top view of the wrapped-seam end module of FIG. 17A;

FIG. 17C illustrates an end view of the wrapped-seam end module of FIG. 17A;

FIG. 17D illustrates a side view of the wrapped-seam end module of FIG. 17A;

FIG. 17E illustrates a cross-sectional view of the wrapped-seam end module of FIG. 17B;

FIG. 17F illustrates an end view of a top corner of the wrapped-seam end module of FIG. 17C;

FIG. 17G illustrates an end view of the bottom corner of the wrapped-seam end module of FIG. 17C;

FIG. 18A illustrates a perspective view of a spacer module;

FIG. 18B illustrates a top view of the spacer module of FIG. 18A;

FIG. 18C illustrates an end view of the spacer module of FIG. 18A;

FIG. 18D illustrates a side view of the spacer module of FIG. 18A;

FIG. 18E illustrates an opposing end view of the spacer module of FIG. 18C;

FIG. 18F illustrates an end view of a top corner of the spacer module of FIG. 18C;

FIG. 18G illustrates an end view of the bottom corner of the spacer module of FIG. 18C;

FIG. 19A illustrates a perspective view of a communicating spacer module;

FIG. 19B illustrates a top view of the communicating spacer module of FIG. 19A;

FIG. 19C illustrates an end view of the communicating spacer module of FIG. 19A;

FIG. 19D illustrates a side view of the communicating spacer module of FIG. 19A;

FIG. 19E illustrates an opposing end view of the communicating spacer module of FIG. 19C;

6

FIG. 19F illustrates an end view of a top corner of the communicating spacer module of FIG. 19C;

FIG. 19G illustrates an end view of the bottom corner of the communicating spacer module of FIG. 19C;

FIG. 20A illustrates a perspective view of a spacer module;

FIG. 20B illustrates a top view of the spacer module of FIG. 20A;

FIG. 20C illustrates an end view of the spacer module of FIG. 20A;

FIG. 20D illustrates a side view of the spacer module of FIG. 20A;

FIG. 20E illustrates an opposing end view of the spacer module of FIG. 20C;

FIG. 20F illustrates an end view of a top corner of the spacer module of FIG. 20C;

FIG. 20G illustrates an end view of the bottom corner of the spacer module of FIG. 20C;

FIG. 21A illustrates a perspective view of a multi-seamed spacer module;

FIG. 21B illustrates a top view of the multi-seamed spacer module of FIG. 21A;

FIG. 21C illustrates an end view of the multi-seamed spacer module of FIG. 21A;

FIG. 21D illustrates a side view of the multi-seamed spacer module of FIG. 21A;

FIG. 21E illustrates an opposing end view of the multi-seamed spacer module of FIG. 21C;

FIG. 21F illustrates an end view of a top corner of the multi-seamed spacer module of FIG. 21C;

FIG. 21G illustrates an end view of the bottom corner of the multi-seamed spacer module of FIG. 21C;

FIG. 22A illustrates a perspective view of a communicating wrapped-seam end module;

FIG. 22B illustrates an opposing perspective view of the communicating wrapped-seam end module of FIG. 22A;

FIG. 22C illustrates a top view of the multi-seamed spacer module of FIG. 22A;

FIG. 22D illustrates an end view of the multi-seamed spacer module of FIG. 22A;

FIG. 22E illustrates a side view of the multi-seamed spacer module of FIG. 22A;

FIG. 22F illustrates an opposing end view of the multi-seamed spacer module of FIG. 22D;

FIG. 22G illustrates an end view of a top corner of the multi-seamed spacer module of FIG. 22D;

FIG. 22H illustrates an end view of the bottom corner of the multi-seamed spacer module of FIG. 22D;

FIG. 23A illustrates a perspective view of a communicating multi-seamed spacer module;

FIG. 23B illustrates a top view of the communicating multi-seamed spacer module of FIG. 23A;

FIG. 23C illustrates an end view of the communicating multi-seamed spacer module of FIG. 23A;

FIG. 23D illustrates a side view of the communicating multi-seamed spacer module of FIG. 23A;

FIG. 23E illustrates an opposing end view of the communicating multi-seamed spacer module of FIG. 23C;

FIG. 23F illustrates an end view of a top corner of the communicating multi-seamed spacer module of FIG. 23C;

FIG. 23G illustrates an end view of the bottom corner of the communicating multi-seamed spacer module of FIG. 23C;

FIG. 24 illustrates a schematic diagram of a flow path through the storm water management system;

FIG. 25 illustrates a top view of a storm water management system;

FIG. 26 illustrates a schematic diagram of a storm water management system configured for retention;

FIG. 27 illustrates a schematic diagram of a storm water management system configured for detention;

FIG. 28 illustrates a schematic diagram of a storm water management system configured for infiltration;

FIG. 29 illustrates a schematic diagram of a storm water management system configured for conveyance.

FIG. 30 illustrates a flow chart of a method of assembling a storm water management system.

FIG. 31A illustrates a storm water management system configured for retention.

FIGS. 31B-31E illustrate different modules of a storm water management system.

FIG. 32A illustrates a storm water management system configured for detention.

FIGS. 32B-32C illustrate different modules of a storm water management system.

FIG. 33A illustrates a storm water management system configured for conveyance.

FIGS. 33B-33C illustrate different modules of a storm water management system.

FIG. 34A illustrates a storm water management system configured for infiltration.

FIG. 34B illustrates a storm water management system configured for infiltration.

FIG. 35 illustrates a side cross-sectional view of a storm water management system.

FIG. 36 illustrates a side cross-sectional view of a storm water management system.

FIG. 37 illustrates a side cross-sectional view of a storm water management system.

FIG. 38 illustrates a side cross-sectional view of a storm water management system.

FIG. 39 illustrates a side cross-sectional view of a storm water management system.

DETAILED DESCRIPTION

Overview

Storm water management systems disclosed herein can mitigate problems associated with urban runoff by replicating or approximating one or more features of a natural surface. For example, in some aspects the storm water management systems disclosed herein can perform a retention function in which storm water is collected and held to be pumped out or removed from the system at a later time. In some aspects, the storm water management systems disclosed herein can perform a detention function in which storm water is detained in the system and then released slowly into a pipe or waterway. The detention use or feature of the storm water management system disclosed herein can allow storm water to enter the system at a volumetric flow rate that is higher than the rate of release of the collected water from the storm water management system. In some arrangements, the storm water management systems disclosed herein can perform a conveyance function in which storm water (or other flowing water) is moved from one location to another location. For example, the storm water management system can be arranged to provide a flow path underneath and across a paved surface. In some embodiments, the storm water management system can have an infiltration use or function in which storm water is slowly allowed to infiltrate out of the system and into the soil that is underneath or adjacent to the system. In some arrangements, the storm water management systems disclosed

herein can perform one or more of the functions or uses of retention, detention, conveyance, and infiltration.

Accordingly, disclosed herein are embodiments of modular storm water management systems, and methods of installation and use of the storm water management systems. The embodiments disclosed herein can be described in the context of an assembly comprised of a plurality of concrete open columns and slabs that are installed underneath a paved surface. However, the embodiments and inventions herein can also be applied to other types of environments, and comprised of materials other than concrete, and the particular structures and materials do not limit the disclosure.

Modular Storm Water Management System

FIG. 1 illustrates a perspective view of a storm water management system 100 of the present disclosure. The storm water management system 100 can be assembled and buried underground beneath a paved surface or other urban project that is constructed on top of the storm water management system 100 after the system 100 has been assembled and buried underground. The storm water management system 100 can be arranged as a network or array of open connecting columns 200 and slabs 300. In the embodiment shown in FIG. 1, the storm water management system 100 is arranged as an array of alternating rows of open connecting columns 200 and slabs 300. The connecting columns 200 and slabs 300 can form a deck 102 on which a paved surface is supported. In some embodiments, a paved surface is installed over the storm water management system 100 after the assembled storm water management system 100 has been buried underground. As discussed herein, the connecting columns 200 and slabs 300 can form a floor 104. The floor 104 can be interposed between the deck 102 and the underlying surface that supports the storm water management system 100. In some arrangements, the floor 104 of the storm water management system 100 can be in direct contact with the underlying surface that supports the storm water management system 100.

With continued reference to FIG. 1, the storm water management system 100 can include an outlet opening 106 through which water contained within the storm water management system 100 can exit the storm water management system 100. An outlet pipe 117 (shown in FIG. 26) can pass through the outlet opening 106 to provide a flow path between the storm water management system 100 and a downstream plumbing system (shown in FIG. 24). The storm water management system 100 can include an inlet opening 110 through which water outside of the storm water management system 100 can enter the storm water management system 100. An inlet pipe 116 (shown in FIG. 25) can pass through the inlet opening 110 to provide a flow path between an upstream plumbing system (shown in FIG. 24) and the storm water management system 100. As discussed herein, the storm water management system 100 can include one or more access ports 112. The access port 112 can be sized to allow a person to pass through the access port 112 to gain access to the space between the deck 102 and the floor 104 of the storm water management system 100.

FIG. 2 illustrates a cross-sectional view of a portion of a storm water management system 100. The storm water management system 100 can include modules such as open connecting columns 200, slabs 300, and end columns 400. The storm water management system 100 can be arranged to form a network of interconnected spaces as described herein. The storm water management system 100 can be arranged to function like an underground lake, allowing water to be distributed across the internal space enclosed by the storm water management system 100. The modules of the storm

water management system **100** can be arranged in a variety of different configurations depending on the desired footprint or use (e.g., conveyance, retention, detention, infiltration) of the storm water management system **100**.

The connecting columns **200** can have a base wall **201**, a top wall **203**, and a pair of opposing sidewalls **205** that connect the base wall **201** and the top wall **203**. When the modular storm water management system **100** is assembled, the base wall **201** is adjacent the underlying surface **10**. When the modular storm water management system **100** is assembled, the base wall **201** is interposed between the top wall **203** and the underlying surface **10**. The end column **400** can have similar corresponding structures, as indicated in FIG. 2. For the sake of clarity, corresponding features of different modules described herein will be indicated using corresponding reference numbers. For example, the end column **400** can have a base wall **401** that is similar to the base wall **201** of the connecting column **200**, except as differently described herein.

The connecting columns **200** can include corbels **202** that extend from the sidewalls **205**. The corbels **202** extend from the surface of the sidewall **205** that faces away from the interior space of the connecting column **200**. The corbels **202** are disposed on the surface of the sidewall **205** that faces away from the opposing sidewall **205** of the connecting column **200**. The corbels **202** support or nest onto the slabs **300**, as shown in FIG. 2. The corbels **202** near the base wall **201** of the column **200** nest over the slabs **300** that are adjacent the underlying surface **10**. The corbels **202** near the base wall **201** nest over the slabs **300** of the floor **104**. The corbels **202** near the top wall **203** support the slabs **300** of the deck **102**. The slabs **300** of the deck **102** are spaced apart from the slabs **300** of the floor **104** by the sidewalls **205**, as shown in FIG. 2.

The connecting columns **200** can have an open structure. The base wall **201**, top wall **203**, and sidewalls **205** can surround an interior space **207** of the connecting columns **200**. The connecting columns **200** can form a duct when positioned appropriately with other connecting columns **200**. For example, the connecting columns **200** shown in FIG. 2 would form a rectangular duct structure when the connecting columns **200** are aligned end-to-end with one another such that the interior space **207** of each of the connecting columns **200** is aligned with the interior spaces **207** of the other connecting columns **200**. The two connecting columns **200** shown in FIG. 2 are not aligned end-to-end with one another. The two connecting columns **200** shown in FIG. 2 would form two parallel rectangular ducts if each of these two connecting columns **200** were aligned end-to-end with other connecting columns **200**. The end columns **400** can form similar duct-like structures.

The ducts formed by the connecting columns **200** can help distribute water within the modular storm water management system **100**. For example, a duct formed by a plurality of connecting columns **200** arranged end-to-end can distribute water along the length of the duct. The connecting columns **200** can include one or more connecting-column ports **220** that provide a flow path across the side wall **205**. The connecting-column ports **220** can help distribute water across the duct-like structure of the end-to-end aligned connecting columns **200**, thereby allowing such distributed water to reach adjacent regions of the storm water management system **100** that are covered by the slabs **300**. Water within the storm water management system **100** can be distributed throughout the system **100** by flowing along the duct-like structures of the connecting columns **200** and slabs **300** and flowing between these duct-like structures by

flowing through the connecting-column ports **220**. In the illustrated embodiment, the connecting column **200** includes a pair of connecting-column ports **220** that are similar in size to one another and disposed across from one another on the opposing side walls **205**. The illustrated connecting-column ports **220** are positioned adjacent the corbel **202** near the base wall **201**. In some embodiments, the connecting-column port **220** can be sized or positioned at a location other than that illustrated in FIG. 2, as discussed herein.

As shown in FIG. 2, the end column **400** can include an end-column port **420** that provides a flow path across a side wall **405** of the end column **400**. The end-column port **420** can help distribute water within the storm water management system **100**, as described herein. In the illustrated embodiment, the end-column port **420** passes through the side wall **405** from which the corbel **402** extends and is positioned adjacent the corbel **402** that is near the floor **104** of the storm water management system **100**. The illustrated end-column port **420** is also similar in size to the connecting-column ports **220**, and is axially aligned with the connecting-column ports **220**. In some embodiments, the end-column port **420** can be positioned at a location other than that illustrated in FIG. 2, as discussed herein. In some embodiments, there is desirably no corbel on the outer side wall **405** of the end column **400**, as shown in FIG. 2. In some embodiments, the outer side wall **405** of the end column **400** can include a corbel.

With continued reference to FIG. 2, the slabs **300** can have an inner surface **301** that faces toward the enclosed space of the storm water management system **100** and an outer surface **303** that faces away from the enclosed space of the storm water management system **100**. The slabs can have end surfaces **305** that face toward the connecting columns **202** (or end columns **402**) when the slab **300** is seated onto or nested with the corbels **202**, **402**. The slabs **300** can have side surfaces **309** (shown in FIGS. 4A and 4B) that connect the inner surface **301** with the outer surface **303**, and the end surfaces **305** with one another.

The storm water management system **100** can be assembled by positioning the modules relative to one another, as discussed herein. The system **100** modules can be selected and arranged according to the desired function(s) (e.g., retention, detention, conveyance, infiltration) of the storm water management system **100**. The system **100** modules can be selected and arranged according to the desired footprint of the storm water management system **100**. Referring to FIG. 2, the storm water management system **100** can be assembled by positioning a first slab **300a** and a second slab **300b** on the underlying surface **10** such that the first and second slabs **300a**, **300b** are spaced apart from one another with the outer surface **303** of the first and second slabs **300a**, **300b** facing toward the underlying surface **10**. A first connecting column **200a** can be seated into an open space formed between the first and second slabs **300a**, **300b** such that the corbels **202** of the first connecting column **200a** nest over a portion of the inner surface **301** that is adjacent the end surfaces **305** of the first and second slabs **300a**, **300b**. A sealant can be applied at the interface between adjacent columns **200** and slabs **300**. The sealant can be used between any adjacent modules of the system **100**. In some embodiments, the sealant impedes or blocks water flow between adjacent columns **200** and slabs **300** or other adjacent modules of the system **100**. In some embodiment, the sealant can provide structural reinforcement to impede the adjacent modules from moving relative to one another. In some embodiments, the columns **200** can include overlapping portions such as disclosed in U.S. Pat. No. 8,708,

601, entitled "BOX CULVERT," which issued Apr. 29, 2014, and is incorporated by reference herein in its entirety.

The assembly of storm water management system **100** can be extended over the underlying surface **10** by positioning a third slab **300c** on the underlying surface **10** and spaced apart from the second slab **300b**. A second connecting column **200b** can be seated into the open space between the second and third slabs **300b**, **300c**. This process can be repeated to continue extending the assembly of the system **100** over the underlying surface **10**. The system **100** can be extended and assembled to have a desired footprint, such as to match a corresponding urban project (e.g., paved surface) that will be installed over the system **100**.

The storm water management system **100** can be bounded or surrounded at its periphery by one or more end column **400** modules or other modules, as discussed herein. As shown in FIG. 2, an end column **400** can be positioned adjacent to the first slab **300a**. The corbel **402** of the end column **400** can nest over a portion of the inner surface **301** that is adjacent the end surfaces **305** of the first slabs **300a**. The storm water management system **100** can be covered or enclosed by positioning slabs **300** on the corbels **202**, **402** that are opposite the corbels **202**, **402** that are nested over the slabs **300** on the underlying surface **10**. The storm water management system **100** can be enclosed by positioning slabs **300** onto the corbels **202**, **402** near the deck **102** such that a portion of the inner surface **301** that is adjacent the end surface **305** rests on the corbel **202**, **402**, as shown in FIG. 2.

For the sake of clarity, the slabs **300** in contact with the underlying surface **10** are referred to herein as the "bottom" slabs **300**, while the slabs **300** at the opposite side of the storm water management system **100** are referred to herein as the "top" slabs **300**. Similarly, corbels **202**, **402** that are nested over the bottom slabs **300** are referred to as "bottom" corbels, while corbels **202**, **402** that support the top slabs **300** are referred to as "top" corbels.

FIG. 3A shows an isometric view of a connecting column **200** of the storm water management system **100**. The illustrated connecting column **200** has four corbels **202**, with each side of the column having a top corbel **202** and a bottom corbel **202**. The connecting column **200** can have two column ports **220** disposed on opposing side walls **205** of the connecting column **200**. In the illustrated embodiment, the connecting column **200** has a pair of similarly-sized column ports **220** that are disposed near the bottom corbels **202**. The column ports **220** can be aligned axially with one another, as shown in the side view of the connecting column **200** in FIG. 3D. The connecting column **200** can have four anchor pins **204** at the top end of the connecting column **200**. The anchor pins **204** can provide anchoring points for moving, hauling, lifting, or otherwise positioning the connecting column **200**. The connecting column **200** can include a seam **206**. The seam **206** can be a groove. The seam **206** can be used to join or seal adjacent modules to one another.

FIG. 3B shows a top view of the connecting column **200** shown in FIG. 3A. FIG. 3C shows an end view of the connecting column **200** shown in FIG. 3A. FIG. 3D shows a side view of the connecting column **200** shown in FIG. 3A. FIG. 3E shows an end view of a top corbel **202** of the connecting column **200** shown in FIG. 3A. FIG. 3F shows an end view of a bottom corbel **202** of the connecting column **200** shown in FIG. 3A. For the sake of clarity, the surface of the top corbel **202** that supports the slab **300** against gravity when the slab **300** is seated onto the top corbel **202** is referred to herein as the shelf surface **210**, as

indicated in FIG. 3E. Similarly, the surface of the bottom corbel **202** that rests on the bottom slab **300** when the connecting column **200** is seated into the open space between adjacent and spaced apart slabs **300** is referred to herein as a shelf surface **210**, as indicated in FIG. 3F. With continued reference to FIGS. 3E and 3F, the corbel **210** can have an abutment surface **212** that can be more or less orthogonal to the shelf surface **210**. The shelf and abutment surfaces **210**, **212** of the corbels **202** can form a notch **214**. The notch **214** can be sized to receive at least a portion of an edge of the slab **300**, as discussed herein. In some aspects, the shelf surface **210** can help transmit a load acting transverse on the deck **102** to the underlying surface **10** on which the storm water management system **100** is installed. In some aspects, the abutment surface **212** can help counteract a shear load imposed on the deck **102** to thereby prevent the slabs **300** from moving under shear loading.

FIG. 4A shows an isometric view of a slab **300** of the storm water management system **100**. The slab **300** can include a seam **306**. The seam **306** of the slab **300** can be a groove and can be used to join or seal the slab **300** with an adjacent module, as discussed herein with regard to the seam **206** of the connecting column **200**. In the illustrated embodiment, the seam **306** extends along the end surfaces **305** and the side surfaces **309**. The slab **300** can include one or more anchoring points **304**. The anchoring points **304** of the slab **300** can be similar to the anchor points **204** of the connecting column **200**. The anchor points **304** of the slab **300** can be used to move, haul, position, or lift the slab **300**.

FIG. 4B shows a top view of the slab **300** shown in FIG. 4A. FIG. 4C shows an edge or side view of the slab **300** shown in FIG. 4A. FIG. 4D shows a side view of the portion of the slab **300** indicated by the section D shown in FIG. 4C. The slab can include one or more chamfered edges **308**, as shown in FIG. 4D.

FIG. 5A shows an end cross-sectional view of a slab **300** seated into a notch **214** of a top corbel **202**. The shelf **210** of the top corbel **202** can have a shelf width **221** corresponding to the width of the overlap between the interior surface **301** of the slab **300** and the shelf surface **210** of the top corbel **202**. The top corbel **202** can have a canted surface **222** that forms a top corbel angle **224** with an exterior surface **211** the connecting column **200**, as indicated in FIG. 5A. The top corbel **202** can have a spacer surface **223** that extends from the canted surface **222** to the shelf surface **210**. The spacer surface **223** can have a spacer width **225** as indicated in FIG. 5A. The shelf width **221**, the top corbel angle **224**, and the spacer width **225** can be selected so that the corbel **202** can support a load that includes the weight of the slab and the weight of the any material that is supported by the slab **300**. The sidewall **205** can have a side wall thickness **227**, and the top wall **203** can have a top wall thickness **229**, as indicated in FIG. 5A. The side wall and top wall thicknesses **227**, **229** can be selected so that the connecting column **200** can support the loads applied to the connecting column **200**. The connecting column **200** can have one or more interior canted surfaces **231**. FIG. 5A shows an interior canted surface **231** that extends between the interior surfaces of the top wall **203** and the side wall **205**. The slab **300** can have a slab thickness **333**, and the canted surface **222** can have a canted surface height **335**, as indicated in FIG. 5A.

In some embodiments, the shelf width **221** is 12 inches. In some embodiments, the shelf width **221** is 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, 36 inches, or a value between the aforementioned values. In some embodiments, the spacer width **225** is 8

inches. In some embodiments, the spacer width **225** is 4 inches, 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, or any value between the aforementioned values. In some embodiments, the side wall thickness **227** is 8 inches. In some embodiments, the side wall thickness **227** is 4 inches, 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, or any value between the aforementioned values. In some embodiments, the top wall thickness **229** is 10 inches. In some embodiments, the top wall thickness **229** is 4 inches, 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, 36 inches, or any value between the aforementioned values. In some embodiments, the canted surface height **235** is 8 inches. In some embodiments, the canted surface height **235** is 4 inches, 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, or any value between the aforementioned values. In some embodiments, the canted surface height **235** is 4 inches, 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, or any value between the aforementioned values.

FIG. **5B** shows an end view of a slab **300** seated into a notch **214** of a bottom corbel **202**. The bottom corbel **202** can be similar to the top corbel **202**, except as differently described herein. The bottom corbel **202** can have a canted surface **222** that forms a bottom corbel angle **226** with the exterior surface **211** of the connecting column **200**, as indicated in FIG. **5B**. In the illustrated embodiment, the top corbel angle **224** and the bottom corbel angle **226** are both approximately 135 degrees. In some variants the top corbel angle **224** can have a value different from that of the bottom corbel angle **226**. In some arrangements the top angle **224** or bottom corbel angle **226** can be with the range of 110 degrees and 160 degrees. The notch **214** can have a notch angle **228** formed between the abutment surface **212** and the shelf surface **210**. The notch angle **228** can be between 88 and 92 degrees, between 85 and 95 degrees, between 80 and 100 degrees, and between 75 and 105 degrees. FIG. **5B** shows an interior canted surface **223** extends between the side wall **205** and the base wall **201**.

In some embodiments, the slab thickness **331** of the top slab **300** is 12 inches. In some embodiments, the slab thickness **331** of the top slab **300** is 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, 36 inches, or a value between the aforementioned values. In some embodiments, the slab thickness **331** of the bottom slab **300** is 10 inches. In some embodiments, the slab thickness **331** of the top slab **300** is 6 inches, 8 inches, 10 inches, 12 inches, 14 inches, 16 inches, 20 inches, 24 inches, 36 inches, or a value between the aforementioned values.

FIG. **6A** shows an isometric view of an end column **400**. FIG. **6B** shows a top view of the end column **400** shown in FIG. **6A**. FIG. **6C** shows an end view of the end column **400** shown in FIG. **6A**. FIG. **6D** shows a side view of the end column **400** shown in FIG. **6A**. FIG. **6E** shows an end view of an end opposite the end of the end column **400** shown in FIG. **6C**. FIG. **6F** shows an end view of a top corbel **402** of the end column **400** as indicated by the section labeled "F" in FIG. **6C**. FIG. **6G** shows an end view of a bottom corbel **402** of the end column **400** as indicated by the section labeled "G" in FIG. **6C**.

As shown in FIGS. **6A-6G**, the end column **400** can include features corresponding to those described herein for the connecting column **200**. Specifically, the illustrated end column **400** includes a pair of corbels **402**, four anchor points **404**, a seam **406**, a horizontal surface **410**, a vertical

surface **412**, a notch **414**, an end-column port **420**, and a canted surface **422** similar to corresponding features described herein with respect to the connecting column **200**. FIG. **6D** shows that the end-column port **420** can be a circular through hole that passes through the wall of the end column **400** near the bottom corbel **402**. As shown in FIG. **6A**, the end column **400** can include an inner ramped surface **423** that rises from the base of the end column **400** to meet the vertical wall of the end column **400** near the height where the end-column port **420** passes through the vertical wall of the end column **400**. The ramped wall **423** forms an angle of approximately 135 degrees with the inner surface of the base of the end column **400**, as shown in FIG. **6A**. In some arrangements the ramped wall **423** forms an angle with the vertical wall of the end column **400** that can be with the range of 110 degrees and 160 degrees.

FIG. **7A** shows an isometric view of an end column **400**. FIG. **7B** shows a top view of the end column **400** shown in FIG. **7A**. FIG. **7C** shows a side view of the end column **400** shown in FIG. **7A**. FIG. **7D** shows an end view of the end column **400** shown in FIG. **7A**. FIG. **7E** shows a side view of a side opposite the side of the end column **400** shown in FIG. **7C**. FIG. **7F** shows an end view of an end opposite the end of the end column **400** shown in FIG. **7D**. FIG. **7G** shows an end view of a top corbel **402** of the end column **400** as indicated by the section labeled "G" in FIG. **7D**. FIG. **7H** shows an end view of a bottom corbel **402** of the end column **400** as indicated by the section labeled "H" in FIG. **7D**.

As shown in FIGS. **7A-7G**, the end column **400** can include features corresponding to those described herein for the connecting column **200** and the end column **400** shown in FIGS. **6A-6G**. Specifically, the illustrated end column **400** includes a pair of corbels **402**, four anchor points **404**, a seam **406**, a horizontal surface **410**, a vertical surface **412**, a notch **414**, an end-column port **420**, and a canted surface **422** similar to corresponding features described herein with respect to the connecting column **200**.

FIG. **7C** shows that the end column **400** can include an inlet opening **416**. The inlet opening **416** can be sized to allow an inlet pipe (not shown) to pass through the inlet opening **416** to access an interior space of the end column **400** that is framed by the base, the top, and the side walls of the end column **400**. As discussed herein, water can enter the interior space of the end column **400** and be distributed along a duct-like structure formed by a plurality of end columns **400** arranged end to end with one another to form a manifold structure. In the illustrated embodiment, the inlet opening **416** is a circular through hole that has a smaller diameter than that of the end-column port **420**. As shown in FIG. **7C**, the inlet opening **416** and the end-column port **420** can be offset relative to one another. In the illustrated embodiment, the inlet opening **416** is disposed closer to the base of the end column **400** than is the end-column port **420**. In some variants, the inlet opening **416** can be axially aligned with end-column port **420**. In some embodiments, the inlet opening **416** can overlap partially with the connector port **420** when viewed from the side view that is shown in FIG. **7C**. In the illustrated embodiment, the inlet opening **416** passes through a ramped inner wall that is near the base of the end column **400**, giving the inlet opening **416** an open trough form, as shown in FIG. **7B**.

FIGS. **8A-8H** show similar views of an end column **400** as those views shown in FIGS. **7A-7H**. As shown in FIG. **8C**, the end column **400** can have an inlet opening **416** that axially aligns with the end-column port **420** when the inlet opening **416** is viewed along the longitudinal axis of the inlet opening **416**. In the illustrated embodiment, a portion of the

outer diameter of the inlet opening **416** aligns with a portion of the outer diameter of the end-column port **420** when viewed along the longitudinal axis of the inlet opening **416**.

FIG. **9A** shows an isometric view of an end column **400**. FIG. **9B** shows a top view of the end column **400** shown in FIG. **9A**. FIG. **9C** shows a side view of the end column **400** shown in FIG. **9A**. FIG. **9D** shows an end view of the end column **400** shown in FIG. **9A**. FIG. **9E** shows a side view of a side opposite the side of the end column **400** shown in FIG. **9C**. FIG. **9F** shows an end view of a top corbel **402** of the end column **400** as indicated by the section labeled “F” in FIG. **9D**. FIG. **9G** shows an end view of a bottom corbel **402** of the end column **400** as indicated by the section labeled “G” in FIG. **9D**. As shown in FIGS. **9A-9G**, the end column **400** can include features corresponding to those described herein for the connecting column **200** and the end column **400** shown in FIGS. **6A-6G**. Specifically, the illustrated end column **400** includes an inlet opening **416** that is similar in size and shape as the end-column port **420**. As shown in FIG. **9D**, the inlet opening **416** can be arranged to axially align with the end-column port **420** when the inlet opening **416** is viewed along the longitudinal axis of the inlet opening **416** (see FIG. **9C**).

FIGS. **10A-10G** show similar views of an end column **400** as those views shown in FIGS. **9A-9G**. As shown in FIG. **10C**, the end column **400** can have an inlet opening **416** that is similar in size and shape with the end-column port **420**, with the inlet opening **416** being disposed slightly further away from a bottom or base of the end column **400** than is the end-column port **420**.

FIGS. **11A-11G** show similar views of an end column **400** as those views shown in FIGS. **6A-6G**. As shown in FIG. **11A**, the end column **400** is similar to the end column shown in FIG. **6A** except that the end column **400** of FIG. **11A** does not have any corbels **402**.

FIG. **12A** shows an isometric view of an access module **500**. The access module **500** can include an access port **112** sized to allow a person to access the interior space of the storm water management system **100**, as discussed herein. The access module **500** can include a seam **506** similar to the seam **206** described herein. FIG. **12B** shows a top view of the access module **500** shown in FIG. **12A**. FIG. **12C** shows an end view of the access module **500** shown in FIG. **12A**. FIG. **12D** shows a side view of the access module **500** shown in FIG. **12A**. FIG. **12E** shows an end view of an end opposite the end of the access module **500** shown in FIG. **12C**. FIG. **12F** shows an end view of a portion of the access module **500** that is indicated by the section labeled “F” in FIG. **12C**. FIG. **12G** shows an end view of a portion of the access module **500** that is indicated by the section labeled “G” in FIG. **12C**.

FIG. **13A** shows an isometric view of a left-notched module **600**. The left-notched module **600** can have a notch **630** that opens to a left-side edge of the module when the module is viewed from outside surface having the notch **630**. The left-notched module **600** can include a seam **606** similar to the seam **206** described herein. FIG. **13B** shows a top view of the left-notched module **600** shown in FIG. **13A**. FIG. **13C** shows an end view of the left-notched module **600** shown in FIG. **13A**. FIG. **13D** shows a side view of the left-notched module **600** shown in FIG. **13A**. As shown in FIG. **13D**, the notch **630** can occupy about 10% of the area of the side wall **605**. In some embodiments, a ratio between the area of the notch **630** and the area of the side wall **605** is 1:50; 1:20; 1:10; 1:8; 1:5, and values therebetween. FIG. **13E** shows an end view of an end opposite the end of the left-notched module **600** shown in FIG. **13C**. FIG. **13F**

shows an end view of a portion of the left-notched module **600** that is indicated by the section labeled “F” in FIG. **13C**. FIG. **13G** shows an end view of a portion of the left-notched module **600** that is indicated by the section labeled “G” in FIG. **13C**.

FIG. **14A** shows an isometric view of a right-notched module **700**. The right-notched module **700** is similar to the left-notched module **600** except as differently described herein. The right-notched module **700** can have a notch **730** that opens to a right-side edge of the module when the module is viewed from outside surface having the notch **730**. The right-notched module **700** can include a seam **706** similar to the seam **206** described herein. FIG. **14B** shows a top view of the right-notched module **700** shown in FIG. **14A**. FIG. **14C** shows an end view of the right-notched module **600** shown in FIG. **14A**. FIG. **14D** shows a side view of the right-notched module **700** shown in FIG. **14A**. FIG. **14E** shows an end view of an end opposite the end of the right-notched module **700** shown in FIG. **14C**. FIG. **14F** shows an end view of a portion of the right-notched module **700** that is indicated by the section labeled “F” in FIG. **14C**. FIG. **14G** shows an end view of a portion of the right-notched module **700** that is indicated by the section labeled “G” in FIG. **14C**.

The right-notched module **700** and the left-notch module can be sized so the corresponding notches **730**, **630** of the notched modules **700**, **600** align with one another to form a through hole when the notched modules **700**, **600** are positioned end to end with one another. The notched modules **700**, **600** can be used to form the manifold structure described with regard to FIG. **25**. The through hole formed by joining the notched modules **700**, **600** can provide or form a manifold port **120**, as shown in FIG. **25** and described herein.

FIG. **15A** shows an isometric view of a dead-end module **800**. The dead-end module **800** can have a closed wall **832** that prevents flow through the closed wall **832**. The dead-end module **800** can include a seam **806** similar to the seam **206** described herein. FIG. **15B** shows a top view of the dead-end module **800** shown in FIG. **15A**. FIG. **15C** shows an end view of the dead-end module **800** shown in FIG. **15A**. FIG. **15D** shows a side view of the dead-end module **800** shown in FIG. **15A**. FIG. **15E** shows sectional view along the sectional line labeled “E” in FIG. **15B**. FIG. **15F** shows an end view of a portion of the dead-end module **800** that is indicated by the section labeled “F” in FIG. **15C**. FIG. **15G** shows an end view of a portion of the dead-end module **800** that is indicated by the section labeled “G” in FIG. **15C**.

FIG. **16A** shows an isometric view of an open-ended module **900**. The open-ended module **900** can have a closed wall **932** that prevents flow through the closed wall **932**. The open-ended module **900** can include an end opening **934** that provides a flow path through the closed wall **932**. The open-ended module **900** can include a seam **906** similar to the seam **206** described herein. FIG. **16B** shows a top view of the open-ended module **900** shown in FIG. **16A**. FIG. **16C** shows an end view of the open-ended module **900** shown in FIG. **16A**. FIG. **16D** shows a side view of the open-ended module **900** shown in FIG. **16A**. FIG. **16E** shows an end view of an end opposite the end of the open-ended module **900** shown in FIG. **16C**. FIG. **16F** shows sectional view along the sectional line labeled “F” in FIG. **16B**. FIG. **16G** shows an end view of a portion of the open-ended module **900** that is indicated by the section labeled “G” in FIG. **16C**. FIG. **16H** shows an end view of a portion of the open-ended module **900** that is indicated by the section labeled “H” in FIG. **16C**.

17

FIG. 17A shows an isometric view of a wrapped-seam end module 1000. The wrapped-seam end module 1000 can have a closed wall 1032 that prevents flow through the closed wall 1032. The wrapped-seam end module 1000 can include a seam 1006 similar to the seam 206 described herein. As shown in FIG. 17A, the seam 1006 can form a closed loop that extends across an end face and a side face of the wrapped-seam end module 1000. FIG. 17B shows a top view of the wrapped-seam end module 1000 shown in FIG. 17A. FIG. 17C shows an end view of the wrapped-seam end module 1000 shown in FIG. 17A. FIG. 17D shows a side view of the wrapped-seam end module 1000 shown in FIG. 17A. FIG. 17E shows a sectional view along the sectional line labeled "E" in FIG. 17B. FIG. 17G shows an end view of a portion of the wrapped-seam end module 1000 that is indicated by the section labeled "G" in FIG. 17C. FIG. 17H shows an end view of a portion of the wrapped-seam end module 1000 that is indicated by the section labeled "H" in FIG. 17C.

FIG. 18A shows an isometric view of a spacer module 1100. The spacer module 1100 can include a seam 1106 similar to the seam 206 described herein. The spacer module 1100 can have a frame-like structure with open opposing end faces such that a plurality of space modules 1100 positioned end-to-end with one another can form a channel- or duct-like structure. The spacer modules 1100 can be sealed to form a channel adapted for conveyance of water from one location to another. FIG. 18B shows a top view of the spacer module 1100 shown in FIG. 18A. FIG. 18C shows an end view of the spacer module 1100 shown in FIG. 18A. FIG. 18D shows a side view of the spacer module 1100 shown in FIG. 18A. FIG. 18E shows an end view of an end opposite the end of the spacer module 1100 shown in FIG. 18C. FIG. 18F shows an end view of a portion of the spacer module 1100 that is indicated by the section labeled "G" in FIG. 18C. FIG. 18G shows an end view of a portion of the spacer module 1100 that is indicated by the section labeled "G" in FIG. 18C.

FIG. 19A shows an isometric view of a communicating spacer module 1200. The communicating spacer module 1200 can include a seam 1206 similar to the seam 206 described herein. The seam 1206 can form a continuous loop that extends over a side surface and two opposing end surfaces of the communicating spacer module 1200, as shown in FIG. 19A. The communicating spacer module 1200 can have a frame-like structure with open opposing end faces such that a plurality of communicating spacer module 1200 positioned end-to-end with one another can form a structure for use in conveyance as described herein with regard to the spacer module 1100 shown in FIG. 18A. The communicating spacer module 1200 can include a wall opening 1240 that provides a flow path between the exterior and the interior space of the communicating spacer module 1200. FIG. 19B shows a top view of the communicating spacer module 1200 shown in FIG. 19A. FIG. 19C shows an end view of the communicating spacer module 1200 shown in FIG. 19A. FIG. 19D shows a side view of the communicating spacer module 1200 shown in FIG. 19A. FIG. 19E shows an end view of an end opposite the end of the communicating spacer module 1200 shown in FIG. 19C. FIG. 19F shows an end view of a portion of the communicating spacer module 1200 that is indicated by the section labeled "G" in FIG. 19C. FIG. 19G shows an end view of a portion of the communicating spacer module 1200 that is indicated by the section labeled "G" in FIG. 19C. As shown in FIG. 19D, the wall opening 1240 can pass through a ramped interior wall near the base of the communicating

18

spacer module 1200. FIG. 19B shows that at least a portion of the wall opening 1240 can have an open trough-like structure by virtue of the wall opening 1240 passing through the ramped interior wall near the base of the communicating spacer module 1200.

FIGS. 20A-20E show views of a spacer module 1100B that are similar to the spacer module 1100 shown in FIGS. 18A-18E. As shown in FIG. 20A, the dimensions of the space module 1100, 1100B can be modified depending on the requirements of the storm water management system 100. For example, the spacer module 1100B shown in FIG. 20A has similar dimensions as the spacer module 1100 of FIG. 18A except that the spacer element 1100B shown in FIG. 20A has a shorter longitudinal length 19 (shown in FIG. 20D) than that of the spacer element 1100 shown in FIG. 18A. All the dimensions of the spacer module 1100B and the other modular components can similarly be varied depending on the requirements of the storm water management system 100.

FIG. 21A shows an isometric view of a multi-seamed spacer module 1250. The multi-seamed spacer module 1250 can have open opposing faces that form a duct-like structure when a plurality of multi-seamed spacer modules 1250 are aligned end-to-end with each other. The multi-seamed spacer module 1250 can have a top seam 1256a near the top of the multi-seamed spacer module 1250. The multi-seamed spacer module 1250 can have a bottom seam 1256b near the base of the multi-seamed spacer module 1250. FIG. 21B shows a top view of the multi-seamed spacer module 1250 shown in FIG. 21A. FIG. 21C shows an end view of the multi-seamed spacer module 1250 shown in FIG. 21A. FIG. 21D shows a side view of the multi-seamed spacer module 1250 shown in FIG. 21A. FIG. 21E shows an end view of an end opposite the end of the multi-seamed spacer module 1250 shown in FIG. 21C. FIG. 21F shows an end view of a portion of the multi-seamed spacer module 1250 that is indicated by the section labeled "F" in FIG. 21C. FIG. 21G shows an end view of a portion of the multi-seamed spacer module 1250 that is indicated by the section labeled "G" in FIG. 21C.

FIG. 22A shows an isometric view of a communicating wrapped-seam end module 1300, that is similar to the wrapped-seam end module 1000 of FIG. 17A except as described differently herein. FIG. 22B shows a rear isometric view of the communicating wrapped-seam end module 1300 shown in FIG. 22A. As shown in FIG. 22B, the communicating wrapped-seam end module 1300 can include a closed wall 1332 that prevents flow through the closed wall 1332. The communicating wrapped-seam end module 1300 can include an end opening 1334 that provides a flow path through the closed wall 1332. The communicating wrapped-seam end module 1300 can include a seam 1306 similar to the seam 206 described herein. FIG. 22C shows a top view of the communicating wrapped-seam end module 1300 shown in FIG. 22A. FIG. 22D shows an end view of the communicating wrapped-seam end module 1300 shown in FIG. 22A. FIG. 22E shows a side view of the communicating wrapped-seam end module 1300 shown in FIG. 22A. FIG. 22F shows an end view of an end opposite the end of the multi-seamed spacer module 1300 shown in FIG. 22D. FIG. 22G shows an end view of a portion of the wrapped-seam end module 1000 that is indicated by the section labeled "G" in FIG. 22D. FIG. 22H shows an end view of a portion of the wrapped-seam end module 1300 that is indicated by the section labeled "H" in FIG. 22D.

FIG. 23A shows an isometric view of a communicating multi-seamed spacer module 1400. The communicating

multi-seamed spacer module **1400** can be similar to the multi-seamed spacer module **1200** of FIG. **21A** except as described differently herein. The communicating multi-seamed spacer module **1400** can have open opposing faces that form a duct-like structure when a plurality of communicating multi-seamed spacer modules **1400** are aligned end-to-end with each other. The communicating multi-seamed spacer module **1400** can have a top seam **1406a** near the top of the communicating multi-seamed spacer module **1400**. The communicating multi-seamed spacer module **1400** can have a bottom seam **1206b** near the base of the communicating multi-seamed spacer module **1400**. FIG. **23B** shows a top view of the communicating multi-seamed spacer module **1400** shown in FIG. **23A**. FIG. **23C** shows an end view of the communicating multi-seamed spacer module **1400** shown in FIG. **23A**. FIG. **23D** shows a side view of the communicating multi-seamed spacer module **1400** shown in FIG. **23A**. FIG. **23E** shows an end view of an end opposite the end of the communicating multi-seamed spacer module **1400** shown in FIG. **23C**. FIG. **23F** shows an end view of a portion of the communicating multi-seamed spacer module **1400** that is indicated by the section labeled “F” in FIG. **23C**. FIG. **23G** shows an end view of a portion of the communicating multi-seamed spacer module **1400** that is indicated by the section labeled “G” in FIG. **23C**. The communicating multi-seamed spacer module **1400** can include a wall opening **1440** that provides a flow path between the exterior and the interior space of the communicating multi-seamed spacer module **1400** as discussed herein. The multi-seamed spacer module **1400** can include an inner ramped surface **1423** similar to the inner ramped surface **423** (FIG. **6A**) except as described differently herein. As shown, at least a portion of the wall opening **1440** can pass through the inner ramped surface **1423**.

FIG. **24** illustrates a schematic diagram of a flow path of water through the storm water management system **100**. Storm water can be collected by an upstream plumbing system **2000**. The upstream plumbing system can deliver the storm water to an inflow pipe or flow channel **2100**. The inflow pipe or flow channel **2100** can deliver the storm water to the storm water management system **100**. Water can be removed from the storm water management system through an outflow pipe or flow channel **2200**. The outflow pipe or flow channel **2200** can deliver the storm water to a downstream plumbing system **2300**. In some embodiments one or more of the aforementioned features can be removed from the flow path depending on the use of the storm water management system **100**. For example, a storm water management system **100** configured for infiltration may not pass the storm water through to a downstream plumbing system **2300**.

FIG. **25** illustrates a top view of a portion of a storm water management system **100**. The storm water management system **100** can include modules that can be assembled to create a manifold structure **114** or other portions of the storm water management system **100**. The manifold structure **114** can receive water inflow through an inlet pipe **116**. The modules that form the manifold structure **114** can be open on one side or include features that provide a flow path across a wall of the module such that modules form a duct of channel when assembled. In the illustrated embodiment of FIG. **25**, the manifold structure **114** can form a duct that provides a flow path in the direction from the inlet pipe **116** toward the access port **112**. In the illustrated embodiment, the manifold structure **114** is at an edge or periphery of the storm water management system **100**, and the inlet pipe **116** enters a long side **113** of the manifold structure **114**. In some

arrangements, the manifold structure **114** can be disposed centrally from the periphery of the storm water management system **100**. For example with reference to the orientation of the system **100** shown in FIG. **25**, the manifold structure **114** can be disposed vertically with connecting columns **200** and slabs **300** disposed to the left side and to the right side of the manifold structure **114**. In some arrangements, the inlet pipe **116** can enter the manifold structure **114** at a short end **115** of the manifold structure **114**. In some variants, the inlet pipe **116** can be extended through the internal space of the system **100** to reach a long side **113** of a centrally-located manifold structure **114**.

With continued reference to FIG. **25**, the manifold structure **114** can include manifold ports **120** that provide a flow path between the manifold structure **114** and an adjacent portion of the storm water management system **100**. The manifold structure **114** can help to distribute water from the inlet pipe **116** to the other portions of the storm water management system **100**.

As described herein, the storm water management system **100** can be adapted to perform one or more of the functions of retention, detention, conveyance, and infiltration. For example, the floor **104** can be sealed for a storm water management system **100** configured for retention, detention, or conveyance. In some variants, the floor **104** can include a plurality of through holes or seepage paths that allow water within the storm water management system **100** to seep or flow into the underlying supporting surface over which the system **100** is installed. In the illustrated embodiment, the interface between adjacent connecting columns **200** aligns with the interface between adjacent slabs **300**. In some embodiments, the interface between adjacent connecting columns **200** can be offset from the interface between adjacent slabs **300**. When these interfaces are offset from one another, a connecting column **200** will partially span across two adjacent slabs.

FIG. **26** illustrates a side cross-sectional view of a storm water management system **100** configured for retention. The water level of the storm water within the system **100** is shown as a horizontal line **3**. The horizontal line **3** is shown at the level of the connecting column port **220**. The water level within the storm water management system **100** can be higher or lower than the illustrated horizontal line **3**. The storm water management system **100** can include an inlet pipe **116** that delivers storm water to the interior space of the storm water management system **100**. The storm water management system **100** can include connecting columns **200**, slabs **300**, and end columns **400** as described herein. In some embodiments, the storm water management system **100** can have an outflow pipe **117**. The outflow pipe **117** can be arranged as an overflow conduit that provides a flow path for water to exit the interior space of the storm water management system **100**. The outflow pipe **117** can be positioned near the top wall **405** of an end column **400** and can serve as an overflow pipe, as shown in FIG. **26**. In some variants, the maximum flow rate of the outflow pipe **117** can be similar to or greater than the maximum flow rate of the inlet pipe **116**. In some embodiments, the storm water management system **100** that is configured for retention does not include an outflow pipe **117**. As will be appreciated, in the illustrated embodiment, water below the level of the outflow pipe **117** (and the inflow pipe **116** unless there is a check valve on the inflow pipe **116**) will be retained indefinitely. Further, with the outflow pipe **117** located near the top wall **405**, the system can retain a volume of water equal to at least the majority, at least 60%, at least 70% or at least 80% of the internal space defined by the system **100**.

FIG. 27 illustrates a side cross-sectional view of a storm water management system 100 configured for detention. The storm water management system 100 can include an inlet pipe 116 that delivers storm water to the interior space of the storm water management system 100. The storm water management system 100 can include an outflow pipe 117 that provides a flow path for storm water to leave the interior space of the system 100. In some variants, the outflow pipe 117 can be arranged as a flow restriction, with the maximum flow rate of the outflow pipe 117 being less than the maximum flow rate of the inlet pipe 116. The storm water management system 100 can be sealed to prevent the accumulated storm water from entering (infiltrating) the underlying surface 10. The storm water management system 100 can detain the water within the interior space of the system 100 and slowly release the water from the interior space through the outflow pipe 117. The maximum flow rate of storm water through the outflow pipe 117 can be less than the maximum flow rate of storm water through the inlet pipe 116, allowing a rapid flood of storm water to be detained within the system 100 and released from the system 100 slowly through the outflow pipe 117. The outlet pipe 117 can be positioned closer to the floor 104 of the system 100 than is the inlet pipe 116, as shown in FIG. 27. As will be appreciated, in the illustrated embodiment, water below the level of the outflow pipe 117 (and the inflow pipe 116 unless there is a check valve on the inflow pipe 116) will be retained indefinitely. However, with the outflow pipe 117 located near the base wall 401, the system 100 can discharge a volume of water equal to at least the majority, at least 60%, at least 70% or at least 80% of the internal space defined by the system.

FIG. 28 illustrates a side cross-sectional view of a storm water management system 100 configured for infiltration. The storm water management system 100 can include an inlet pipe 116 that delivers storm water to the interior space of the storm water management system 100. The storm water management system 100 can include a plurality of flow passages 299, 399, 499 that allow the accumulated storm water to infiltrate the underlying surface 10. In some arrangements, as an alternative or in addition to the flow passages defined by individual slabs, the slabs 300 that are positioned on the underlying surface 10 can be sized and positioned such that they are not flush with one another such that there is a gap between adjacent slabs 300. The gap provides a flow path for water within the system 100 to infiltrate the underlying surface 10.

FIG. 29 illustrates a side cross-sectional view of a storm water management system 100 configured for conveyance. The storm water management system 100 can include a plurality of connecting columns 200 positioned end-to-end to form a duct for conveying water. The duct structure can be sealed to prevent the conveyed water from escaping the duct. In the illustrated embodiment, the water level 3 is shown in the interior space 207 of the connecting column 200, the interior space 407 of the end columns 400 and the interior space 307 between the slabs 300. In some arrangements, the water can be conveyed by one or more than one of these interior spaces 207, 307, 407. For example, in some embodiments, the water is conveyed in the interior space of the connecting column 200 and end column 400 but not within the interior space 307 between the slabs 300. In some embodiments, the interior spaces 207, 307, 407 are fluidically isolated from one another such that there are no connector ports or flow paths connecting the interior spaces 207, 307, 407 to one another.

FIG. 30 shows a schematic diagram of a method of assembling the storm water management system 100. The method includes a first step 3000 of positioning a first slab 300 on the underlying surface 10. The method further includes a second step 3100 of positioning a second slab on the underlying surface 10 such that the second slab 300 is spaced apart from the first slab 300, thereby forming a first opening between the first and second slabs 300. The method further includes the step 3200 of seating a first connecting column in the first opening. The method further includes the step 3300 of positioning a third slab 300 end-to-end with the first slab 300. The method further includes the step 3400 of positioning a fourth slab 300 end-to-end with the second slab 300 such that the fourth slab 300 is spaced apart from the third slab 300, thereby forming a second opening between the third and fourth slabs 300. The method further includes the step 3500 of seating a second connecting column 200 in the second opening. The method can further include repeating the alternation of the steps of end-to-end positioning of slabs 300 and seating of connecting columns 200 into the openings formed between the most-recently positioned slabs 300 such that the system 100 is extended along a direction of the end-to-end alignment of the slabs 300.

FIG. 31A illustrates a storm water management system configured for retention. As discussed, the storm water management system 100 can include one or more than one access ports 112. The access ports 112 can be distributed on the modules that make up the deck 102 of the storm water management system 100. The number and distribution of the access ports 112 can be selected to accommodate a desired amount of access to the enclosed interior space of the system 100. In the illustrated embodiment, the storm water management system 100 has an access port 112 disposed on the end column 400 with the inlet pipe 116, on the end column 400 with the outflow pipe 117, on the connecting column 200, and on the slab 300 that extends between the connecting column 200 and the end column 400. In some aspects, the inlet pipe 116 can have a cross-sectional area that is equal to or within 20% of the cross-sectional area of the outflow pipe 117. In some aspects, the cross-sectional area of the inlet pipe 116 can be greater than the cross-sectional area of the outflow pipe 117. FIG. 31B illustrates the access port 112 can be disposed on a right-notched module 700 having a notch 730 and a through hole 119 to accommodate an inlet pipe 116 or an outflow pipe 117. In the illustrated embodiment, the notch 730 extends through the inner ramped surface 723 to the base wall 701. FIG. 31C illustrates the access port 112 can be disposed on an end column 400 having a pair of corbels 402 and an end-column port 420. FIG. 31D illustrates the access port 112 can be disposed on a slab 300. FIG. 31E illustrates the access port 112 can be disposed on a connecting column 200. In the illustrated embodiment, the connecting column 200 is monolithic and each of the two side walls 205 has a pair of corbels 202 and a column port 220.

FIG. 32A illustrates a storm water management system 100 configured for detention. The access ports 112 can be disposed on the end column 400, on the connecting column 200, and on the slab 300 that extends between the connecting column 200 and the end column 400. In some aspects, the inlet pipe 116 can have a cross-sectional area that is over 20% greater than the cross-sectional area of the outflow pipe 117. In some aspects, the cross-sectional area of the inlet pipe 116 can be greater than the cross-sectional area of the outflow pipe 117 by about: 10%, 20%, 40%, 100%, 200%, or a value that is between any of the aforementioned values.

FIG. 32B illustrates the access port 112 can be disposed on a right-notched module 700 having a notch 730 and a through hole 119 to accommodate an inlet pipe 116. FIG. 32C illustrates the access port 112 can be disposed on a left-notched module 600 having a notch 630 and a through hole 119 to accommodate an outflow pipe 117. The through hole 119 can pass through the inner ramped surface 623 near the base wall 601.

FIG. 33A illustrates a storm water management system configured for conveyance. The access ports 112 can be disposed on the end column 400 with the inlet pipe 116, on the end column 400 with the outflow pipe 117, on the connecting column 200, and on the slab 300 that extends between the connecting column 200 and the end column 400. FIG. 33B illustrates the access port 112 can be disposed on an end column 400 having a pair of corbels 402 extending from only one side wall 405 and not having a connector port 420 (FIG. 31C) disposed on either side wall 405. FIG. 32C illustrates the access port 112 can be disposed on a connecting column 200 having a pair of corbels 402 extending from each of the two side walls 405 and not having a connector port 220 (FIG. 31E) disposed on either side wall 205.

FIG. 34A illustrates a storm water management system configured for infiltration. The access ports 112 can be disposed on the end column 400 with the inlet pipe 116, on the end column 400 with the outflow pipe 117, on the connecting column 200, and on the slab 300 that extends between the connecting column 200 and the end column 400. The bottom slabs 300 can be shortened in width relative to the top slabs 300 such that the bottom slabs 300 do not form a sealed deck 102 like the top slabs 300 but rather have gaps 344 between adjacent bottom slabs 300. The gaps 344 between adjacent bottom slabs 300 can provide a pathway for water within the storm water management system 100 to infiltrate the subsurface on which the bottom slabs 300 rest. FIG. 34B illustrates a storm water management system configured for infiltration. The storm water management system 100 is similar to the system 100 shown in FIG. 34A except that the bottom slabs 300 have perforations 399 that pass through the slab 300 rather than gaps 344 disposed between adjacent slabs 300. The perforations 399 can provide a pathway for water within the storm water management system 100 to infiltrate the subsurface on which the bottom slabs 300 rest.

FIG. 35 illustrates the storm water management system 100 can have a connecting column 200A that is not a monolithic structure but rather is a two-piece assembly comprising a U-shaped base portion 260 that is capped by a substantially planar lid portion 280. As shown, the storm water management system 100 can include an end column 400A that is not a monolithic structure but rather is a two-piece assembly of a U-shaped base portion 460 that is capped by a lid portion 480. The system 100 can include an access port 112 disposed in any or all of the lid portions 280, 480, and the top slab 300, as shown.

In the illustrated embodiment, the top slabs 300 are notched to seat onto the top corbels 202, 402. The lid portions 280, 480 are not notched and sit on the top surface of the top corbels 202, 402. The top slabs 300 are held in place under shearing loads due to the abutment surfaces of the notched slab 300 contacting an opposing abutment surface on the top corbel 202, 402, as discussed herein. The lid portions 280, 480 are held in place under shearing loads due to the abutment surfaces of the lid portion 280, 480 contacting an opposing abutment surface on the top slab 300. The base portion 260, 460 can have a bottom corbel 202, 402 that over hangs an edge of the bottom slab 300, as

shown. The bottom slab 300 can help distribute a load (e.g., earth load) that is applied to the top deck 102 of the system 100, as discussed herein.

As will be appreciated, in the illustrated embodiment, a load (e.g., earth load) applied to the deck 102 of the system 100, will tend to be distributed evenly to the base portion 260 of the connecting columns 200A because the connecting columns 200A have a top slab 300 resting on each of the top corbels 202 that extend from the sidewalls 205. By contrast, a load applied to the deck 102 can be eccentrically or unevenly distributed to the base portion 460 of the end column 400A because only one side wall 405 of the end column 400A has a top corbel 402 that receives the load from a top slab 300. This eccentric loading will tend to rotate the bottom corbel 402 of the end column 400A toward the underlying surface 10 on which the system 100 is installed. The bottom slab 300 can block the bottom corbel 402 of the end column 400A from rotating toward the underlying surface 10 and can thereby help to distribute the loads of the system 100 more evenly across the underlying surface 10. In some aspects, the presence of the bottom slab 300 can reduce the maximum earth load at the base portion 460 of the end column 400A by at least 30%, at least 40%, at least 50% or at least 80% compared to a system 100 that is lacking the bottom slab 300.

FIG. 36 illustrates the storm water management system 100 can have a connecting column 200B that is a two-piece assembly of an inverted-U-shaped top portion 282 that sits atop a U-shaped base portion 260. The system 100 can have an end column 400B that is a two-piece assembly of an inverted-U-shaped top portion 482 that sits atop a U-shaped base portion 460. The side wall 205, 405 of the inverted-U-shaped top portions 282, 482 can include a keyed feature 232, 432 that interlocks with a corresponding keyed feature 234, 434 disposed on the side wall 205, 405 of the U-shaped base portions 260, 280. The keyed feature 232, 432 and the corresponding keyed feature 234, 434 can interlock with each other to stabilize the inverted-U-shaped top portion 282, 482 laterally with respect to the U-shaped bottom portion 260, 280.

In some aspects, the two-piece assemblies of the connecting column 200B and the end column 400B allow a larger interior space 207, 407 to be enclosed by the connecting column 200B and the end column 400B. For example, a monolithic connecting column 200 (e.g., FIG. 33C) can be made by dry casting, in which case the height of the monolithic connecting column 200 is limited to a height of about 12 feet. By contrast, each of the inverted-U-shaped top portion 282 and the U-shaped base portion 260 of the two-piece connecting column 200B can be made by wet casting, and each portion 260, 282 can have a height of about 8 feet, giving a total height of about 16 feet for the interior space 207 enclosed by the connecting column 200B. The longitudinal length of the wet-casted portions 260, 282 can also be greater compared to the longitudinal length of a dry-casted monolithic connecting column 200.

FIG. 37 illustrates the storm water management system 100 can have a connecting column 200C and an end column 400C that are each a two-piece assembly of an inverted-U-shaped top portion 282, 482 that sits atop a planar base portion 284, 484. In the illustrated embodiment, the system 100 does not have a bottom slab 300 that extends between the planar base portion 284 of the connecting column 200C and the planar base portion 484 of the end column 400C. In some aspects, the bottom slabs 300 can be omitted from the system 100 to enhance the infiltration performance of the system 100. As can be appreciated from the illustrated

embodiment, omitting the bottom slabs 300 can result in eccentric loading of the end columns 400C and increased earth loads in the vicinity of the edge of the planar base portion 484 that underlies the top corbel 402 on which the top slab 300 rests, as discussed herein.

FIG. 38 illustrates the storm water management system 100 can have a monolithic connecting column 200D that has a top corbel 202 and no bottom corbel 202. The storm water management system 100 can have a monolithic end column 400D that also has a top corbel 402 and no bottom corbel 402. The bottom walls 401 of the columns 200D, 400D can sit directly on the underlying surface 10, as shown. As will be appreciated, in the illustrated embodiment, elevated earth loads due to eccentric loading can arise in the vicinity of the edge of the end column 400D that underlies the top corbel 402. Earth loads imposed on the underlying surface 10 that is under the connecting column 200D can be elevated compared to earth loads that arise when the connecting column 200D has a bottom corbel 202 that seats onto a bottom slab 300 (FIG. 36). In the illustrated embodiment, the maximum loads imposed on the underlying surface 10 that is under the base wall 201 of the connecting column 200D can be less than the maximum loads imposed on the underlying surface 10 that is under the base wall 401 of the end column 400D because the end column 400D can be subjected to eccentric loading of the top slab 300 bearing more heavily on the edge of the end column 400D that runs below the top corbel 402 compared to the opposing edge of the base wall 401 of the end column 400D. FIG. 39 illustrates the storm water management system 100 can have a monolithic connecting column 200E that has a bottom corbel 202 and no top corbel 202. The storm water management system 100 can have a monolithic end column 400E that also has a bottom corbel 402 and no top corbel 402. The bottom corbels 202, 402 can overlap a bottom slab 300. In some aspects, the bottom slab 300 facilitates better distribution of the load of the system 100 onto the underlying surface 10 such that the maximum load applied to the underlying surface 10 is less than the maximum load applied to the underlying surface 10 by a system that lacks bottom slabs 300. The illustrated embodiment has a notched top slab 300 that overhangs the top edge of the columns 200E, 400E. The notch 330 of the notched slab 300 can provide an abutment surface that contacts the corresponding abutment surface of the top edge of the column 200E, 400E such that the abutment surfaces can resist shear loads applied to the deck 102 of the system 100. In some aspects, the orientation can be reversed such that the top corner of the columns 200E, 400E are notched to receive a planar slab 300. In some variants, the top corner of the columns 200E, 400E can have a notch that is sized to interlock with a corresponding notch on the top slab 300.

The storm water management system 100 of the present disclosure can include modules and abutment surfaces that are combined in other arrangements than those shown herein. For example, the notched slab 300 shown in FIG. 35 could be arranged instead as a planar slab 300 that sits in a notched corbel 202, as shown in FIG. 36. As another example, the bottom slabs 300 shown in FIGS. 36 and 37 need not be planar slabs 300 and can be instead a notched bottom slab 300 that receives a portion of the bottom corbel 202, 402 such as in the case of the top slab 300 shown in FIG. 35. Each of these possible combinations of modules and abutment surfaces is within the scope of the present disclosure and is not shown for the sake of simplicity.

Other Variations and Terminology

Any value of a threshold, limit, duration, etc. provided herein is not intended to be absolute and, thereby, can be

approximate. In addition, any threshold, limit, duration, etc. provided herein can be fixed or varied either automatically or by a user. Furthermore, as is used herein relative terminology such as exceeds, greater than, less than, etc. in relation to a reference value is intended to also encompass being equal to the reference value. For example, exceeding a reference value that is positive can encompass being equal to or greater than the reference value. In addition, as is used herein relative terminology such as exceeds, greater than, less than, etc. in relation to a reference value is intended to also encompass an inverse of the disclosed relationship, such as below, less than, greater than, etc. in relations to the reference value. Moreover, although blocks of the various processes may be described in terms of determining whether a value meets or does not meet a particular threshold, the blocks can be similarly understood, for example, in terms of a value (i) being below or above a threshold or (ii) satisfying or not satisfying a threshold.

Features, materials, characteristics, or groups described in conjunction with a particular aspect, embodiment, or example are to be understood to be applicable to any other aspect, embodiment or example described herein unless incompatible therewith. All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features or steps are mutually exclusive. The protection is not restricted to the details of any foregoing embodiments. The protection extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

While certain embodiments have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of protection. Indeed, the novel methods and systems described herein may be embodied in a variety of other forms. Furthermore, various omissions, substitutions and changes in the form of the methods and systems described herein may be made. Those skilled in the art will appreciate that in some embodiments, the actual steps taken in the processes illustrated or disclosed may differ from those shown in the figures. Depending on the embodiment, certain of the steps described above may be removed, others may be added. For example, the actual steps or order of steps taken in the disclosed processes may differ from those shown in the figure. Depending on the embodiment, certain of the steps described above may be removed, others may be added. For instance, the various components illustrated in the figures may be implemented as software or firmware on a processor, controller, ASIC, FPGA, or dedicated hardware. Hardware components, such as controllers, processors, ASICs, FPGAs, and the like, can include logic circuitry. Furthermore, the features and attributes of the specific embodiments disclosed above may be combined in different ways to form additional embodiments, all of which fall within the scope of the present disclosure.

Although the present disclosure includes certain embodiments, examples and applications, it will be understood by those skilled in the art that the present disclosure extends beyond the specifically disclosed embodiments to other alternative embodiments or uses and obvious modifications and equivalents thereof, including embodiments which do not provide all of the features and advantages set forth herein. Accordingly, the scope of the present disclosure is not intended to be limited by the specific disclosures of

preferred embodiments herein, and may be defined by claims as presented herein or as presented in the future.

Conditional language, such as “can,” “could,” “might,” or “may,” unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements, or steps. Thus, such conditional language is not generally intended to imply that features, elements, or steps are in any way required for one or more embodiments or that one or more embodiments necessarily include logic for deciding, with or without user input or prompting, whether these features, elements, or steps are included or are to be performed in any particular embodiment. The terms “comprising,” “including,” “having,” and the like are synonymous and are used inclusively, in an open-ended fashion, and do not exclude additional elements, features, acts, operations, and so forth. Also, the term “or” is used in its inclusive sense (and not in its exclusive sense) so that when used, for example, to connect a list of elements, the term “or” means one, some, or all of the elements in the list. Further, the term “each,” as used herein, in addition to having its ordinary meaning, can mean any subset of a set of elements to which the term “each” is applied.

Conjunctive language such as the phrase “at least one of X, Y, and Z,” unless specifically stated otherwise, is otherwise understood with the context as used in general to convey that an item, term, etc. may be either X, Y, or Z. Thus, such conjunctive language is not generally intended to imply that certain embodiments require the presence of at least one of X, at least one of Y, and at least one of Z.

Language of degree used herein, such as the terms “approximately,” “about,” “generally,” and “substantially” as used herein represent a value, amount, or characteristic close to the stated value, amount, or characteristic that still performs a desired function or achieves a desired result. For example, the terms “approximately,” “about,” “generally,” and “substantially” may refer to an amount that is within less than 10% of, within less than 5% of, within less than 1% of, within less than 0.1% of, and within less than 0.01% of the stated amount. As another example, in certain embodiments, the terms “generally parallel” and “substantially parallel” refer to a value, amount, or characteristic that departs from exactly parallel by less than or equal to 15 degrees, 10 degrees, 5 degrees, 3 degrees, 1 degree, or 0.1 degree.

The scope of the present disclosure is not intended to be limited by the specific disclosures of preferred embodiments in this section or elsewhere in this specification, and may be defined by claims as presented in this section or elsewhere in this specification or as presented in the future. The language of the claims is to be interpreted broadly based on the language employed in the claims and not limited to the examples described in the present specification or during the prosecution of the application, which examples are to be construed as non-exclusive

What is claimed is:

1. A storm water drain system configured for retention of storm water, the system comprising:

a plurality of support modules positioned adjacent to one another on top of an underlying surface such that the plurality of support modules form a top deck, a bottom deck, and an interior space disposed between the top deck and the bottom deck, the top deck adapted to support an earth load applied to the top deck, the bottom deck adapted to hold a volume of water within the interior space such the volume of water is inhibited from infiltrating the underlying surface,

wherein the plurality of support modules includes at least one inflow end column, at least one outflow end column, and at least one infill slab, the at least one inflow end column comprising a through hole disposed in a side wall of the at least one inflow end column near a top-deck-forming portion of the at least one inflow end column, the at least one outflow end column comprising a through hole in disposed a side wall of the at least one outflow end column near a top-deck-forming portion of the at least one outflow end column, the at least one infill slab forming a portion of the bottom deck and comprising an abutment surface that contacts a corresponding abutment surface that is disposed on the at least one inflow end column or on the at least one outflow end column.

2. The storm water drain system of claim 1, wherein the system is sized such that a volume of water contained within the interior space occupies at least 80% of the interior space and the volume of water has a height that is less than a distance of the through holes from the bottom deck.

3. The storm water drain system of claim 1, wherein a difference in size between a cross-sectional area of the through hole disposed on the inflow end column and a cross-sectional area of the through hole disposed on the outflow end column is less than 20% of the cross-sectional area of the through hole disposed on the inflow end column.

4. The storm water drain system of claim 1, wherein at least one of the inflow end column and the outflow end column is a two-piece assembly comprising a top portion and a bottom portion.

5. The storm water drain system of claim 1, wherein at least one of the inflow end column and the outflow end column is monolithic.

6. A storm water drain system configured for detention of storm water, the system comprising:

a plurality of support modules positioned adjacent to one another on top of an underlying surface such that the plurality of support modules form a top deck, a bottom deck, and an interior space disposed between the top deck and the bottom deck, the top deck adapted to support an earth load applied to the top deck, the bottom deck adapted to hold a volume of water within the interior space such the volume of water is inhibited or prevented from infiltrating the underlying surface,

wherein the plurality of support modules includes an inflow end column and an outflow end column, the inflow end column comprising a through hole disposed in a side wall of the inflow end column near a top-deck-forming portion of the inflow end column, the outflow end column comprising a through hole in disposed a side wall of the outflow end column near a bottom-deck-forming portion of the outflow end column, wherein at least a one of the inflow end column and the outflow end column comprises a bottom corbel that extends from an outer surface of a sidewall of the one, the bottom corbel disposed within the interior space and comprising a surface that contacts the bottom deck.

7. The storm water drain system of claim 6, wherein the system is sized such that a volume of water contained within the interior space occupies less than 30% of the interior space and the volume of water has a height that is equal to a distance of the through holes from the bottom deck.

8. The storm water drain system of claim 6, wherein a cross-sectional area of the through hole disposed on the

inflow end column is at least 20% greater than a cross-sectional area of the through hole disposed on the outflow end column.

9. The storm water drain system of claim 6, wherein at least one of the inflow end column and the outflow end column is a two-piece assembly comprising a top portion and a bottom portion.

10. The storm water drain system of claim 6, wherein at least one of the inflow end column and the outflow end column is monolithic.

11. A storm water drain system configured for conveyance of storm water, the system comprising:

a plurality of support modules positioned adjacent to one another on top of an underlying surface such that the plurality of support modules form a top deck, a bottom deck, and an interior space disposed between the top deck and the bottom deck, the top deck adapted to support an earth load applied to the top deck, the bottom deck adapted to inhibit or prevent water within the interior space from infiltrating the underlying surface,

wherein the plurality of support modules comprises a first linear array of end column modules, a second linear array of end column modules, a top slab, and an infill slab, the first linear array of end column modules aligned end to end with one another to form a first channel within the interior space, the second linear array of end column modules aligned end to end with one another to form a second channel within the interior space, the infill slab forming a portion of the bottom deck and extending between the first linear array and the second linear array, the top slab forming a portion of the top deck and extending between the first linear array and the second linear array.

12. The storm water drain system of claim 11, wherein at least one of end column modules of the first or second linear array comprises a bottom corbel that extends from an outer surface of a sidewall of the at least one, the bottom corbel disposed within the interior space and comprising a surface that overlaps the infill slab.

13. The storm water drain system of claim 11, wherein at least one of the inflow end column and the outflow end column is a two-piece assembly comprising a top portion and a bottom portion.

14. The storm water drain system of claim 11, wherein at least one of the inflow end column and the outflow end column is monolithic.

15. A storm water drain system configured for infiltration of storm water, the system comprising:

a plurality of support modules positioned adjacent to one another on top of an underlying surface such that the plurality of support modules form a top deck, a bottom deck, and an interior space disposed between the top deck and the bottom deck, the top deck adapted to support an earth load applied to the top deck, at least a portion of the bottom deck adapted to allow a volume of water within the interior space to pass through the bottom deck to infiltrate the underlying surface,

wherein the plurality of support modules includes an inflow end column, an outflow end column, and an infill slab, the inflow end column comprising a through hole disposed in a side wall of the inflow end column near a top-deck-forming portion of the inflow end column, the outflow end column comprising a through hole disposed in a side wall of the outflow end column near a top-deck-forming portion of the outflow end column, wherein at least a one of the inflow end column and the outflow end column comprises a bottom corbel that extends from an outer surface of a sidewall of the one, the bottom corbel disposed within the interior space and overhanging a portion of the infill slab.

16. The storm water drain system of claim 15, wherein the system is sized such that a volume of water contained within the interior space occupies at least 80% of the interior space and the volume of water has a height that is less than a distance of the through holes from the bottom deck.

17. The storm water drain system of claim 15, wherein the infill slab comprises one or more through holes that pass through the infill slab.

18. The storm water drain system of claim 15, further comprising a second infill slab that forms a portion of the bottom deck, a gap formed between the infill slab and the second infill slab such that a flow path is formed between the interior space and the underlying surface.

19. The storm water drain system of claim 15, wherein at least one of the inflow end column and the outflow end column is a two-piece assembly comprising a top portion and a bottom portion.

20. The storm water drain system of claim 15, wherein at least one of the inflow end column and the outflow end column is monolithic.

* * * * *